

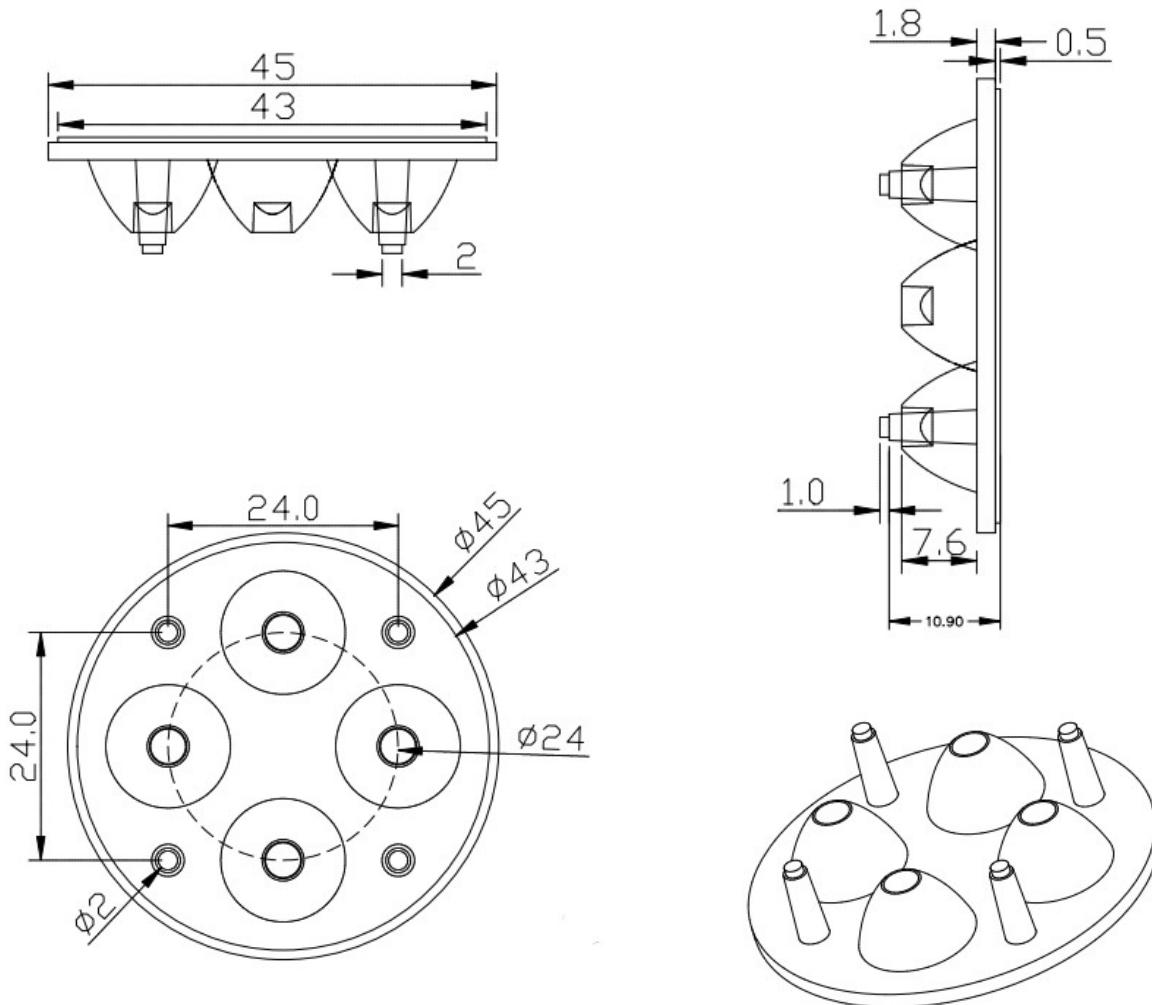
Product Parameters (产品描述)

出光角度 | Beam Angle: 5/10/15/20/25/30/38//45/60/85°
 产品材料 | Material: PMMA
 工作温度 | Work Temp: <85°C



支架颜色 | Holder Color: N/A
 透光率 | Transmittance: 93%
 匹配LED | Match Led: Dome/Flat 3030|3535 Leds

| Part Number | Lens Surface | Dimension | Beam Angle |
|-----------------|--------------|---------------|------------|
| KB-P45-5-4-XP | transparent | Φ45.0*H10.9mm | ~5° |
| KB-P45-10-4-XP | transparent | Φ45.0*H10.9mm | ~10° |
| KB-P45-15-4-XP | transparent | Φ45.0*H10.9mm | ~15° |
| KB-P45-20-4-XP | transparent | Φ45.0*H10.9mm | ~20° |
| KB-P45-25-4-XP | transparent | Φ45.0*H10.9mm | ~25° |
| KB-P45-30-4-XP | transparent | Φ45.0*H10.9mm | ~30° |
| KB-P45-38-4-XP | transparent | Φ45.0*H10.9mm | ~38° |
| KB-P45-45-4-XP | transparent | Φ45.0*H10.9mm | ~45° |
| KB-P45-60-4-XP | transparent | Φ45.0*H10.9mm | ~60° |
| KB-P45-85-4-XP | transparent | Φ45.0*H10.9mm | ~85° |
| KB-P45-5P-4-XP | beads | Φ45.0*H10.9mm | ~5° |
| KB-P45-10P-4-XP | beads | Φ45.0*H10.9mm | ~10° |
| KB-P45-15P-4-XP | beads | Φ45.0*H10.9mm | ~15° |
| KB-P45-20P-4-XP | beads | Φ45.0*H10.9mm | ~20° |
| KB-P45-25P-4-XP | beads | Φ45.0*H10.9mm | ~25° |
| KB-P45-30P-4-XP | beads | Φ45.0*H10.9mm | ~30° |
| KB-P45-38P-4-XP | beads | Φ45.0*H10.9mm | ~38° |
| KB-P45-45P-4-XP | beads | Φ45.0*H10.9mm | ~45° |
| KB-P45-60P-4-XP | beads | Φ45.0*H10.9mm | ~60° |
| KB-P45-85P-4-XP | beads | Φ45.0*H10.9mm | ~85° |

Mechanical Characteristics (产品尺寸):



Product Package (产品包装):

| Inner Box (内盒) | Outer Carton (外箱) |
|---|---|
|  |  |
| <p>49pcs/box Gross weight: 0.56kg/box Box dimension: 16*12*9cm</p> | <p>25boxes/carton 1,225pcs/carton Gross weight: 14.7kg/CTN Carton Dimension: 64*28*32cm</p> |