



Product Parameters (产品描述)

出光角度 | Beam Angle: 10/15/25/30/45/60/75°

产品材料 | Material: PMMA

工作温度 | Work Temp: <85°C

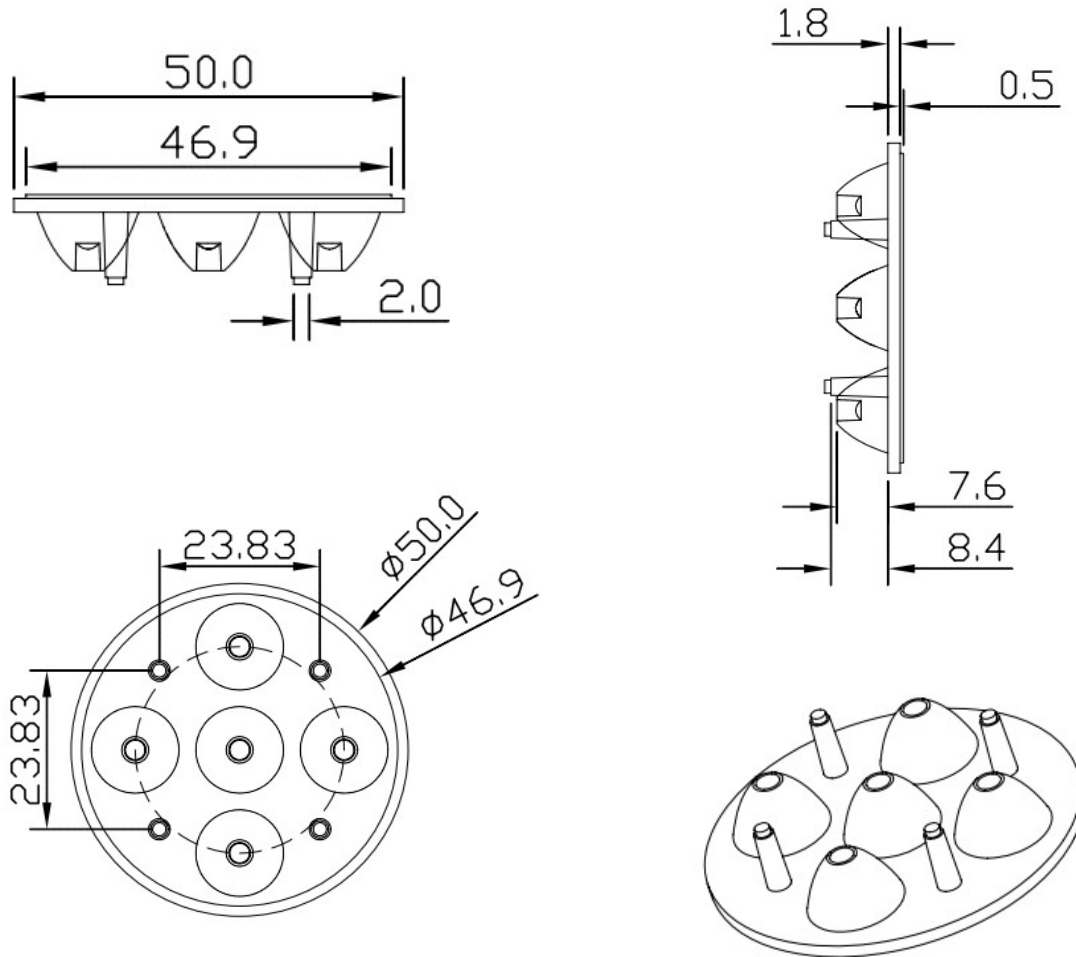
支架颜色 | Holder Color: N/A

透光率 | Transmittance: 93%

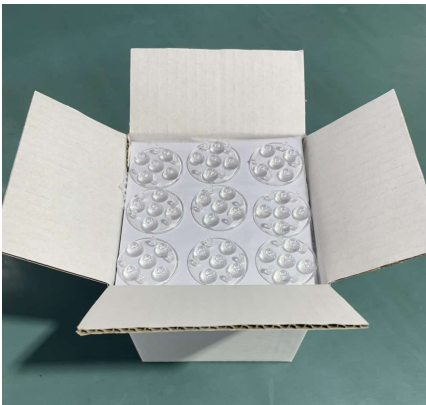

匹配LED | Match Led: Dome/Flat 3030|3535 Leds

Part Number	Lens Surface	Dimension	Beam Angle
KB-P50-10-3-XP	transparent	Φ50.0*H10.7mm	~10°
KB-P50-15-3-XP	transparent	Φ50.0*H10.7mm	~15°
KB-P50-25-3-XP	transparent	Φ50.0*H10.7mm	~25°
KB-P50-30-3-XP	transparent	Φ50.0*H10.7mm	~30°
KB-P50-45-3-XP	transparent	Φ50.0*H10.7mm	~45°
KB-P50-60-3-XP	transparent	Φ50.0*H10.7mm	~60°
KB-P50-75-3-XP	transparent	Φ50.0*H10.7mm	~75°
KB-P50-10P-3-XP	beads	Φ50.0*H10.7mm	~10°
KB-P50-15P-3-XP	beads	Φ50.0*H10.7mm	~15°
KB-P50-25P-3-XP	beads	Φ50.0*H10.7mm	~25°
KB-P50-30P-3-XP	beads	Φ50.0*H10.7mm	~30°
KB-P50-45P-3-XP	beads	Φ50.0*H10.7mm	~45°
KB-P50-60P-3-XP	beads	Φ50.0*H10.7mm	~60°
KB-P50-75P-3-XP	beads	Φ50.0*H10.7mm	~75°

Mechanical Characteristics (产品尺寸):



Product Package (产品包装):

Inner Box (内盒)	Outer Carton (外箱)
	
<p>36pcs/box Gross weight: 0.5kg/box Box dimension: 16*11*9cm</p>	<p>25boxes/carton 900pcs/carton Gross weight: 14.5kg/CTN Carton Dimension: 64*28*32cm</p>