



## Product Parameters (产品描述)

产品编号 | Part Number: KB-HB/SL24W-xx-3030  
出光角度 | Beam Angle: 20/30/60/90/120/ASY°  
产品材料 | Material: PC  
工作温度 | Work Temp: <105℃

安装方式 | Fastening: Screws  
支架颜色 | Holder Color: N/A  
透光率 | Transmittance: 93%  
匹配LED | Match Led: SMD3030




Part Number	Led QTY	Dimension	Beam Angle
KB-HB24W-20-3030	24pcs	L50*W50mm	~20°
KB-HB24W-30-3030	24pcs	L50*W50mm	~30°
KB-HB24W-60-3030	24pcs	L50*W50mm	~60°
KB-HB24W-90-3030	24pcs	L50*W50mm	~90°
KB-HB24W-120-3030	24pcs	L50*W50mm	~120°
KB-SL24W-TP2M-3030	24pcs	L50*W50mm	Type II-M
KB-SL24W-TP3M-3030	24pcs	L50*W50mm	Type III-M

## Direction for Use




### (透镜 | LENS)

- 1, Please use some soft paper or pure water to clean lens ( reflector)
- 2, Don't use any industrial solvent to clean lens surface , such as alcohol
- 3, Storage environment : Temperature 0~40℃ , Humidity 30%~95%
- 4, This kind of lens can make the lighting more concentrated, and it's made from transparent material , so please do not open the packages until you use them, in case of the dust and other pollutions.


**Light Distribution Curve (配光曲线图):**

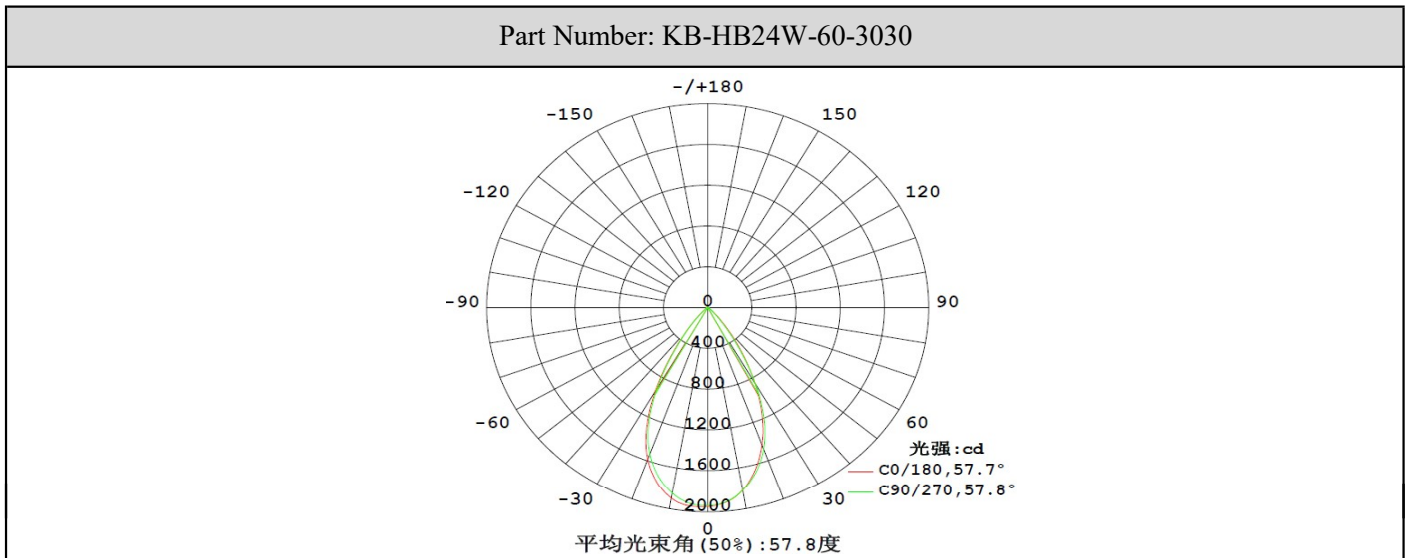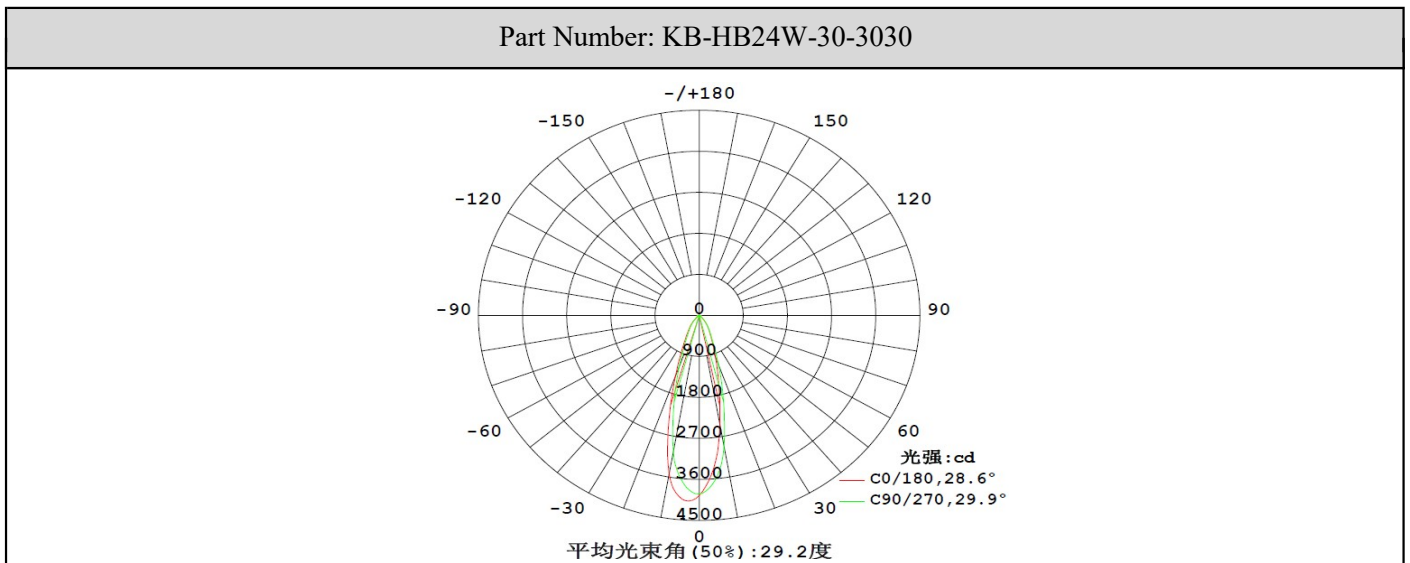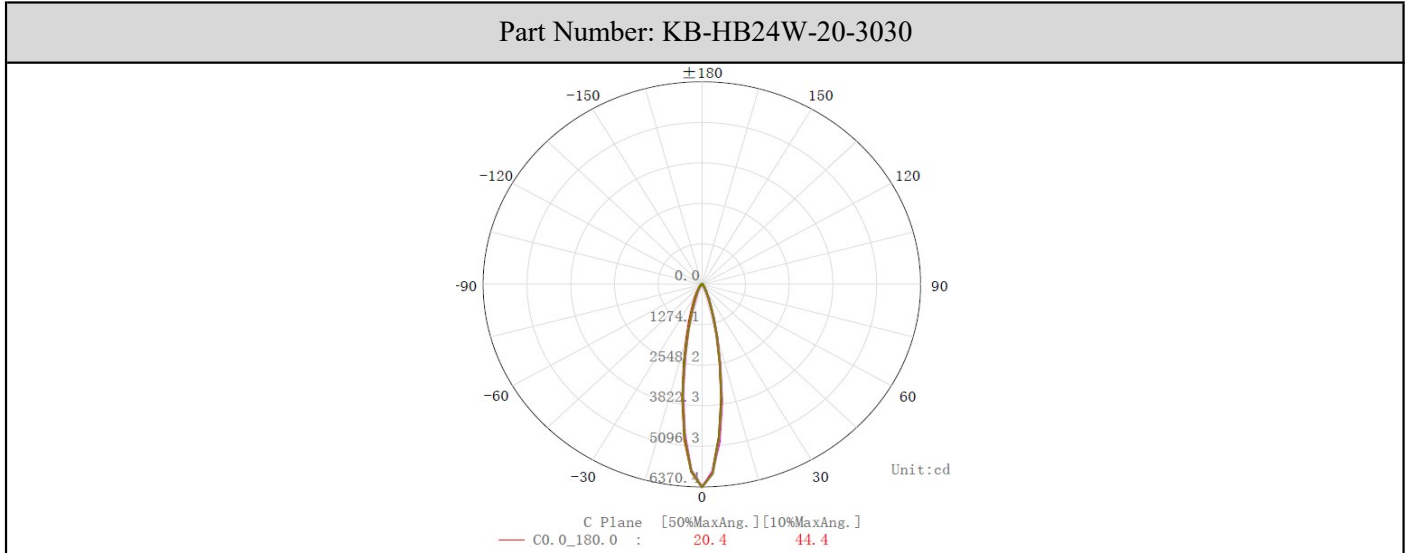

Light Distribution Curve (配光曲线图):

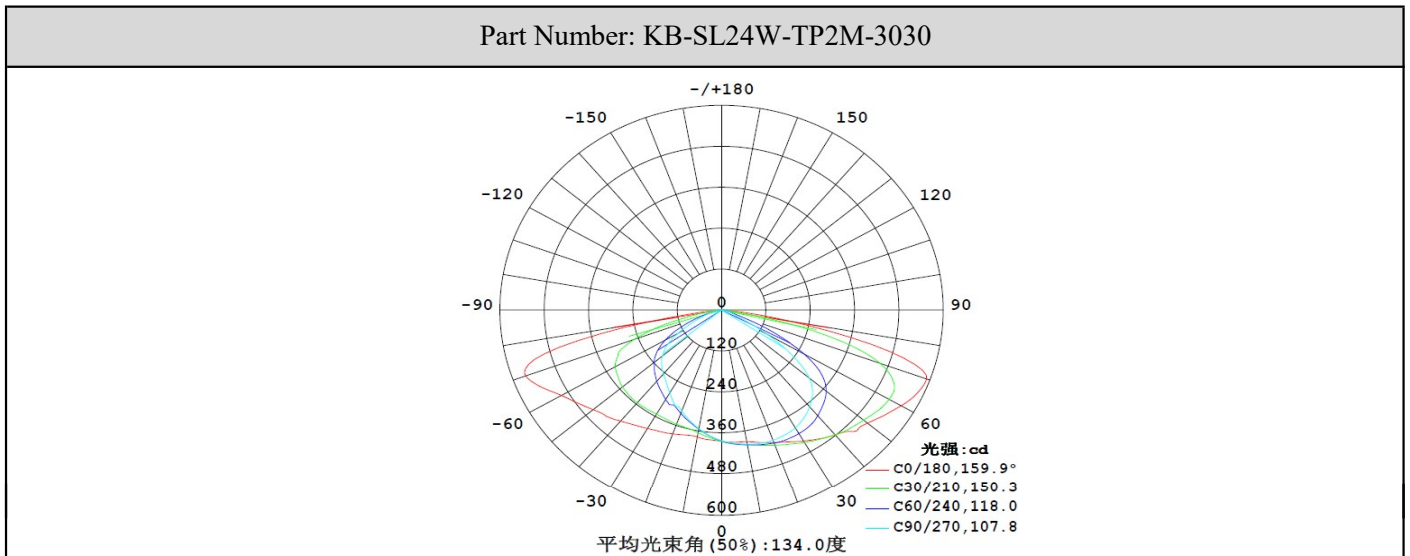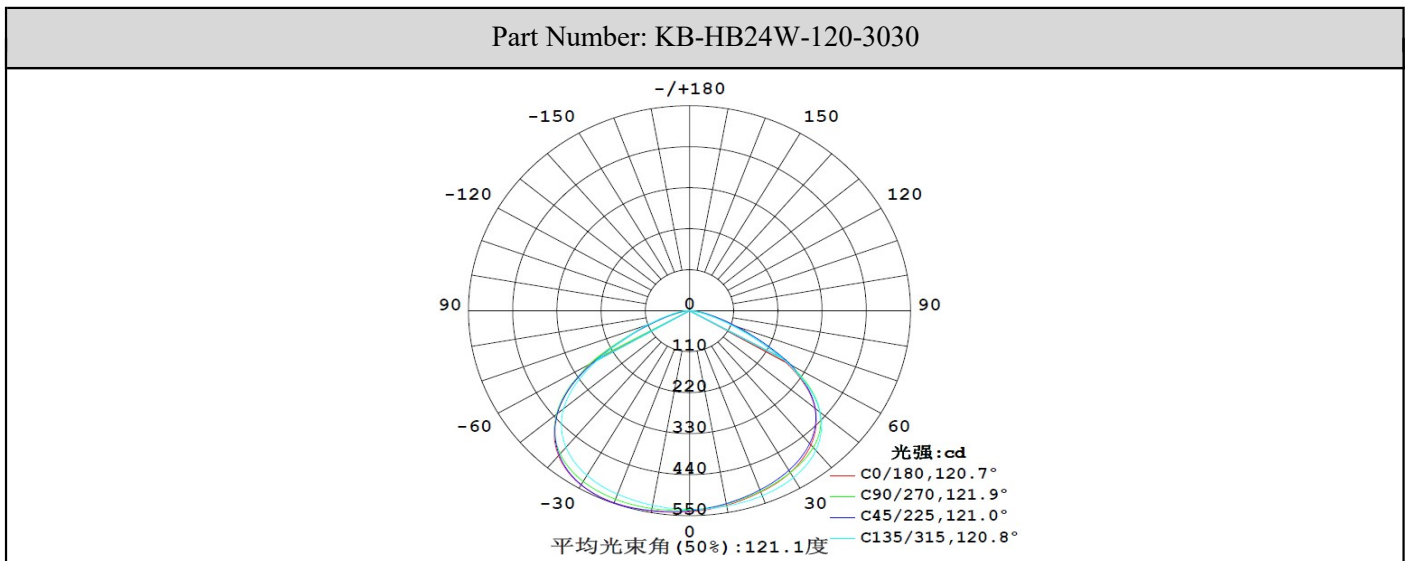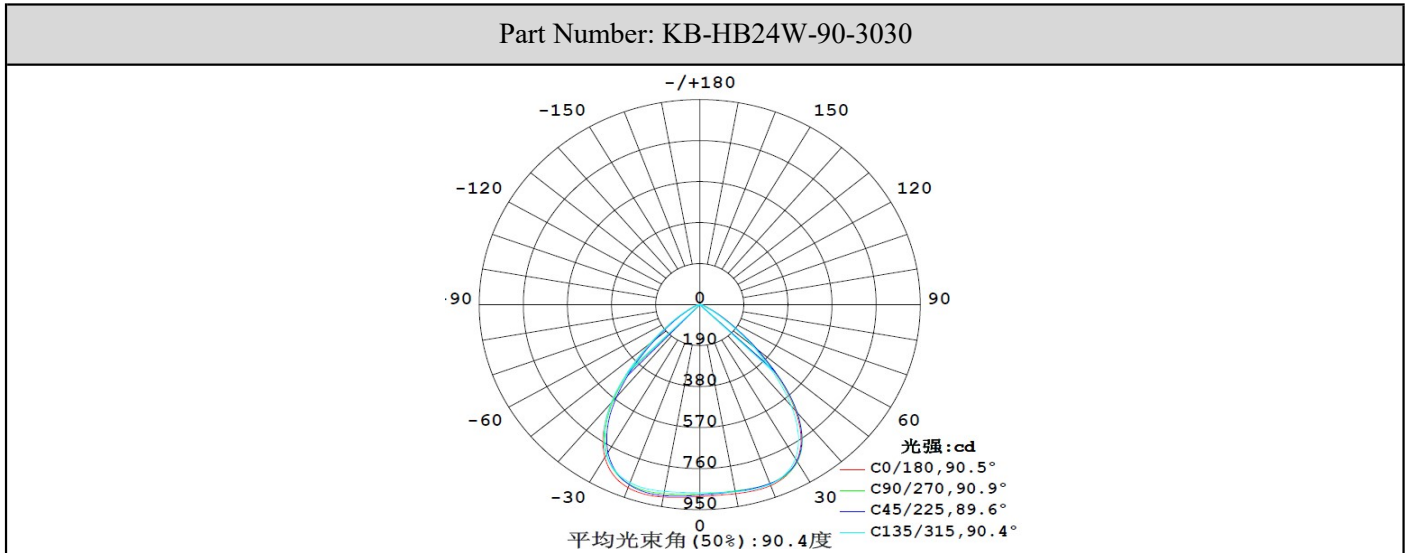

Light Distribution Curve (配光曲线图):

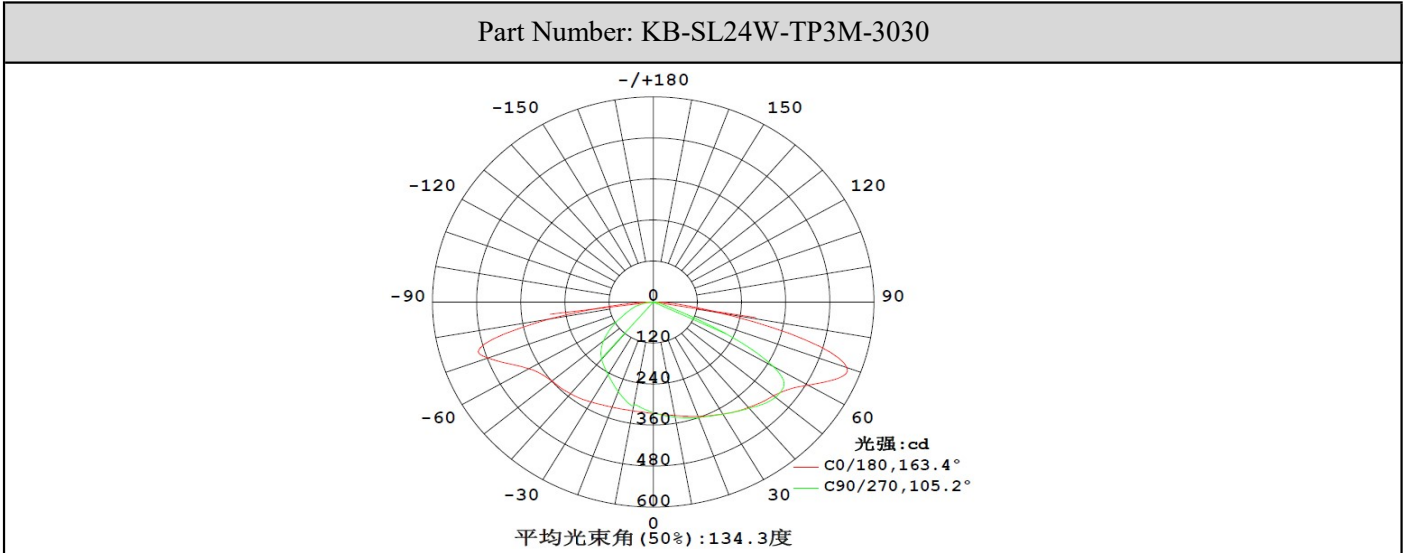

Mechanical Drawing (产品尺寸):

