







## Product Parameters (产品描述)

产品编号 | Part Number: KB-HB/SL12W-xx-3030  
出光角度 | Beam Angle: 15/30/60/90/120/ASY°  
产品材料 | Material: PC  
工作温度 | Work Temperature: <110°C





安装方式 | Fastening: Screws  
支架颜色 | Holder Color: N/A  
透光率 | Transmittance: 93%  
匹配LED | Match Led: SMD3030|2835

Part Number	Led QTY	Dimension	Beam Angle
KB-HB12W-30-3030	12pcs	L49.8*W49.8mm	~30°
KB-HB12W-60-3030	12pcs	L49.8*W49.8mm	~60°
KB-HB12W-90-3030	12pcs	L49.8*W49.8mm	~90°
KB-HB12W-120-3030	12pcs	L49.8*W49.8mm	~120°
KB-SL12W-TP2M-3030	12pcs	L49.8*W49.8mm	Type II-M
KB-SL12W-TP2M-3030-FC	12pcs	L49.8*W49.8mm	Type II-M Full Cut-off
KB-SL12W-TP3M-3030	12pcs	L49.8*W49.8mm	Type III-M
KB-SL12W-TP3M-3030-FC	12pcs	L49.8*W49.8mm	Type III-M Full Cut-off

Light Distribution Curve (配光曲线图):

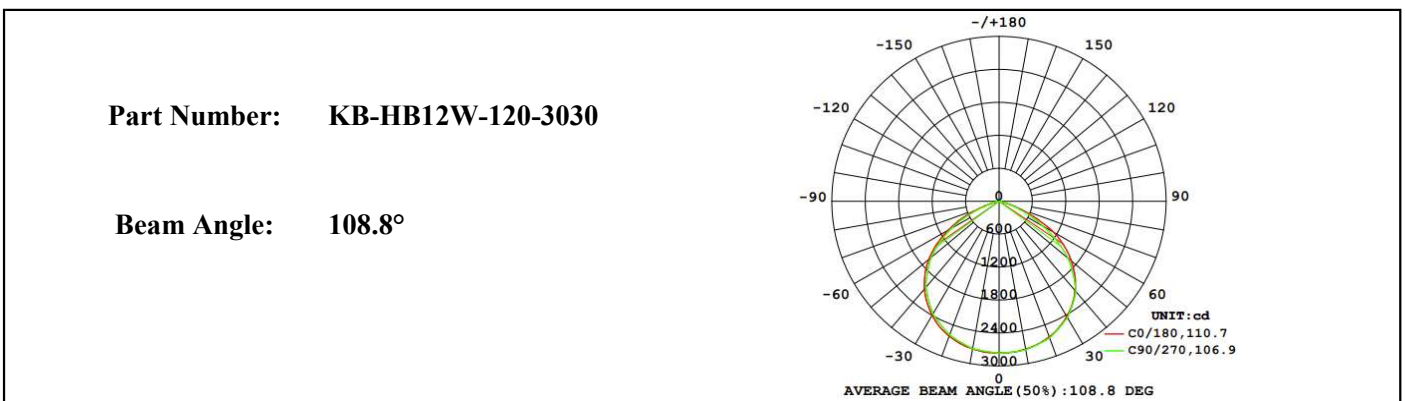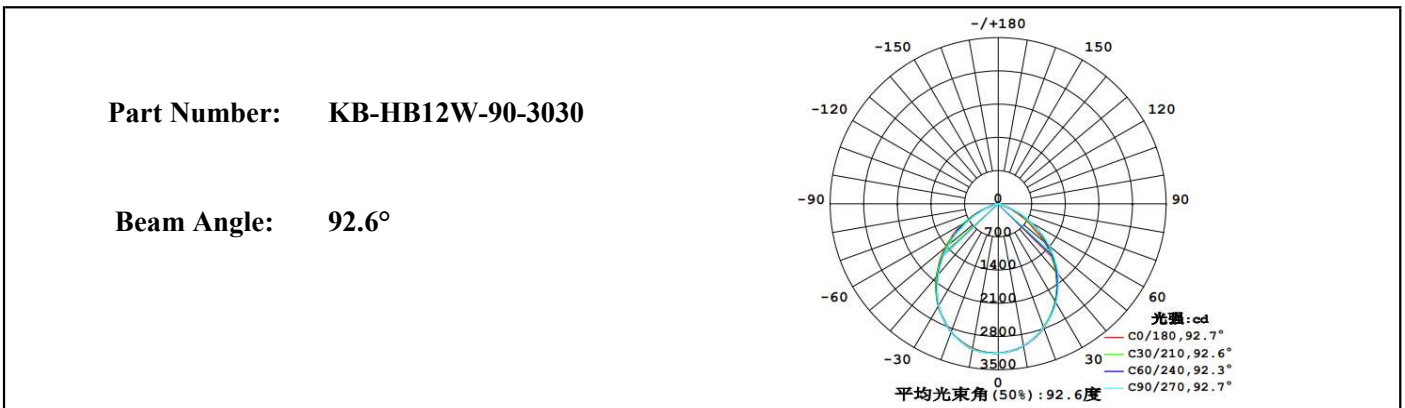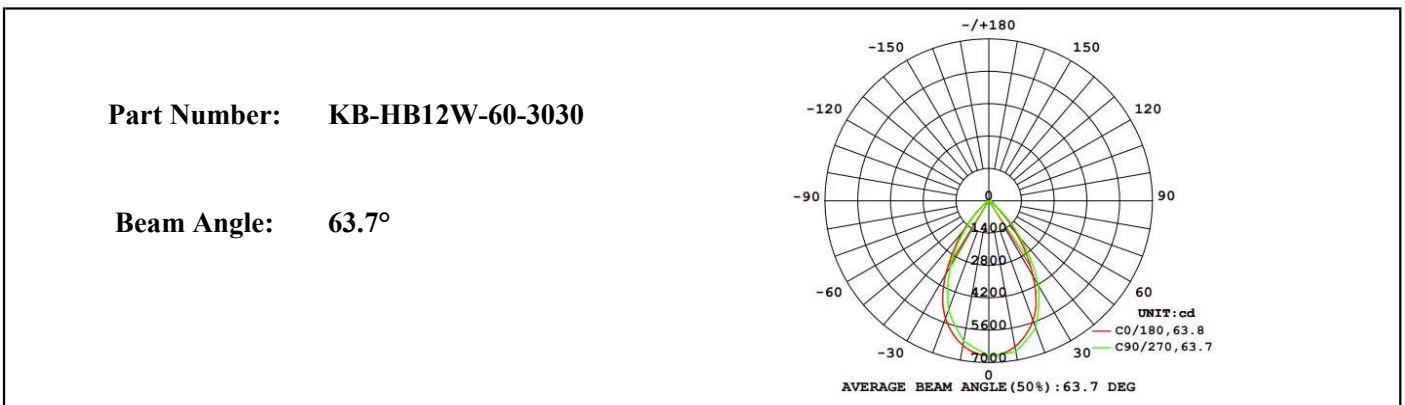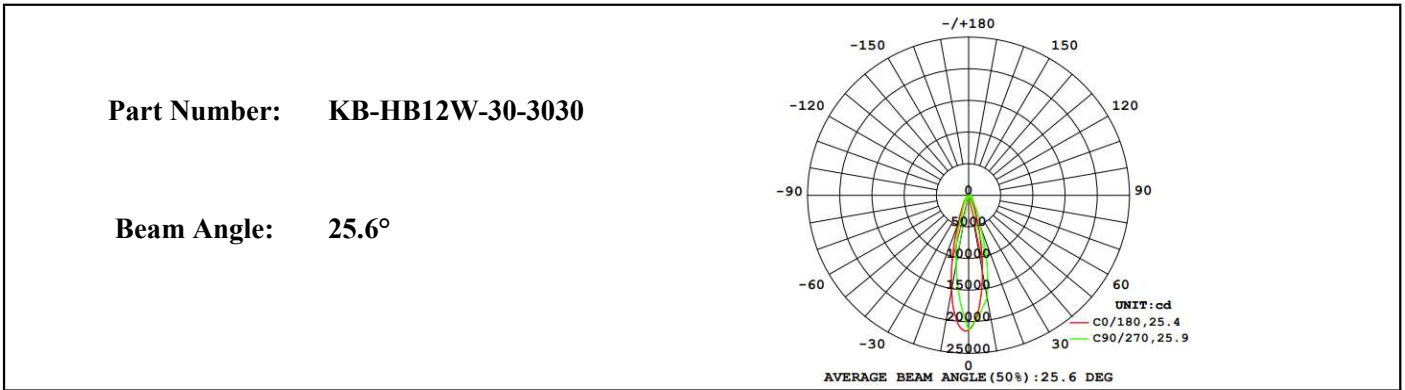

**Light Distribution Curve (配光曲线图):**

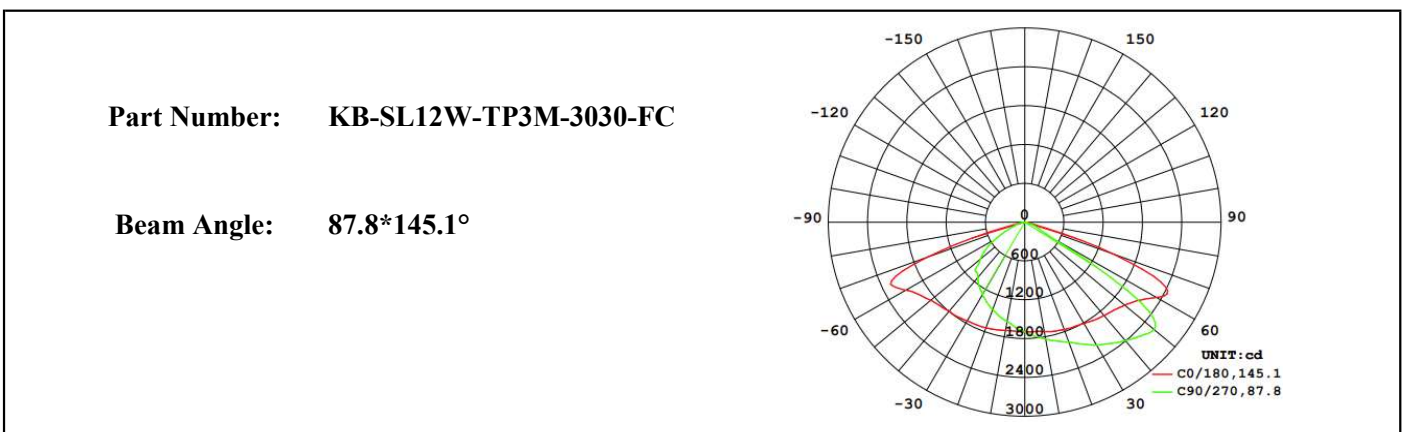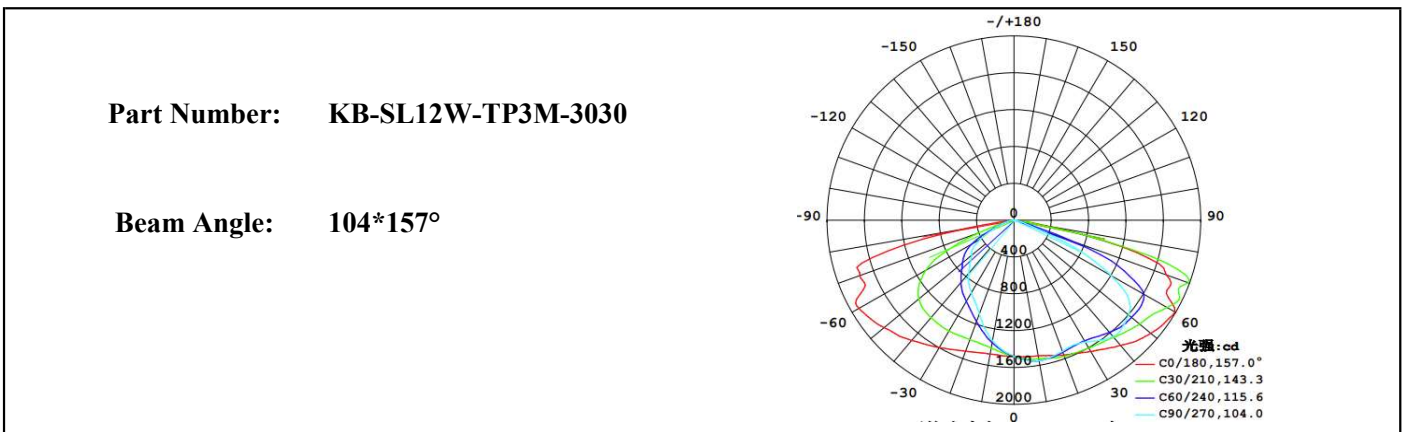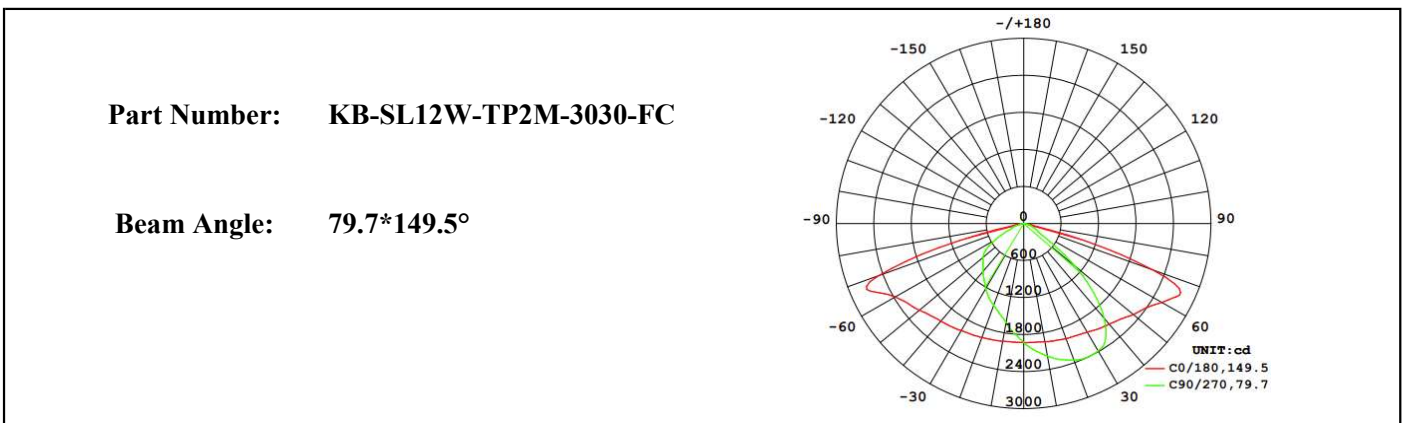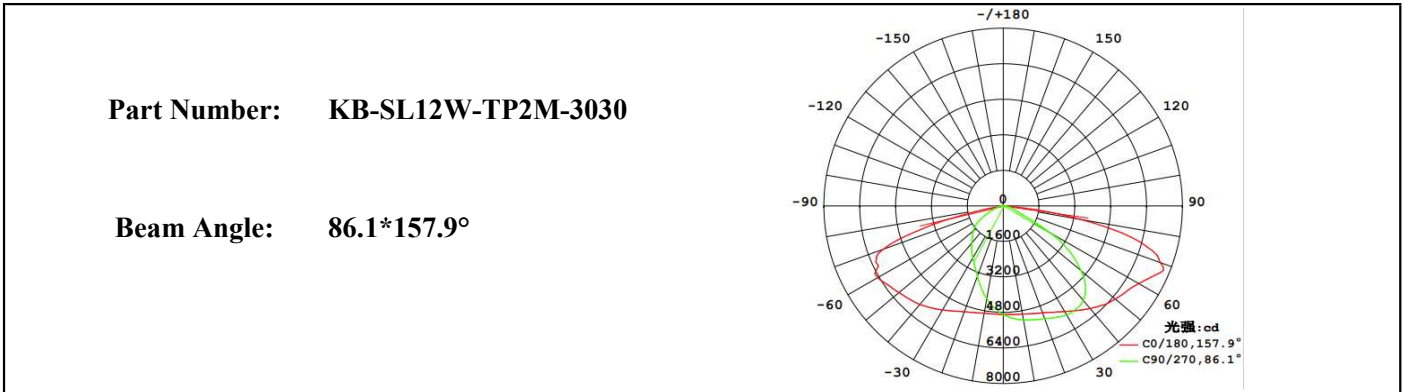

Mechanical Drawing (产品尺寸):

