

Product Parameters (产品描述)

产品编号 | Part Number: KB-LN297-xx-48H1

出光角度 | Beam Angle: 30/60/90/Double Asymmetric

产品材料 | Material: PMMA

工作温度 | Work Temp: <85℃

安装方式 | Fastening: Clips

防水圈 | Silica seal : N/A

透光率 | Transmittance: 93%

匹配LED | Match Led: SMD2835/3030 Leds



Part Number	Led Qty	Dimension	Beam Angle
KB-LN297-30-48H1	48pcs	L297*W60.8MM	~30°
KB-LN297-60-48H1	48pcs	L297*W60.8MM	~60°
KB-LN297-90-48H1	48pcs	L297*W60.8MM	~90°
KB-LN297-DAS-48H1	48pcs	L297*W60.8MM	Double Asymmetric

Direction for Use



(透镜 | LENS)

- 1, Please use some soft paper or pure water to clean lens (reflector)
- 2, Don't use any industrial solvent to clean lens surface , such as alcohol
- 3, Storage environment : Temperature 0~40℃ , Humidity 30%~95%
- 4, This kind of lens can make the lighting more concentrated, and it's made from transparent material , so please do not open the packages until you use them, in case of the dust and other pollutions.

Light Distribution Curve (配光曲线图):

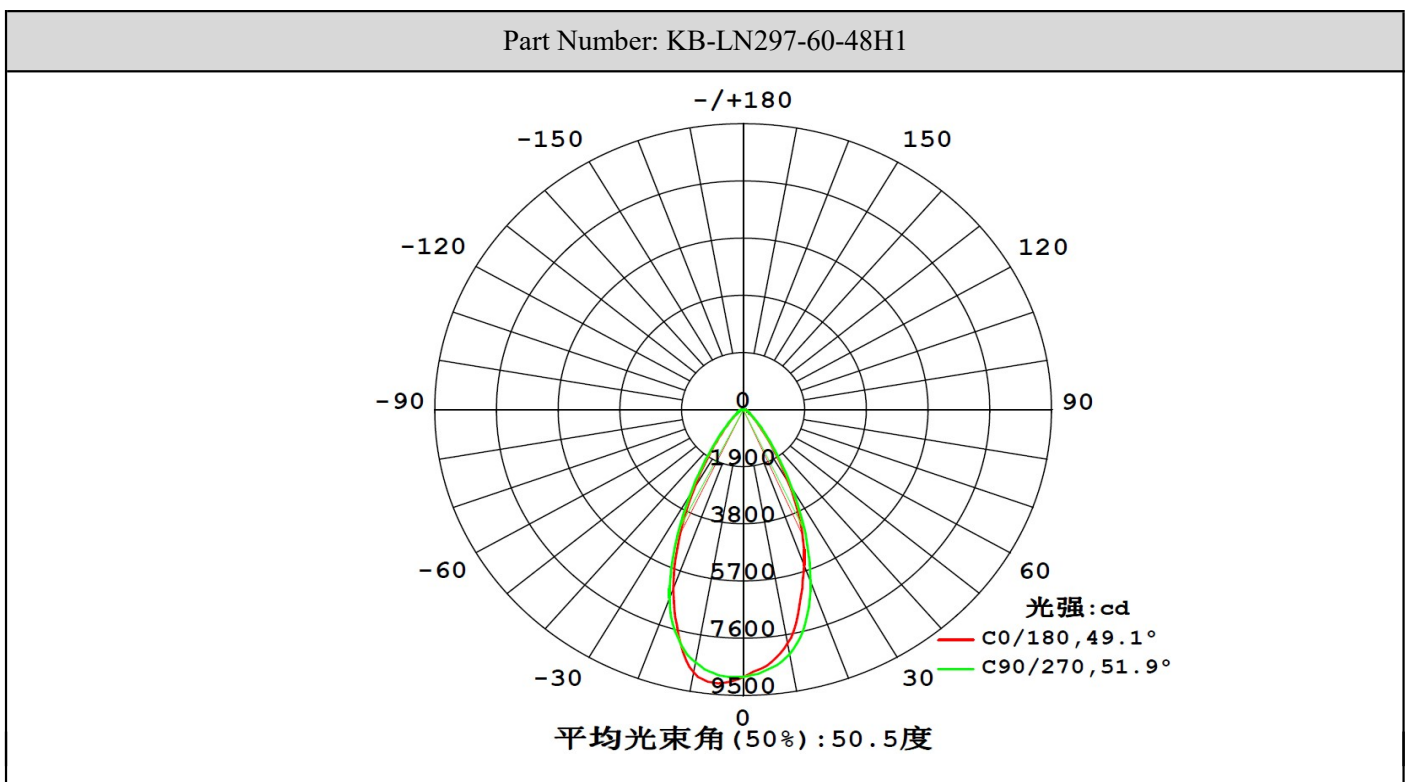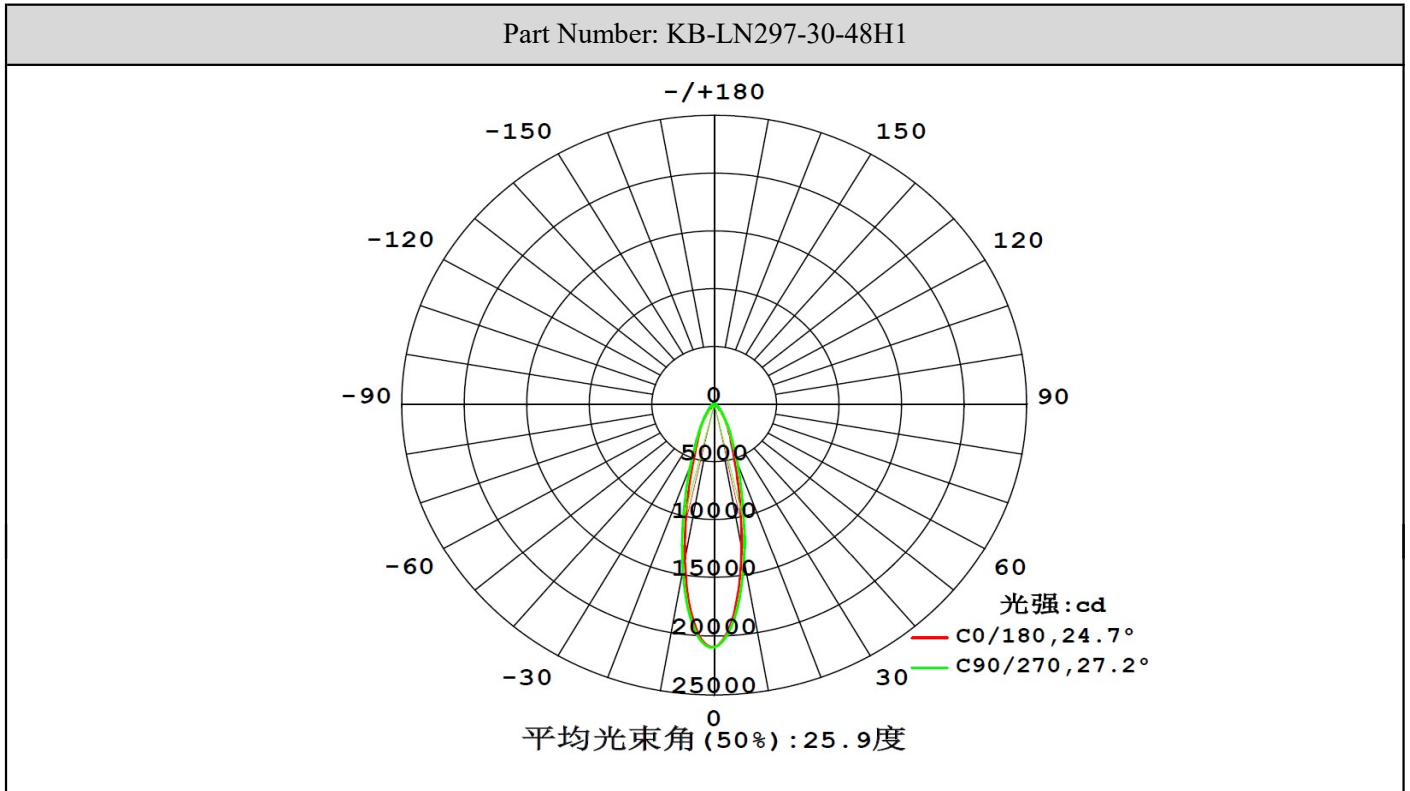

Light Distribution Curve (配光曲线图):

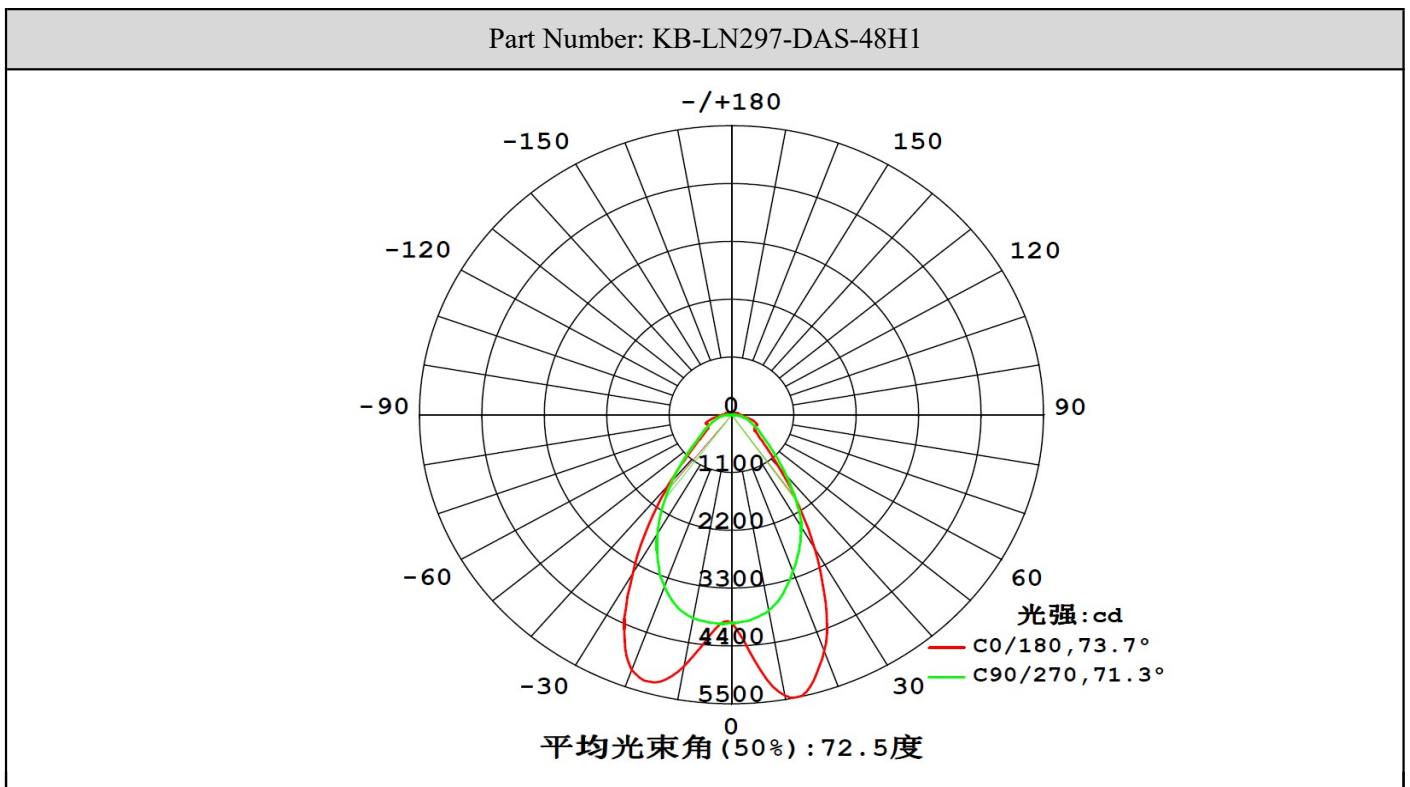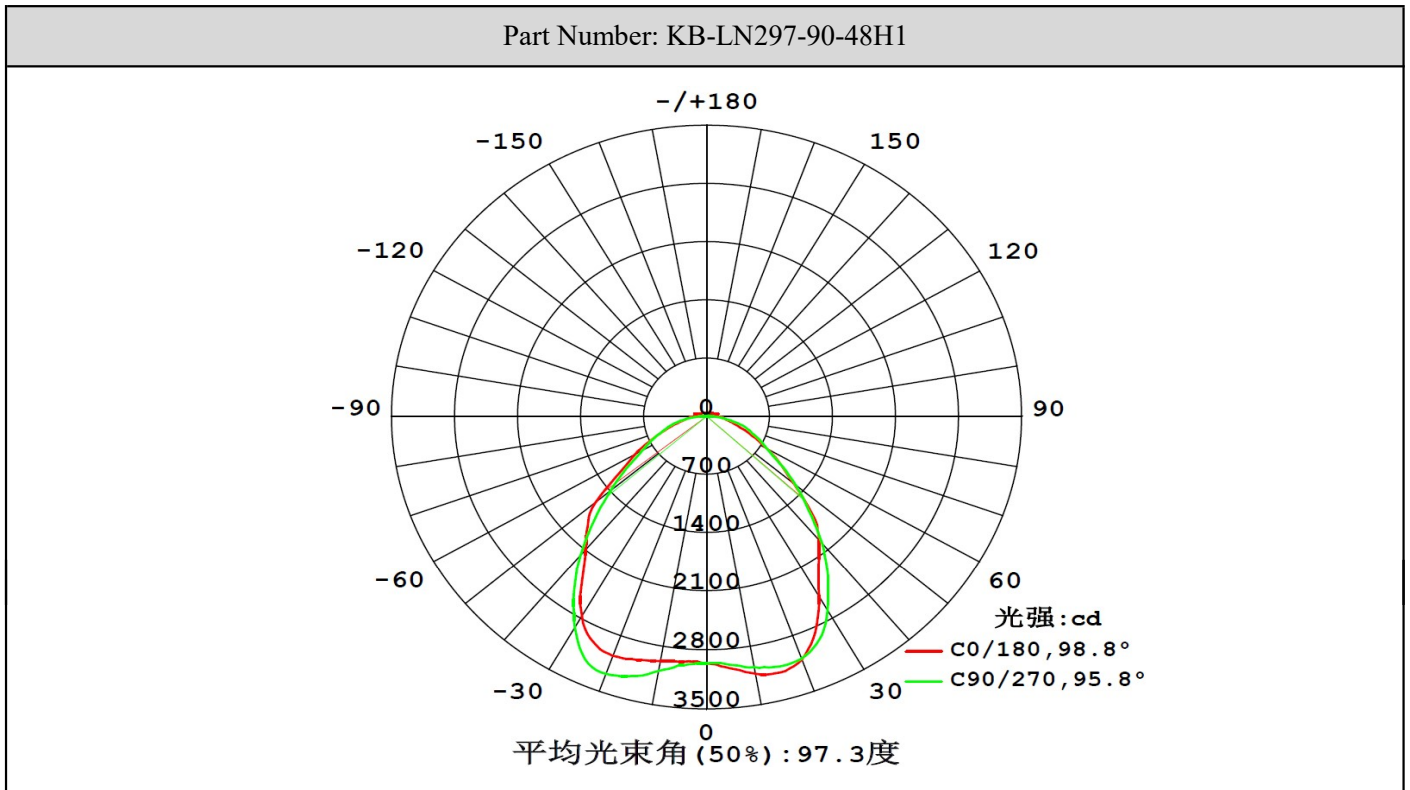

Mechanical Characteristics (产品尺寸):

