



### Product Parameters (产品描述)

出光角度 | Beam Angle: 15/25/30/45/60°  
 产品材料 | Material: PMMA  
 工作温度 | Work Temp: <85°C

支架颜色 | Holder Color: N/A  
 透光率 | Transmittance: 93%  
 匹配LED | Match Led: 3535 Leds

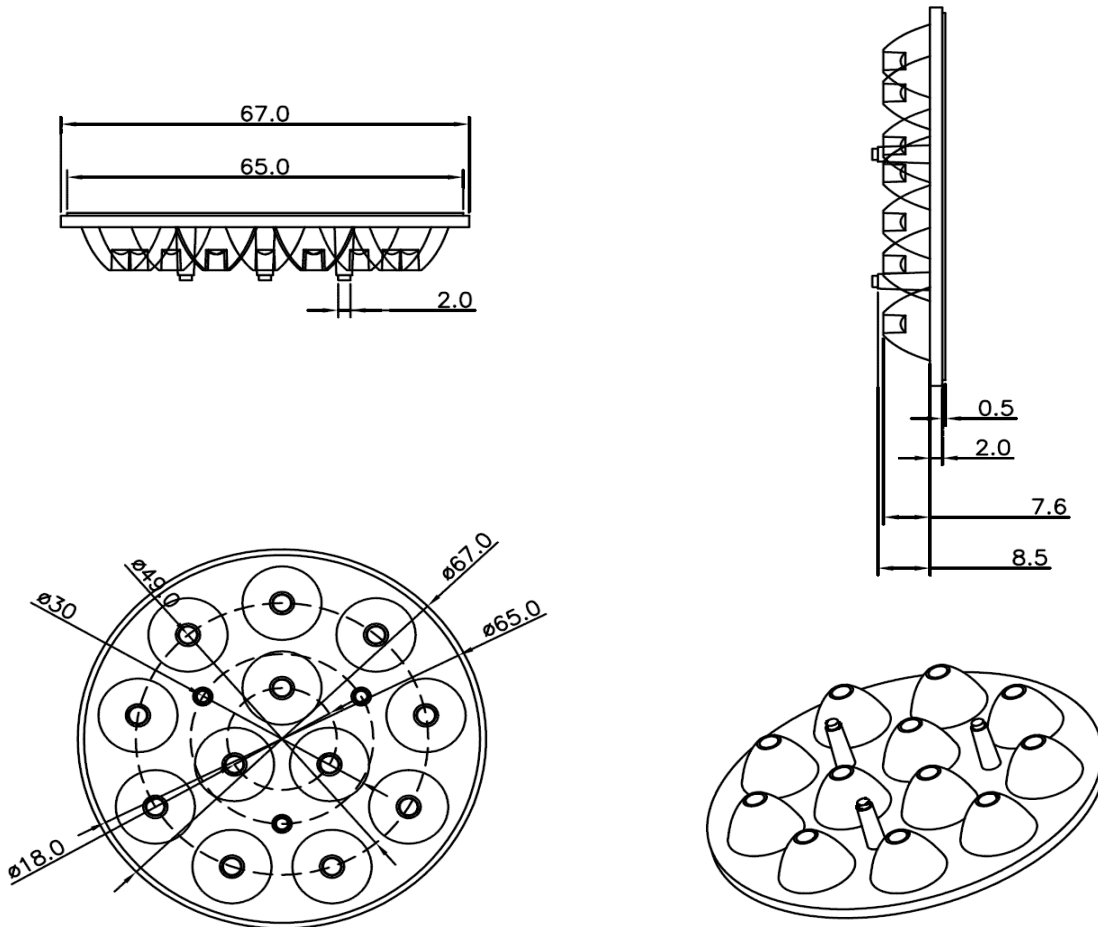
Part Number	Lens Surface	Dimension	Beam Angle
KB-P67-10-12-XP	transparent	Φ67.0*H11.0mm	~10°
KB-P67-15-12-XP	transparent	Φ67.0*H11.0mm	~15°
KB-P67-20-12-XP	transparent	Φ67.0*H11.0mm	~20°
KB-P67-30-12-XP	transparent	Φ67.0*H11.0mm	~30°
KB-P67-45-12-XP	transparent	Φ67.0*H11.0mm	~45°
KB-P67-60-12-XP	transparent	Φ67.0*H11.0mm	~60°
KB-P67-70-12-XP	transparent	Φ67.0*H11.0mm	~70°
KB-P67-10P-12-XP	beads	Φ67.0*H11.0mm	~10°
KB-P67-15P-12-XP	beads	Φ67.0*H11.0mm	~15°
KB-P67-20P-12-XP	beads	Φ67.0*H11.0mm	~20°
KB-P67-30P-12-XP	beads	Φ67.0*H11.0mm	~30°
KB-P67-45P-12-XP	beads	Φ67.0*H11.0mm	~45°
KB-P67-60P-12-XP	beads	Φ67.0*H11.0mm	~60°
KB-P67-70P-12-XP	beads	Φ67.0*H11.0mm	~70°

### Direction for Use

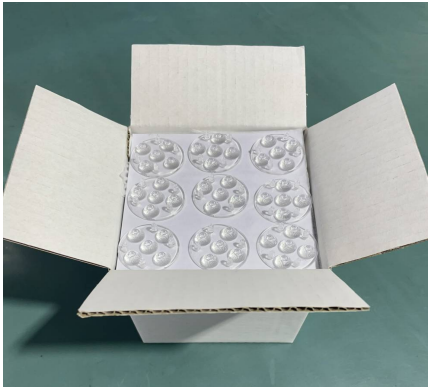

#### (透镜 | LENS)

- 1, Please use some soft paper or pure water to clean lens ( reflector)
- 2, Don't use any industrial solvent to clean lens surface , such as alcohol
- 3, Storage environment : Temperature 0~40°C , Humidity 30%~95%
- 4, This kind of lens can make the lighting more concentrated, and it's made from transparent material , so please do not open the packages until you use them, in case of the dust and other pollutions.

**Mechanical Characteristics (产品尺寸):**



**Product Package (产品包装):**

Inner Box (内盒)	Outer Carton (外箱)
	
<p>400pcs/carton Gross weight: 12kg/CTN Carton Dimension: 43*34*29cm</p>	