



Product Parameters (产品描述)

产品编号 | Part Number: KB-SL56W-xx-3030
 出光角度 | Beam Angle: 30/60/90/30*70/60*90/ASY
 产品材料 | Material: PC
 工作温度 | Work Temp: <105°C

安装方式 | Fastening: Screw
 防水圈 | Silica seal : available
 透光率 | Transmittance: 93%
 匹配LED | Match Led: SMD3030




Part Number	Led Qty	Dimension	Beam Angle
KB-SL56W-30-3030	56pcs	L256.6*W78.6MM	~30°
KB-SL56W-60-3030	56pcs	L256.6*W78.6MM	~60°
KB-SL56W-90-3030	56pcs	L256.6*W78.6MM	~90°
KB-SL56W-3070-3030	56pcs	L256.6*W78.6MM	~30*70°
KB-SL56W-6090-3030	56pcs	L256.6*W78.6MM	~60*90°
KB-SL56W-40130-3030	56pcs	L256.6*W78.6MM	~40*130°
KB-SL56W-90120-3030	56pcs	L256.6*W78.6MM	~90*120°
KB-SL56W-70145-3030	56pcs	L256.6*W78.6MM	~70*145°
KB-SL56W-80155-3030	56pcs	L256.6*W78.6MM	~80*155°

Direction for Use




(透镜 | LENS)

- 1, Please use some soft paper or pure water to clean lens (reflector)
- 2, Don't use any industrial solvent to clean lens surface , such as alcohol
- 3, Storage environment : Temperature 0~40°C , Humidity 30%~95%
- 4, This kind of lens can make the lighting more concentrated, and it's made from transparent material , so please do not open the packages until you use them, in case of the dust and other pollutions.




Light Distribution Curve (配光曲线图):

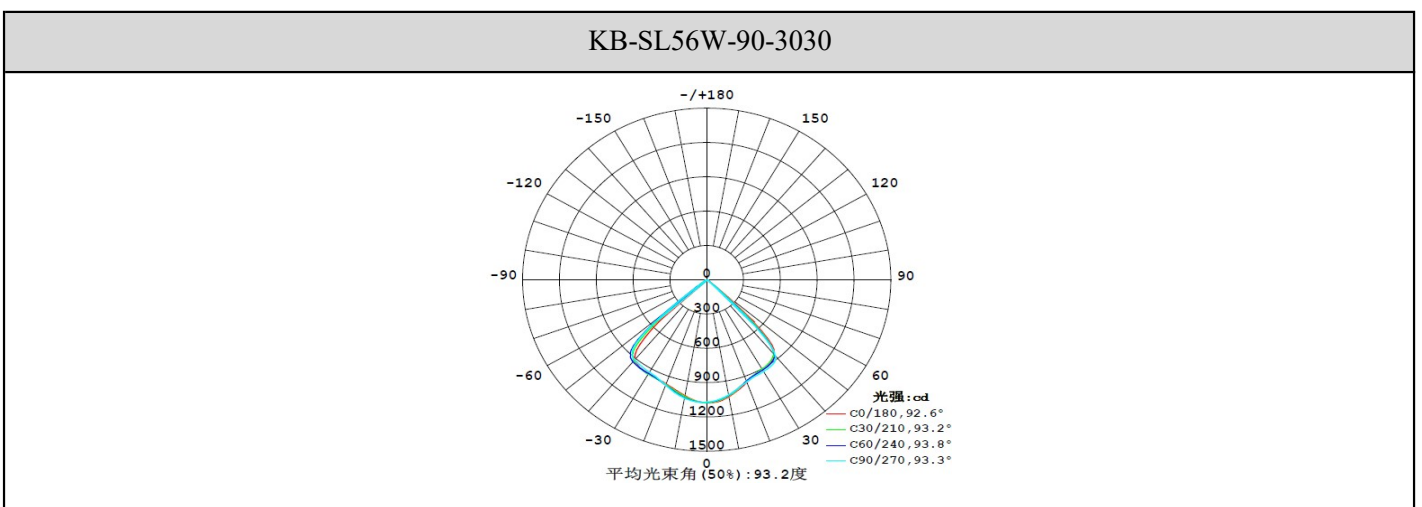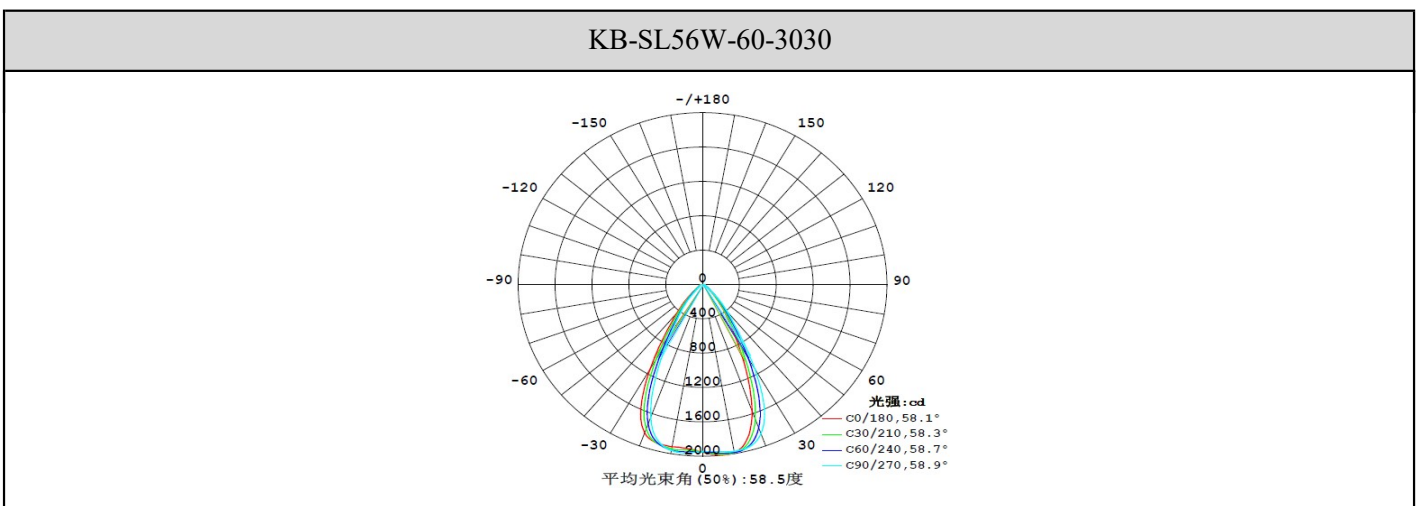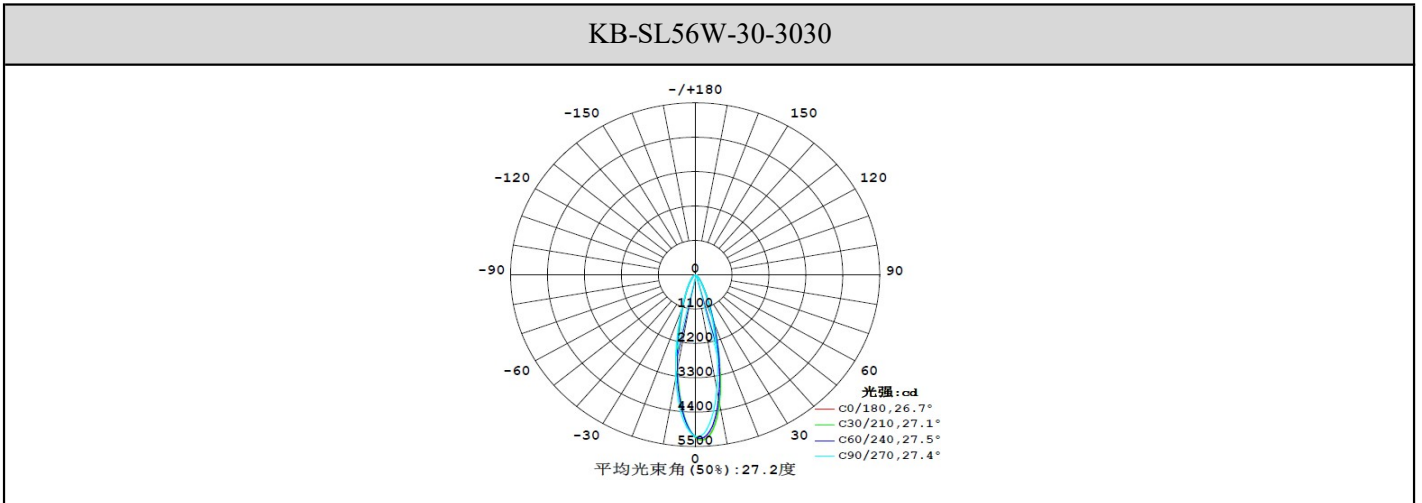


Light Distribution Curve (配光曲线图):

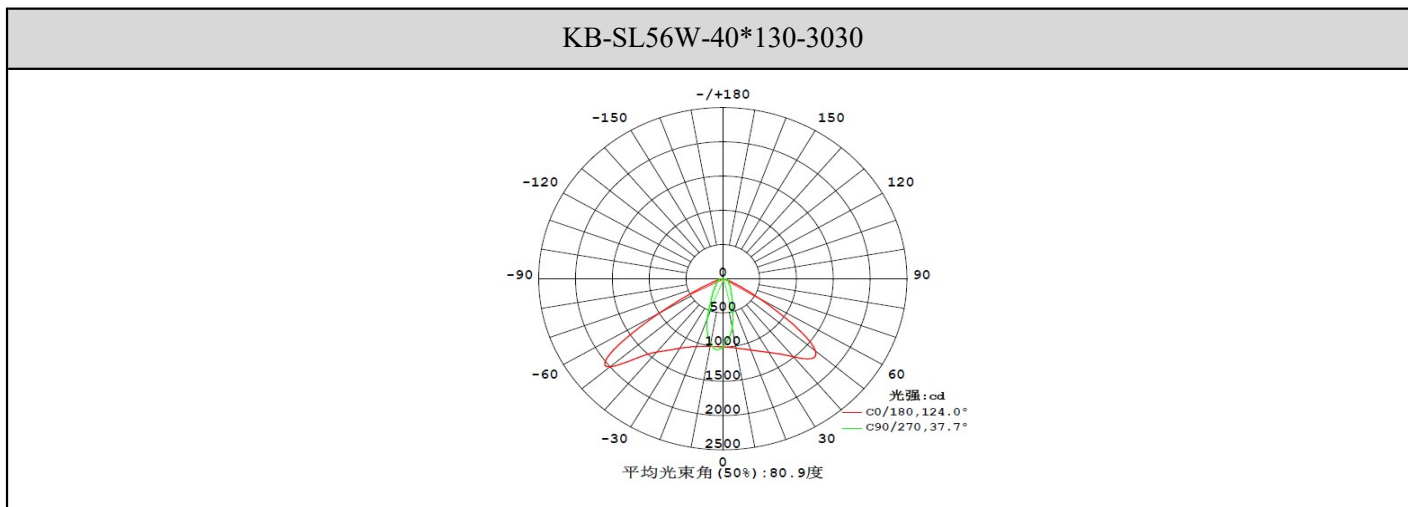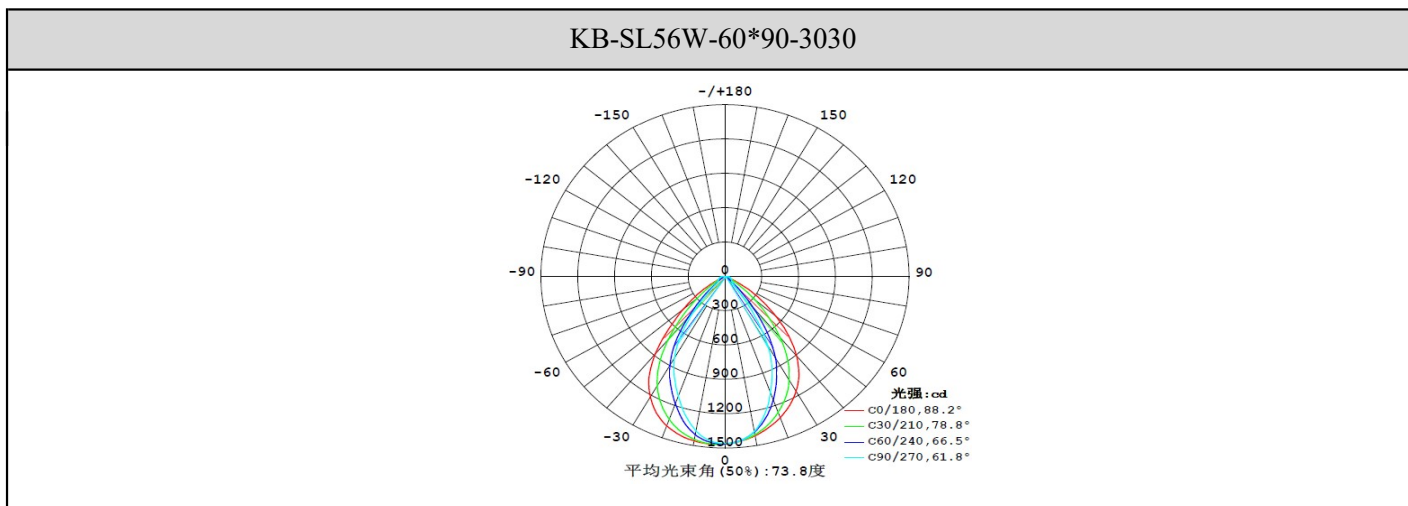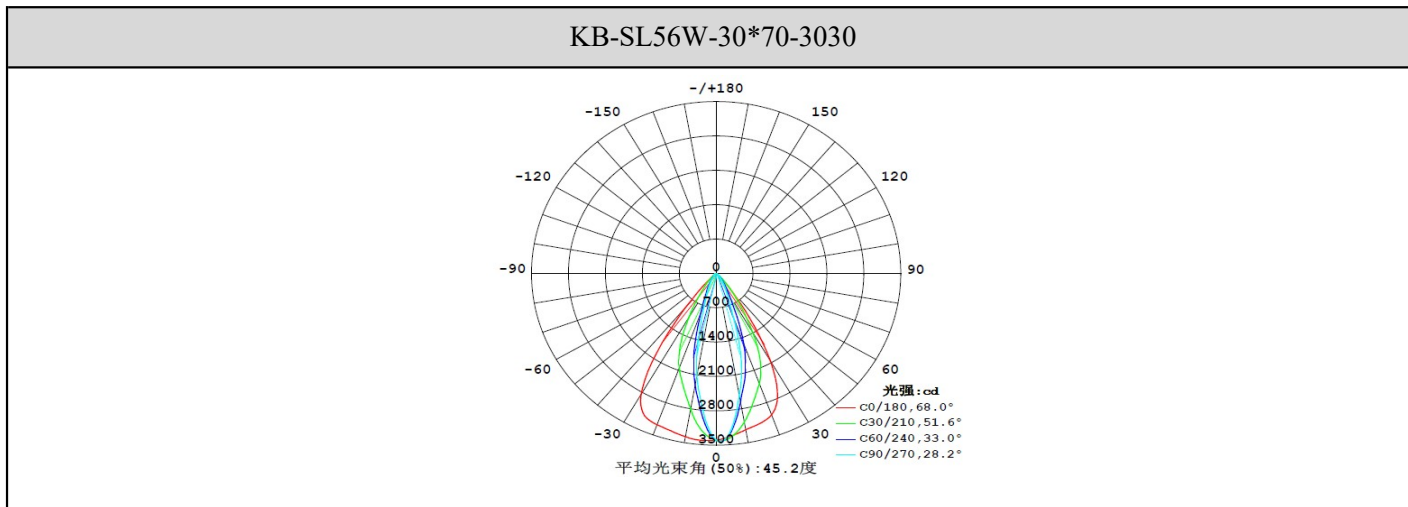

Light Distribution Curve (配光曲线图):

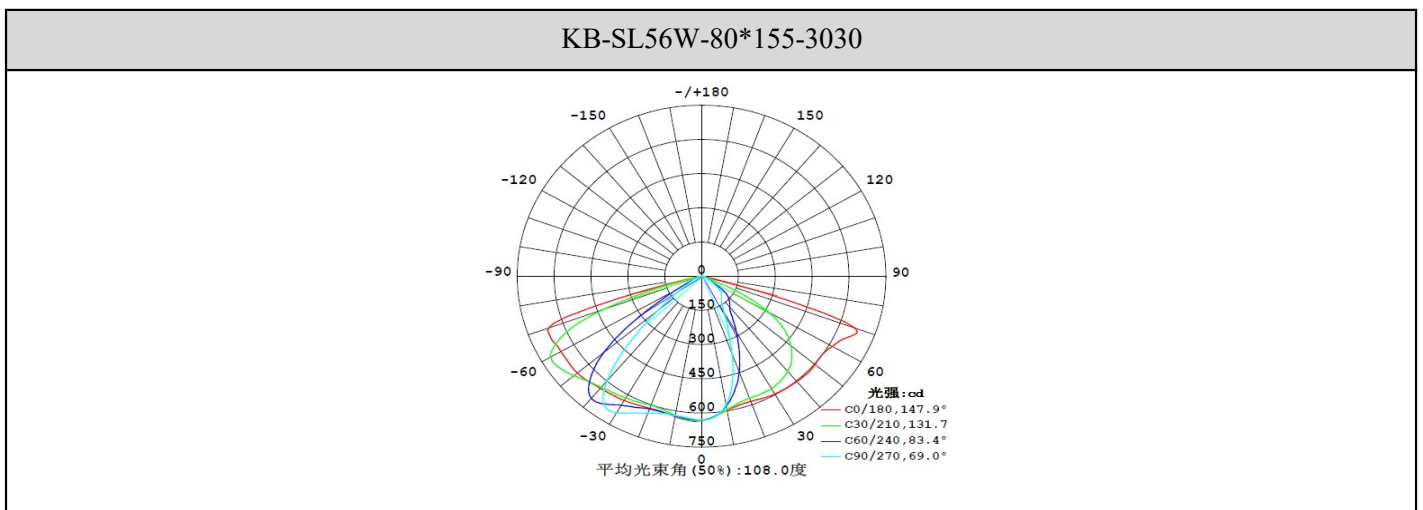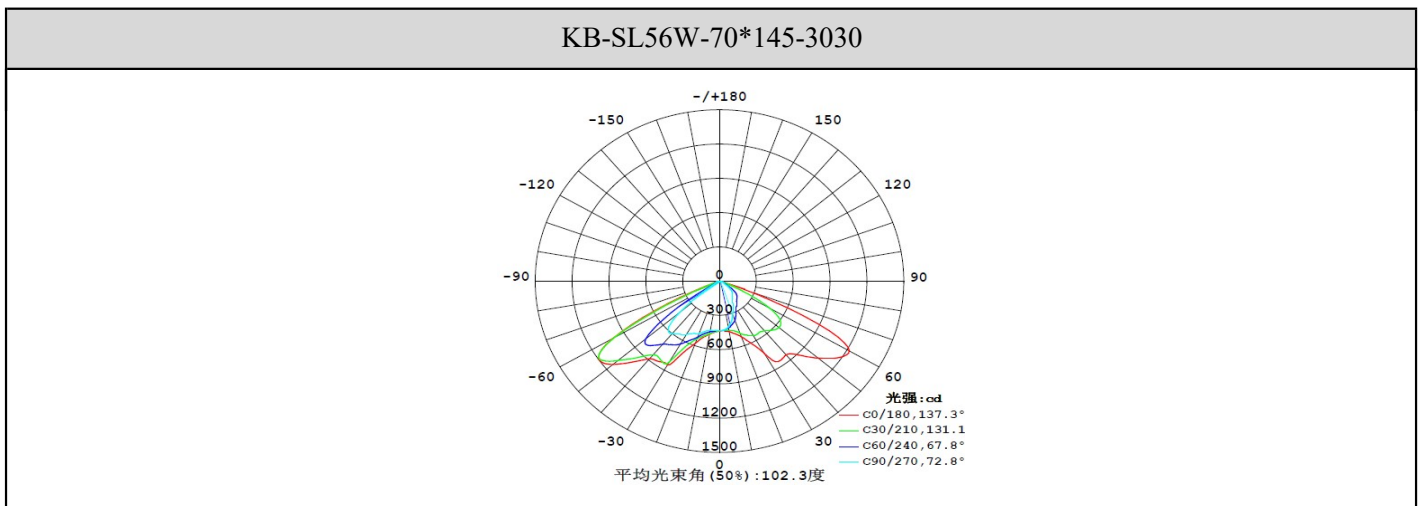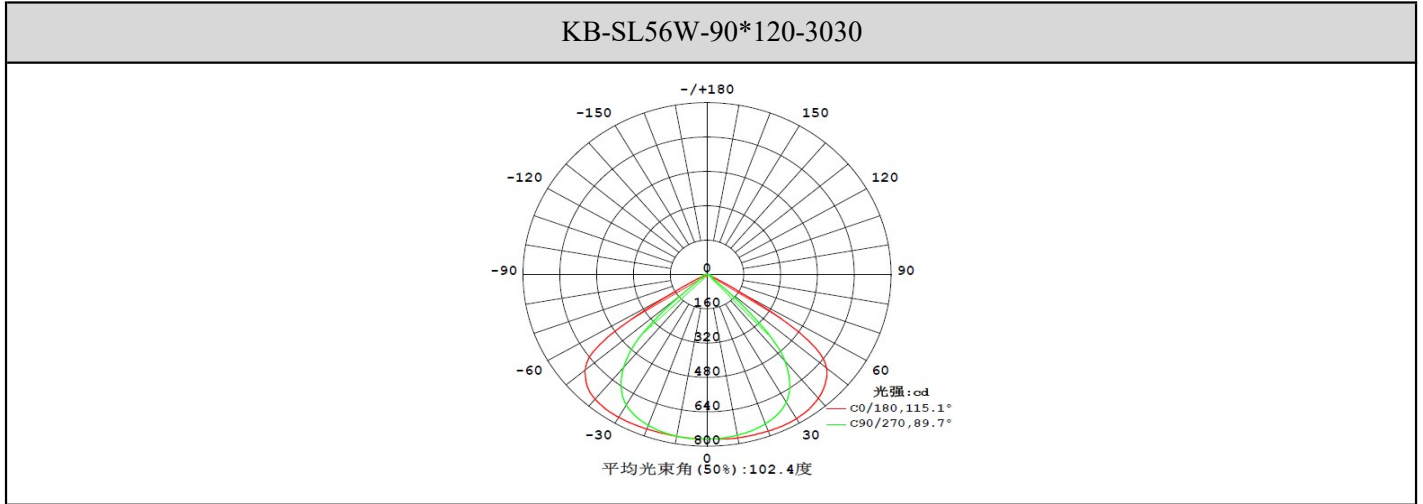

Mechanical Characteristics (产品尺寸):

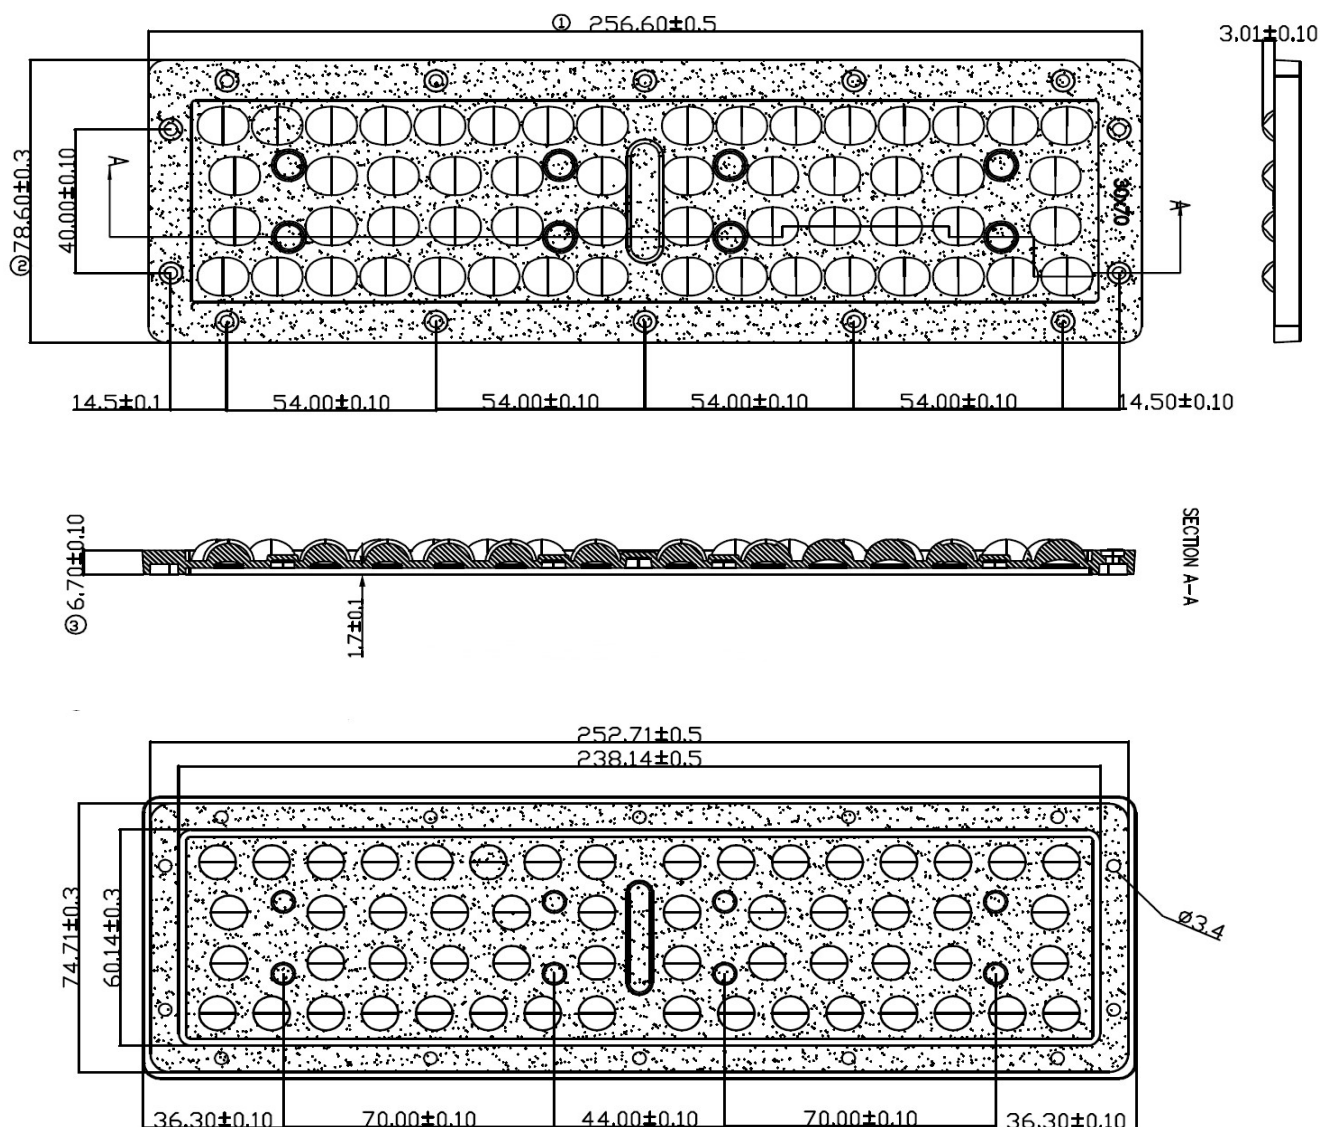

Packing Information (包装信息):



Lens: 174pcs/carton
Carton Size: 43*34*29CM
Gross weight: 15.3kg

Silica Gasket: 1000pcs/carton
Carton Size: 43*34*29CM
Gross weight: 17.6kg