



### Product Parameters (产品描述)

|                     |                    |                      |           |
|---------------------|--------------------|----------------------|-----------|
| 产品编号   Part Number: | KB-SL64W-xx-3030-S | 安装方式   Fastening:    | Screw     |
| 出光角度   Beam Angle:  | 60/90/80*150°      | 防水圈   Silica seal:   | available |
| 产品材料   Material:    | PC                 | 透光率   Transmittance: | 93%       |
| 工作温度   Work Temp:   | <105°C             | 匹配LED   Match Led:   | SMD3030   |




| Part Number           | LED Qty | Dimension   | Beam Angle |
|-----------------------|---------|-------------|------------|
| KB-SL64W-60-3030-S    | 64pcs   | L130*W130MM | ~60°       |
| KB-SL64W-90-3030-S    | 64pcs   | L130*W130MM | ~90°       |
| KB-SL64W-80150-3030-S | 64pcs   | L130*W130MM | ~80*150°   |

### Direction for Use

#### (透镜 | LENS)

- 1, Please use some soft paper or pure water to clean lens ( reflector)
- 2, Don't use any industrial solvent to clean lens surface , such as alcohol
- 3, Storage environment : Temperature 0~40°C , Humidity 30%~95%
- 4, This kind of lens can make the lighting more concentrated, and it's made from transparent material , so please do not open the packages until you use them, in case of the dust and other pollutions.

Light Distribution Curve (配光曲线图):

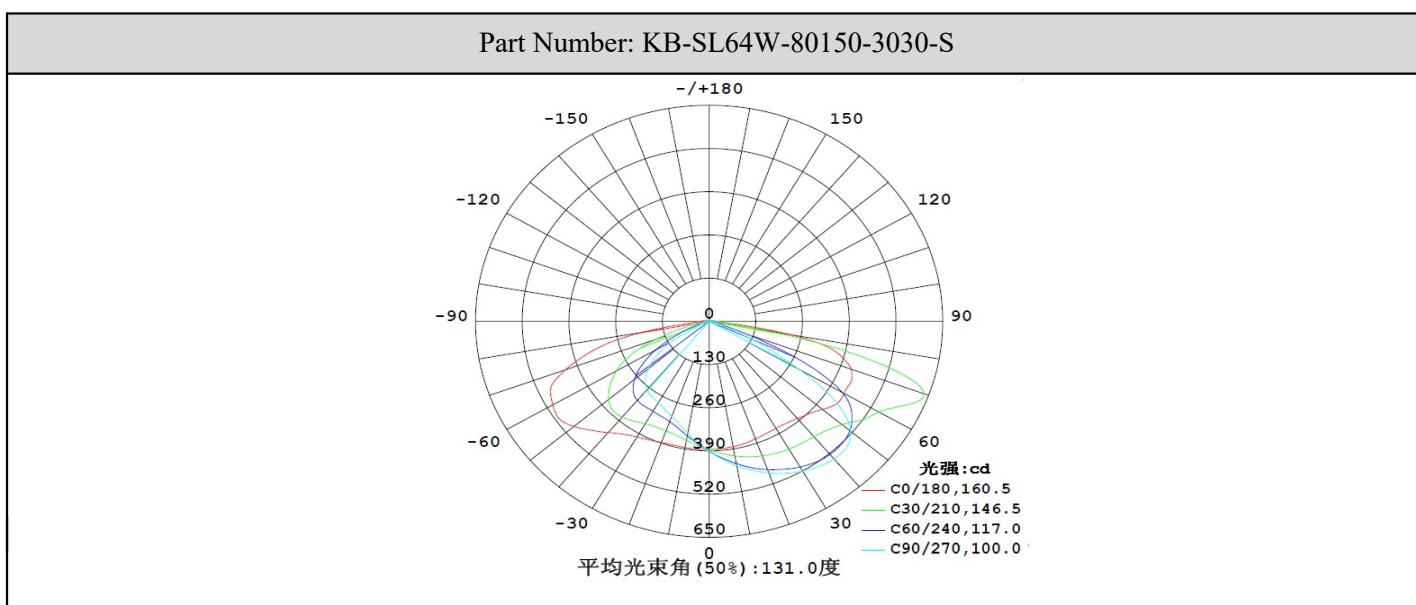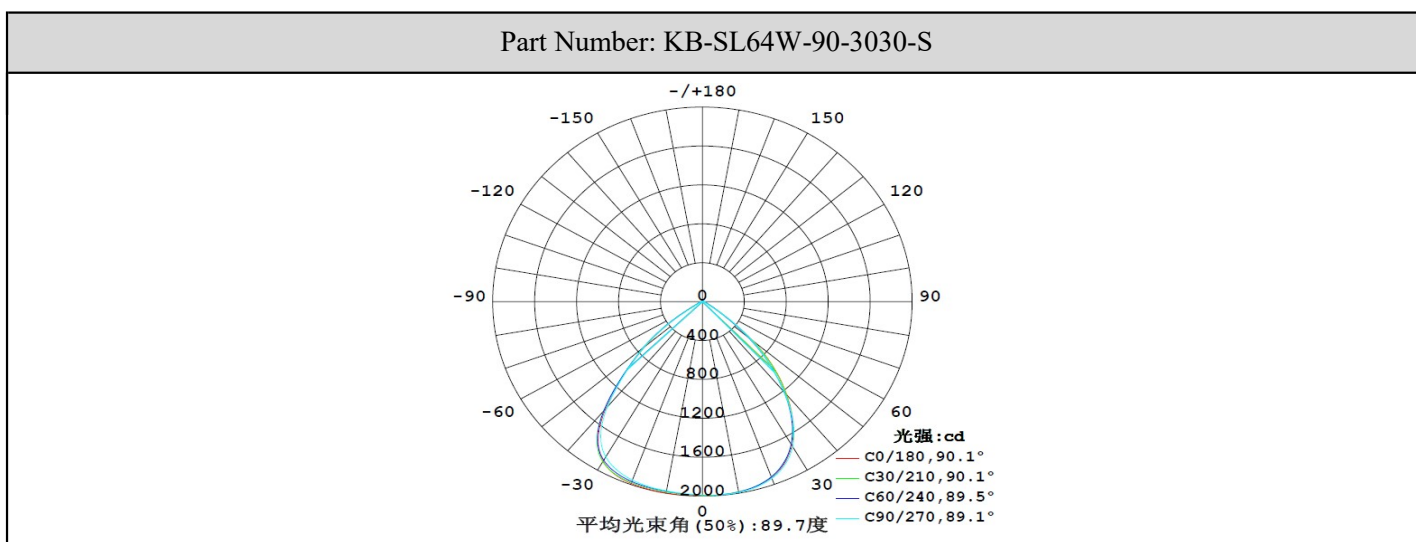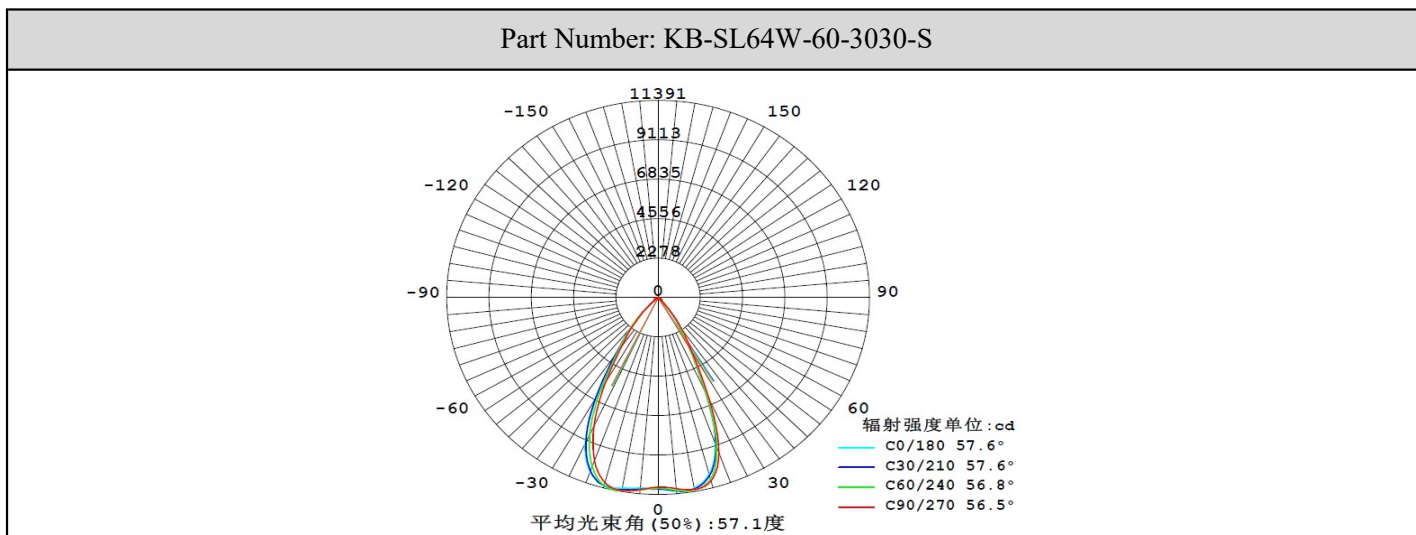

Mechanical Characteristics (产品尺寸):

