



Product Parameters (产品描述)

产品品名 Product Name:	LED LENS	安装方式 Fastening:	Screw
出光角度 Beam Angle:	10/20/30/60/90/Asymmetric	防水圈 Silica seal:	available
产品材料 Material:	PC	透光率 Transmittance:	93%
工作温度 Work Temp:	<105℃	匹配LED Match Led:	SMD3030/3535/5050




Part Number	Match Led	LED QTY	Dimension	Beam Angle
KB-HB32W-10-XP	Cree XP/3535	32pcs	L286*W96MM	~10°
KB-HB46W-20-5050	SMD5050	46pcs	L286*W96MM	~20°
KB-HB112W-30-3030	SMD3030/2835	112pcs	L286*W96MM	~30°
KB-HB112W-60-3030	SMD3030/2835	112pcs	L286*W96MM	~60°
KB-HB112W-90-3030	SMD3030/2835	112pcs	L286*W96MM	~90°
KB-SL112W-30*70-3030	SMD3030/2835	112pcs	L286*W96MM	~30*70°
KB-SL112W-60*90-3030	SMD3030/2835	112pcs	L286*W96MM	~60*90°
KB-SL112W-40*130-3030	SMD3030/2835	112pcs	L286*W96MM	~40*130°

Direction for Use




(透镜 | LENS)

- 1, Please use some soft paper or pure water to clean lens (reflector)
- 2, Don't use any industrial solvent to clean lens surface , such as alcohol
- 3, Storage environment : Temperature 0~40℃ , Humidity 30%~95%
- 4, This kind of lens can make the lighting more concentrated, and it's made from transparent material , so please do not open the packages until you use them, in case of the dust and other pollutions.



Light Distribution Curve (配光曲线图):

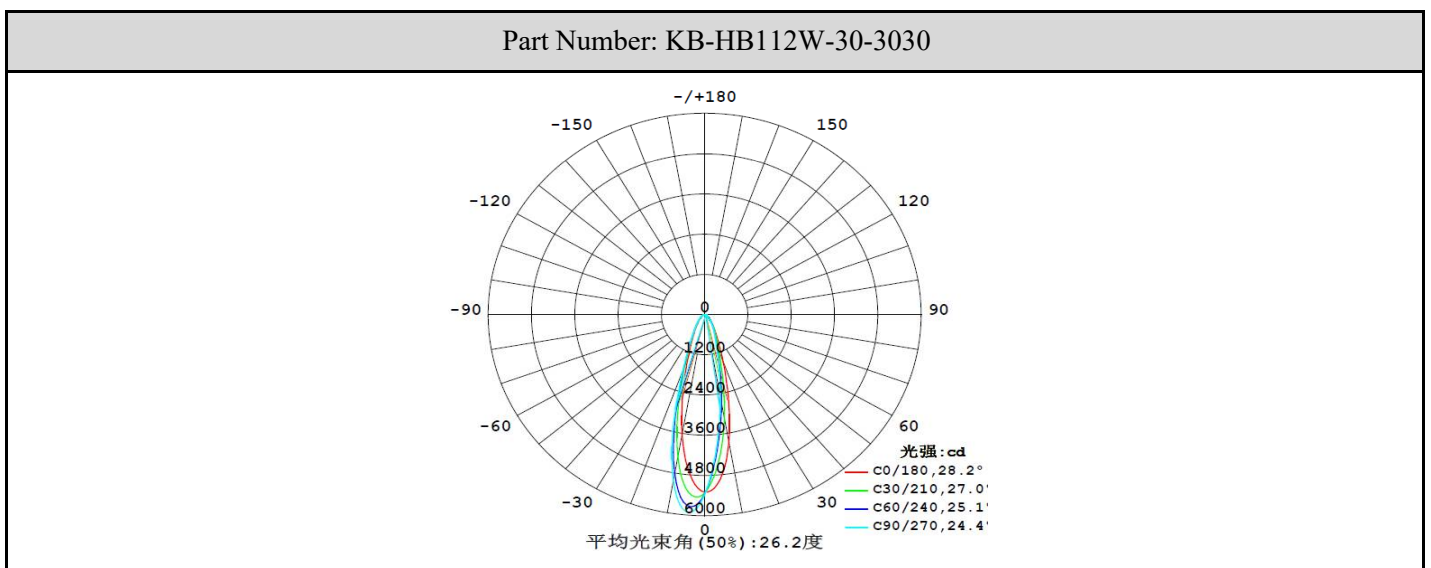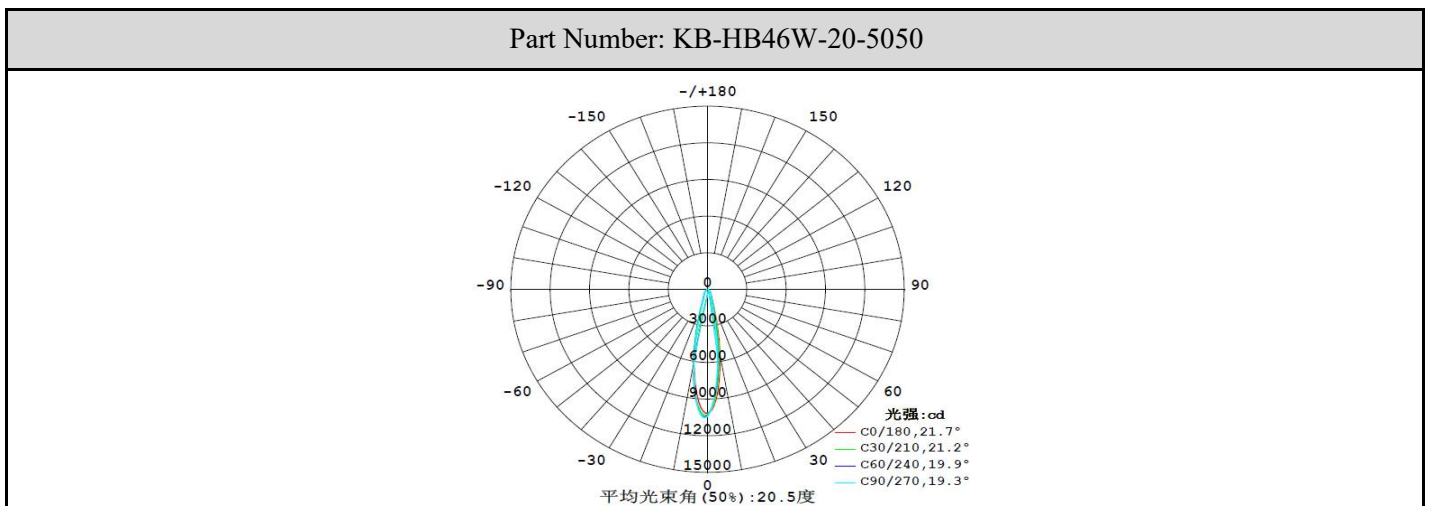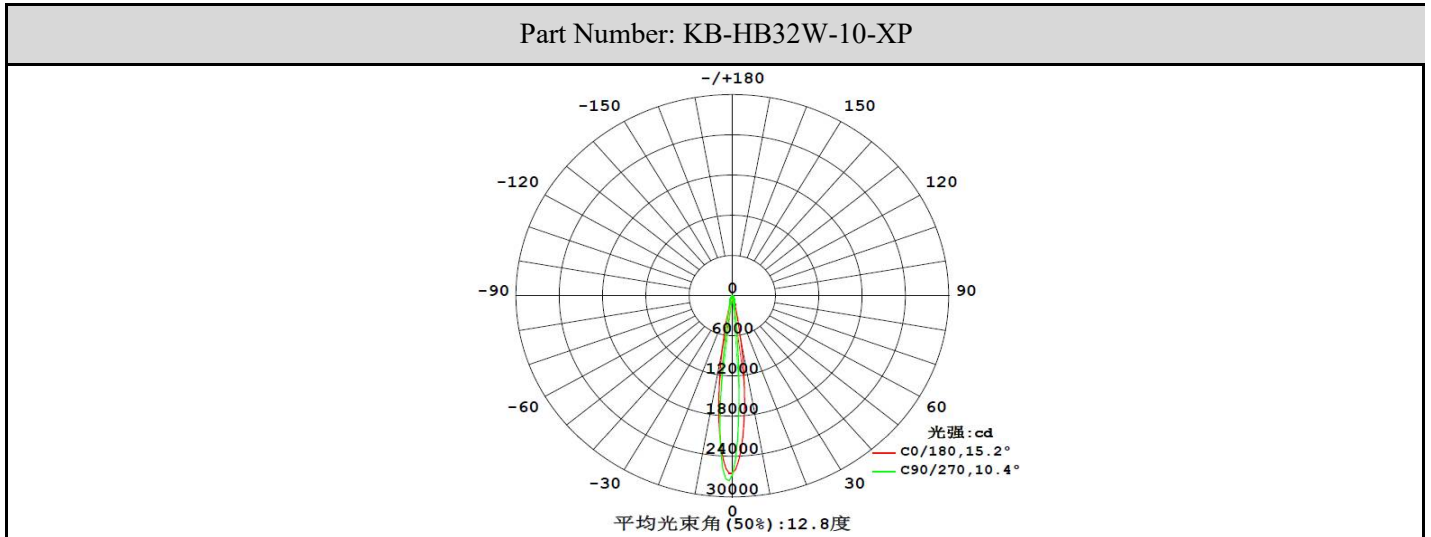

Light Distribution Curve (配光曲线图):

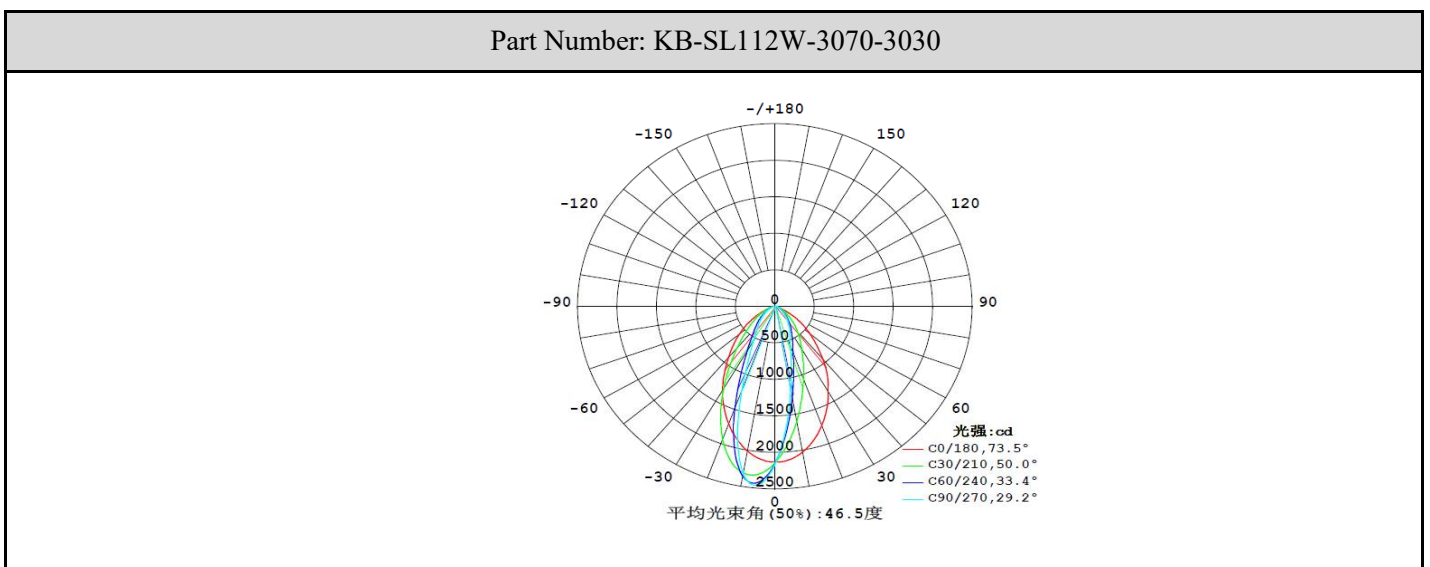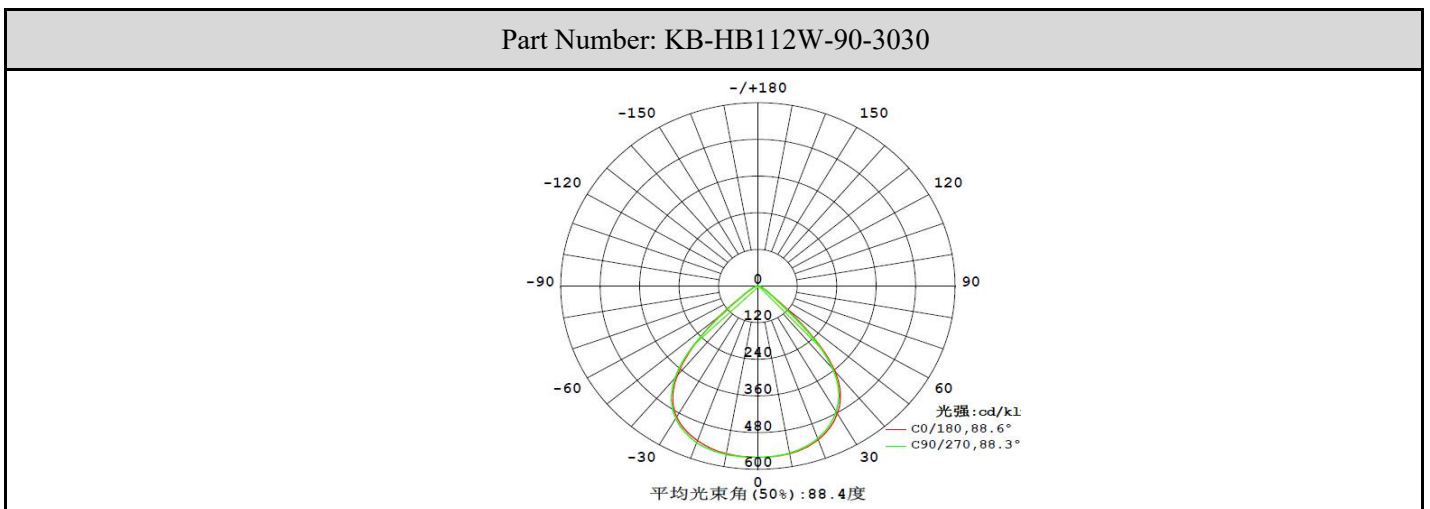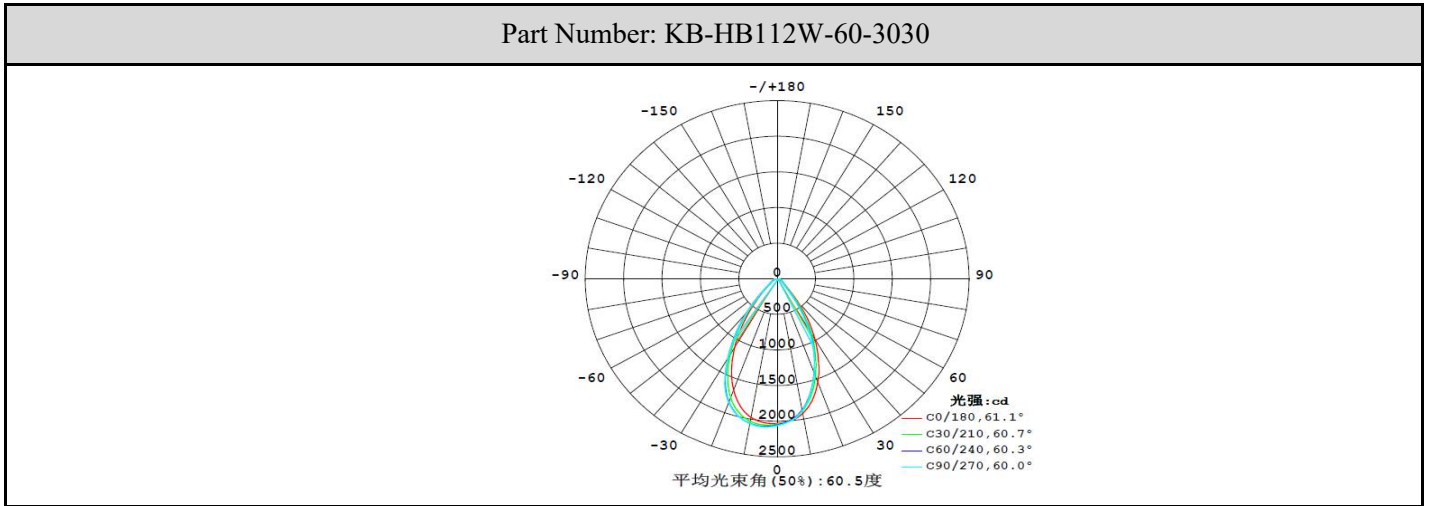


Light Distribution Curve (配光曲线图):

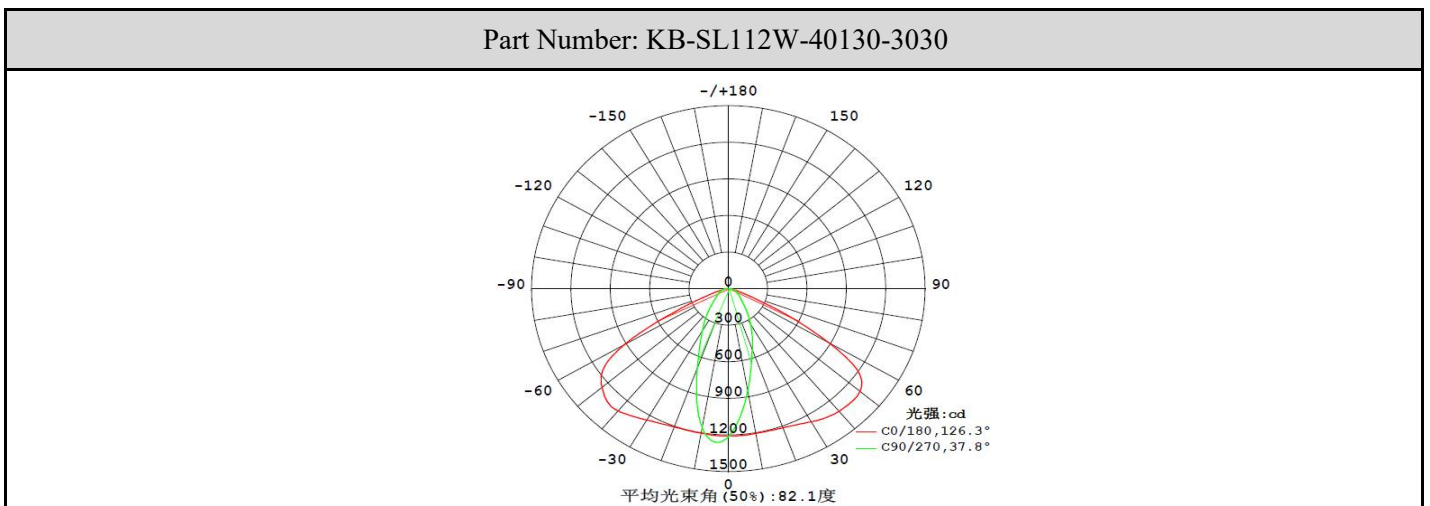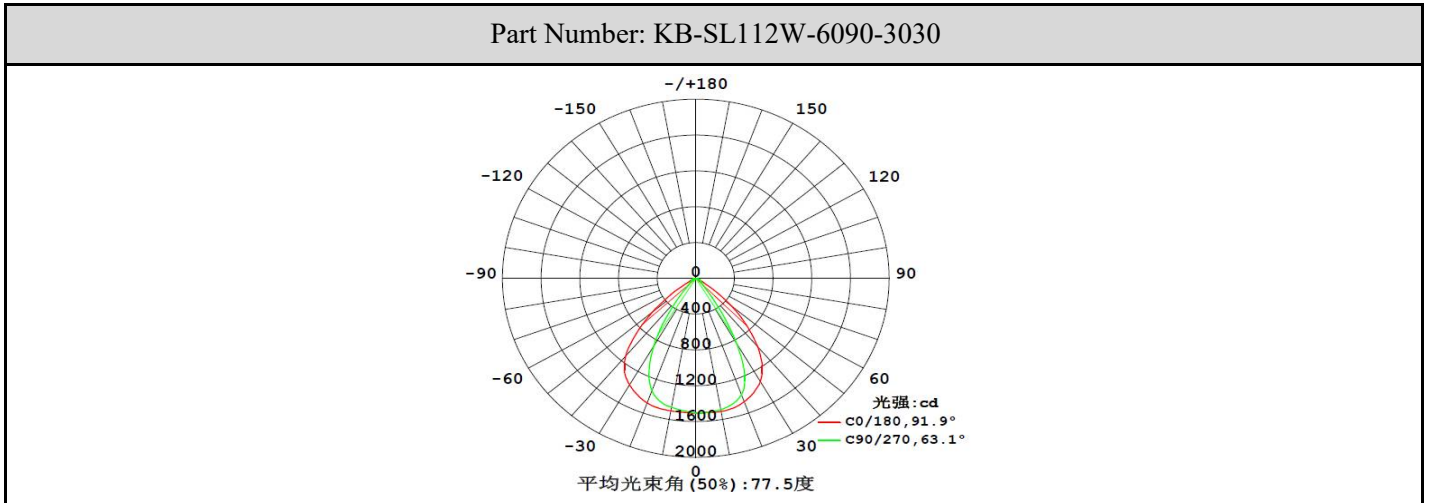


Mechanical Characteristics (产品尺寸):

(KB-HB32W-10-XP)

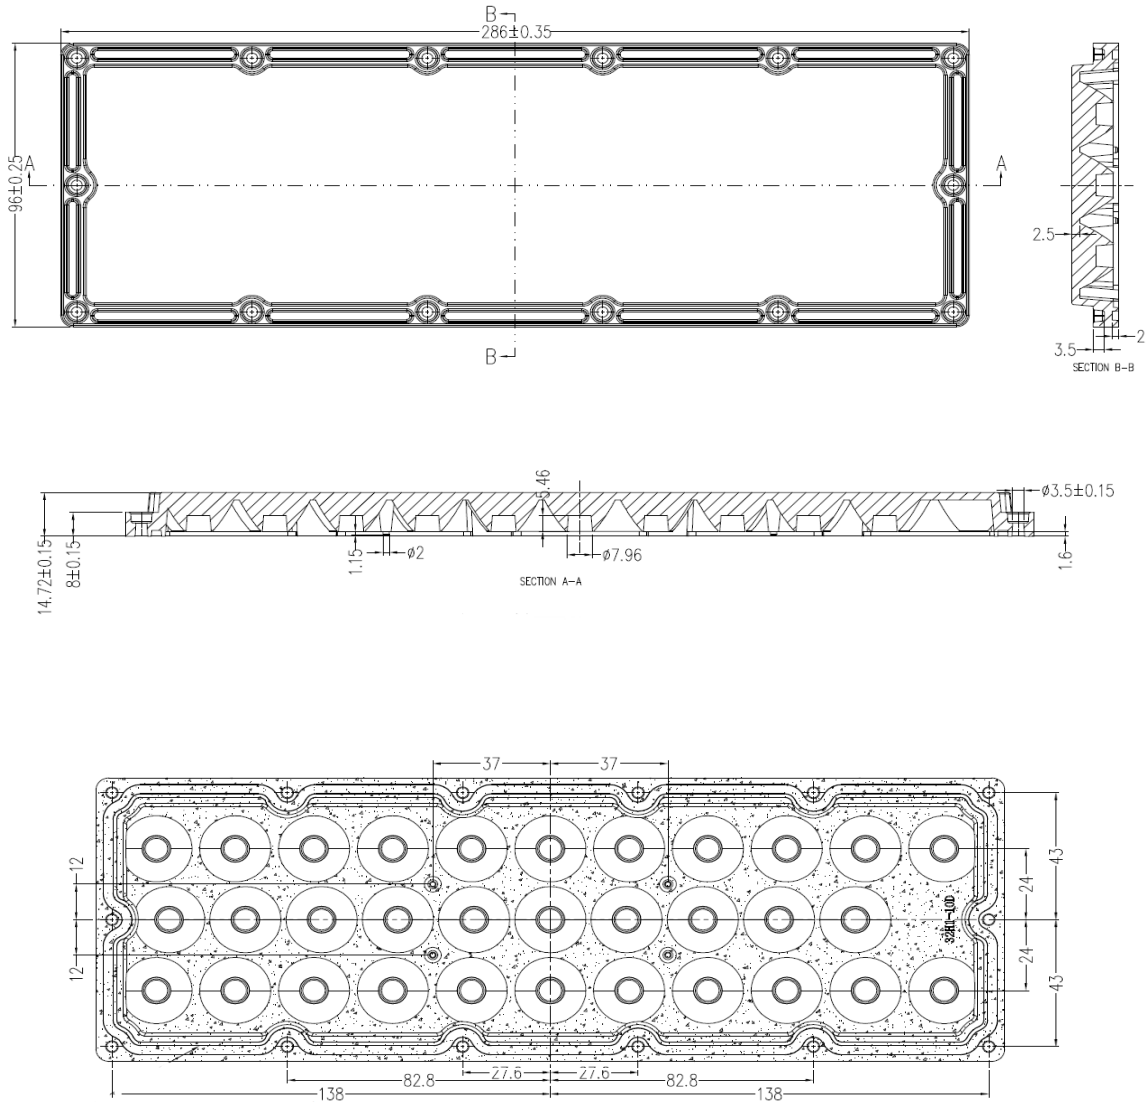

Mechanical Characteristics (产品尺寸):

(KB-HB46W-20-5050)

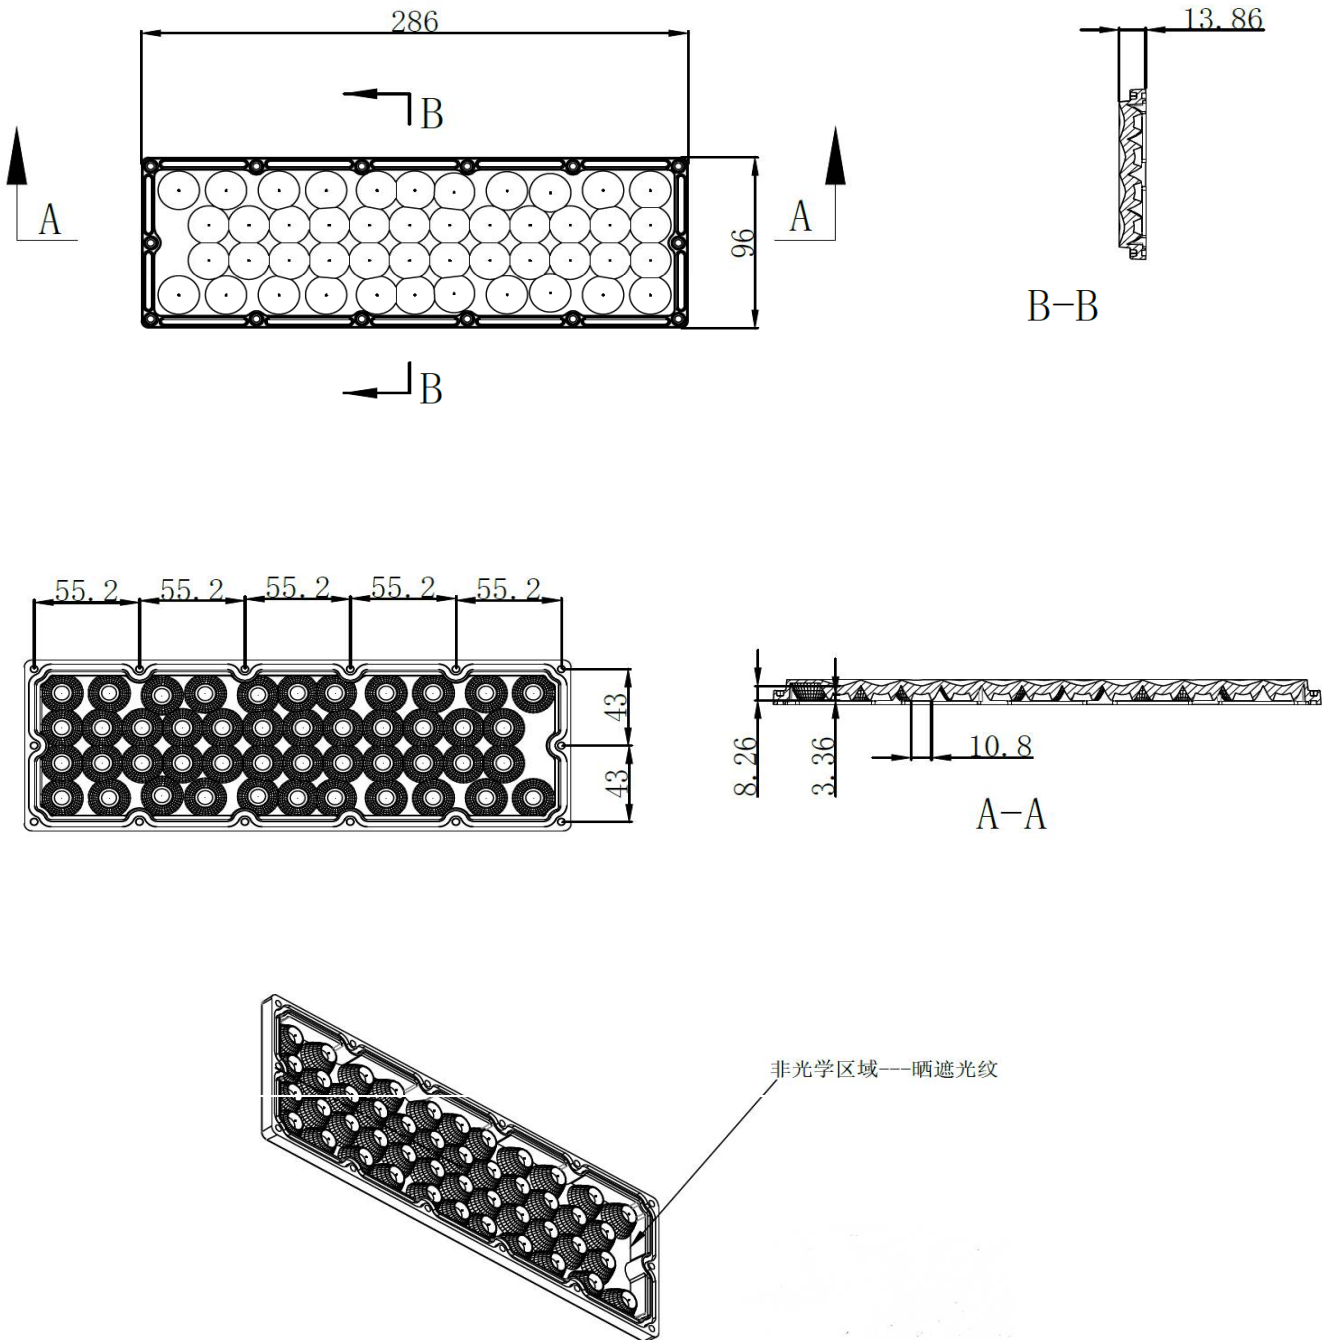

Mechanical Characteristics (产品尺寸):

(KB-HB/SL112W-xx-3030)

