







Product Parameters (产品描述)

产品编号 | Part Number: KB-HB/SL16W-xx-3030
出光角度 | Beam Angle: 15/25/40/60/90/ASY°
产品材料 | Material: PC
工作温度 | Work Temperature: <110°C





安装方式 | Fastening: Screws
支架颜色 | Holder Color: N/A
透光率 | Transmittance: 93%
匹配LED | Match Led: SMD3030/2835

Part Number	Dimension	Beam Angle
KB-HB16W-15-3030	L49.5*W49.5mm	~15°
KB-HB16W-25-3030	L49.5*W49.5mm	~25°
KB-HB16W-40-3030	L49.5*W49.5mm	~40°
KB-HB16W-60-3030	L49.5*W49.5mm	~60°
KB-HB16W-90-3030	L49.5*W49.5mm	~90°
KB-SL16W-PX-3030	L49.5*W49.5mm	~45° Polarized
KB-SL16W-TP1-3030	L49.5*W49.5mm	Type I
KB-SL16W-TP2-3030	L49.5*W49.5mm	Type II
KB-SL16W-TP3-3030	L49.5*W49.5mm	Type III
KB-SL16W-TP4-3030	L49.5*W49.5mm	Type IV
KB-SL16W-TP5-3030	L49.5*W49.5mm	~130°
KB-SL16W-90*120-3030	L49.5*W49.5mm	~90*120°
KB-SL16W-40*110-3030	L49.5*W49.5mm	~40*110°
KB-SL16W-100*160-3030	L49.5*W49.5mm	~100*160°





Light Distribution Curve (配光曲线图):

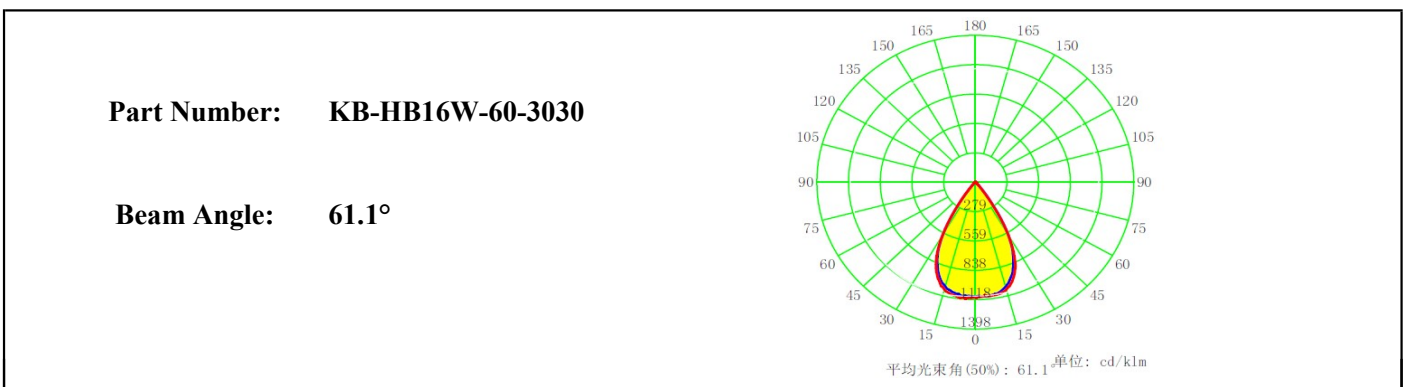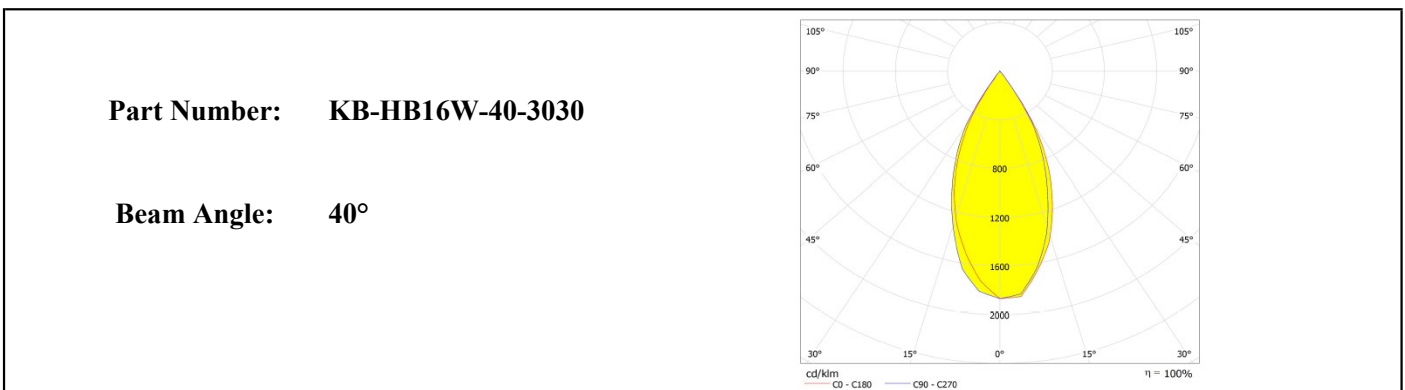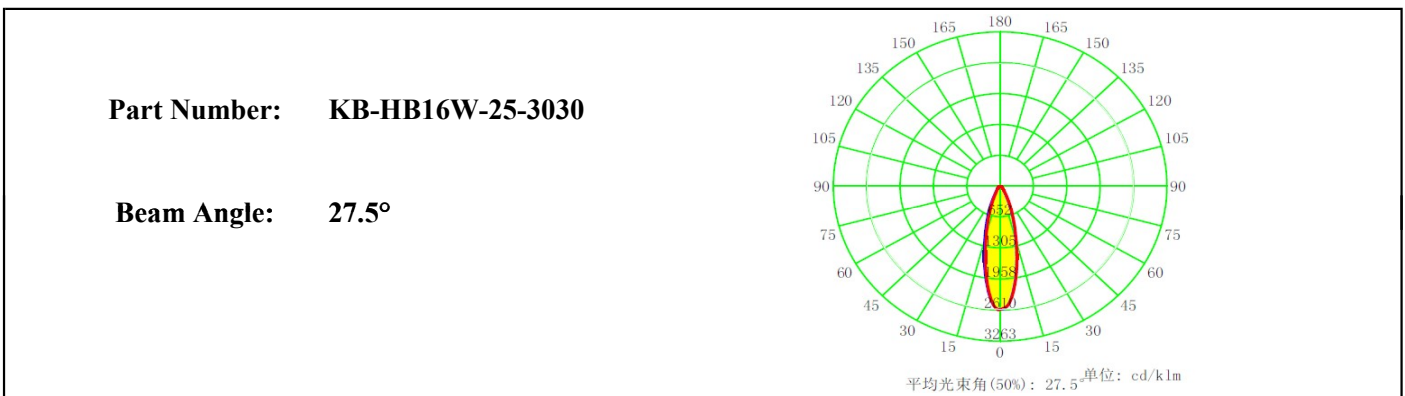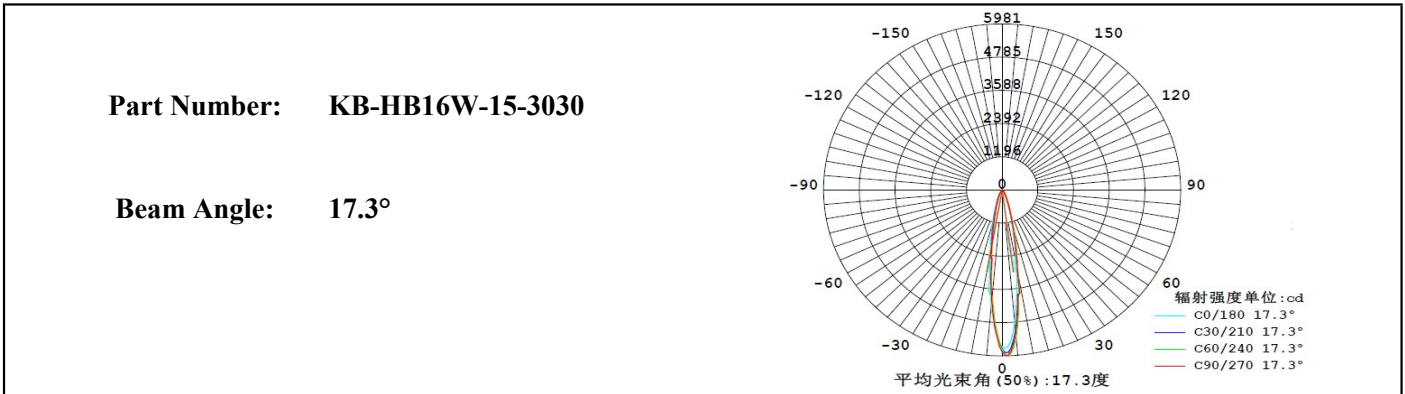

Light Distribution Curve (配光曲线图):

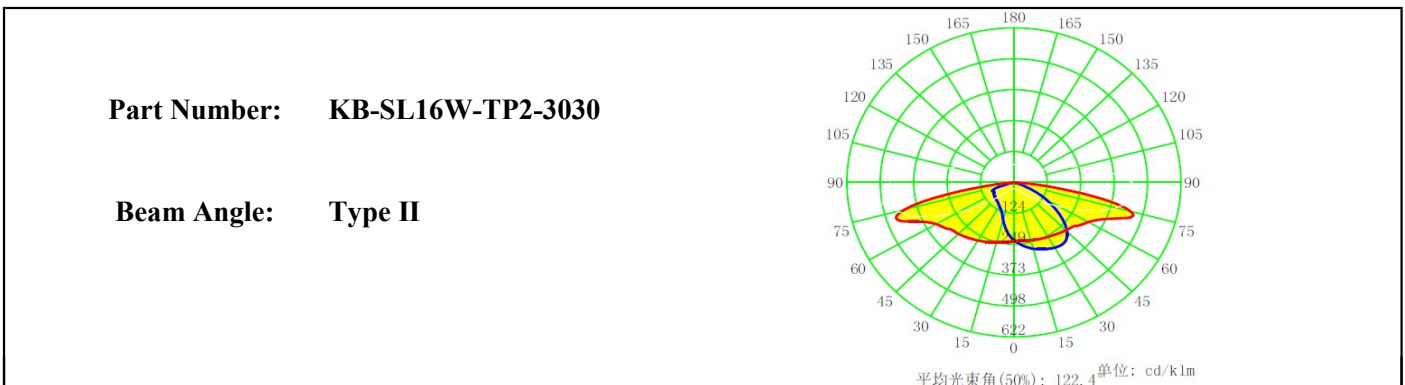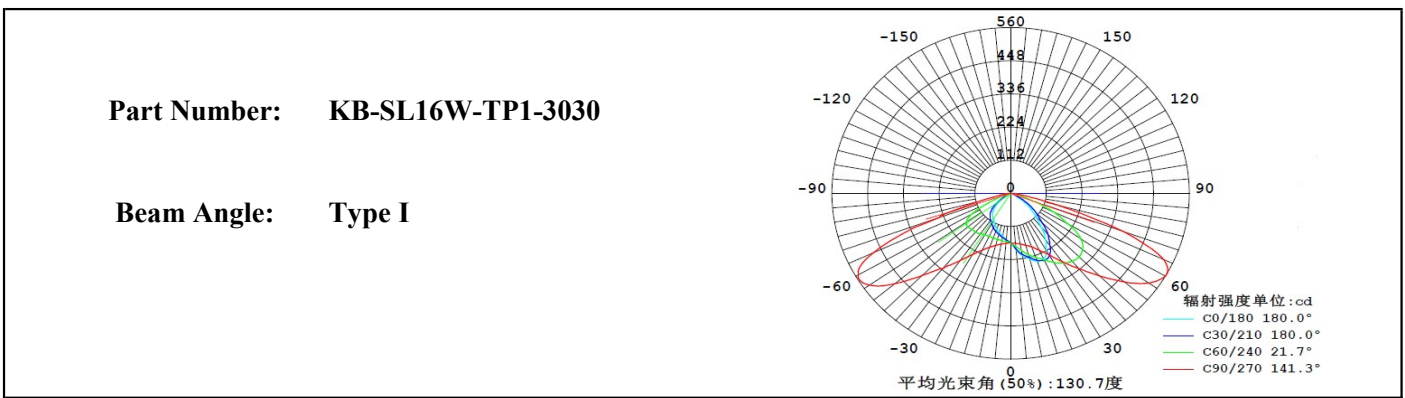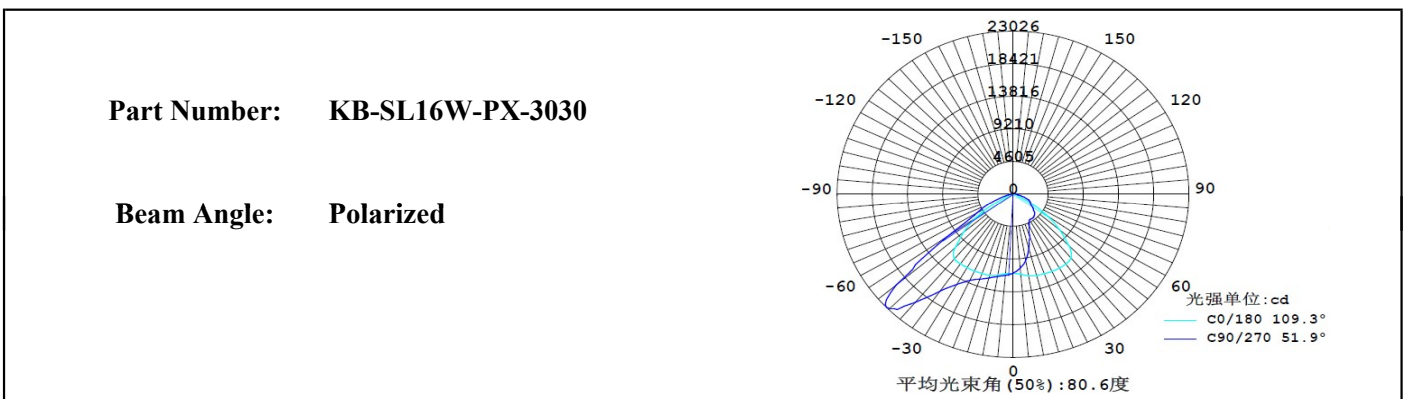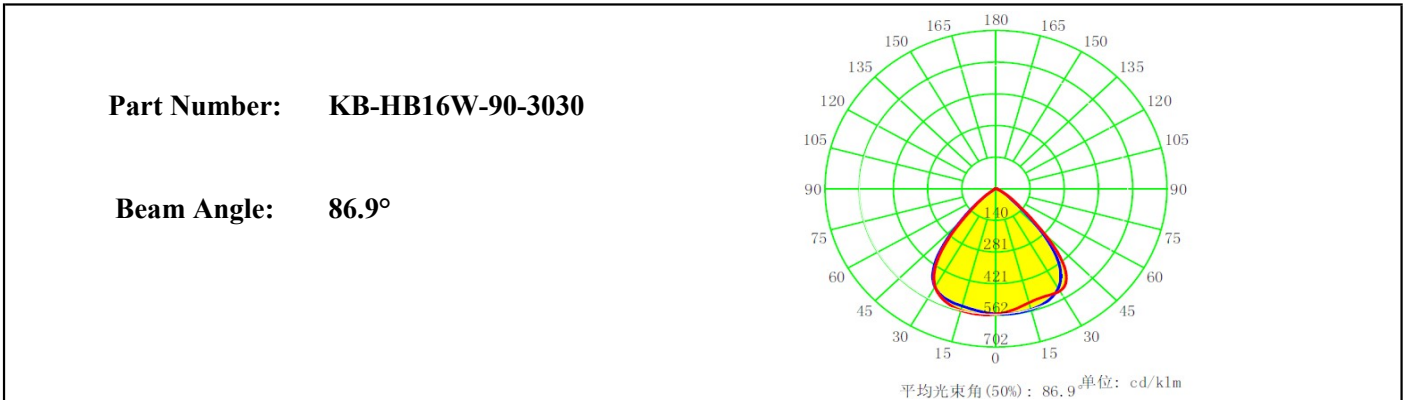


Light Distribution Curve (配光曲线图):

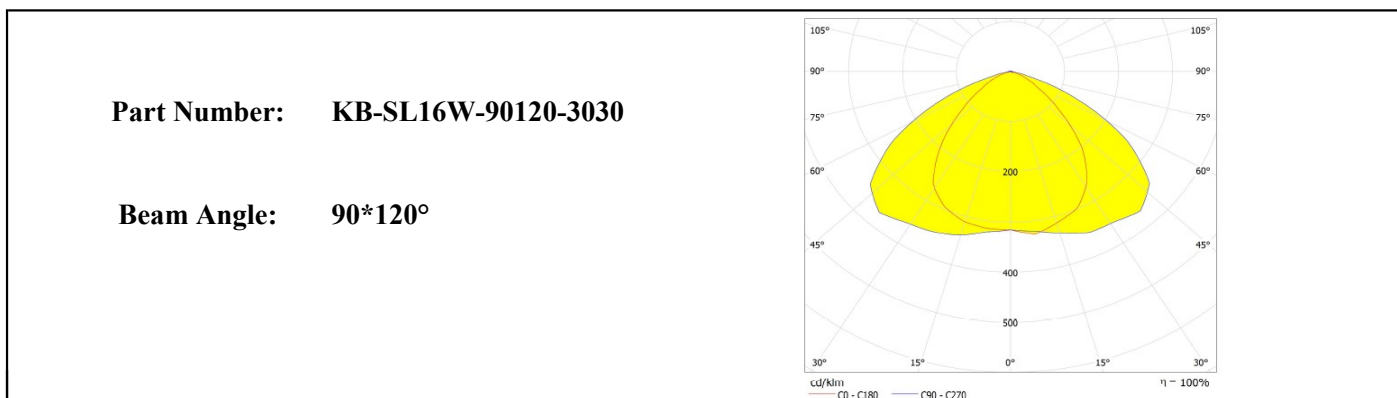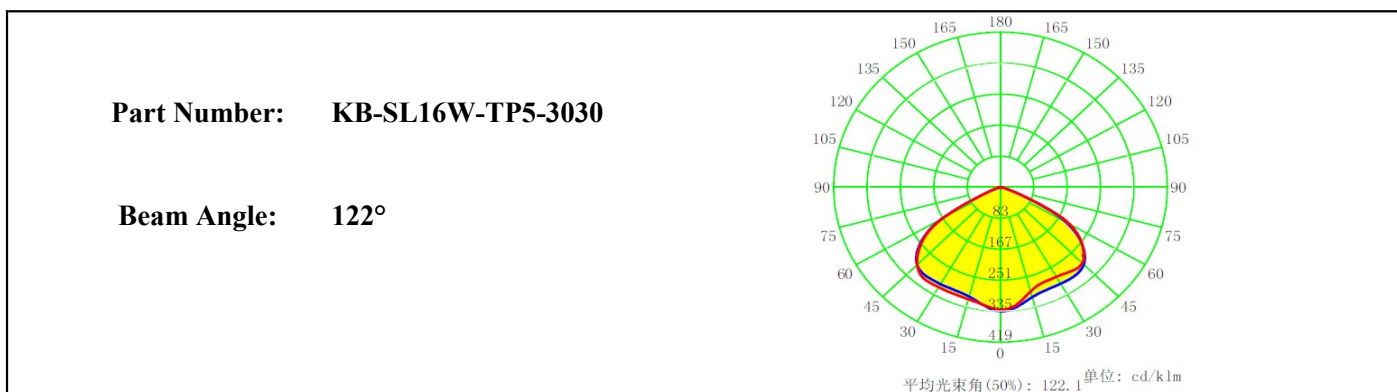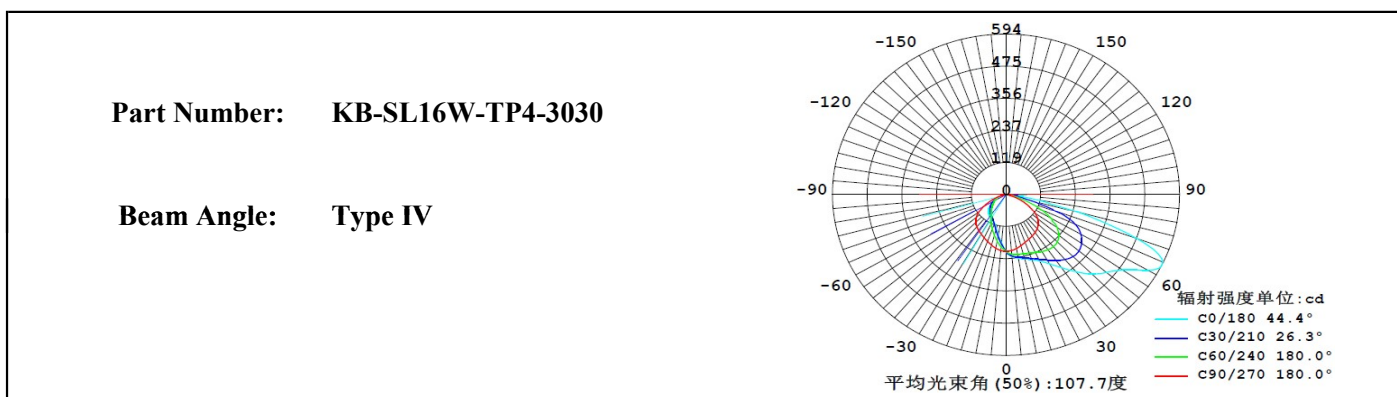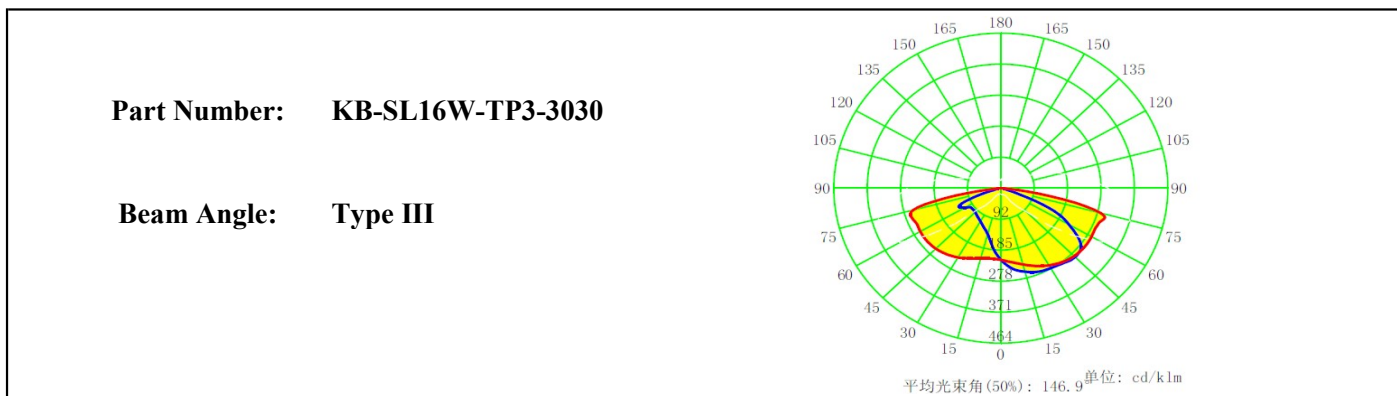

Light Distribution Curve (配光曲线图):

Part Number: KB-SL16W-40110-3030


Beam Angle: 40*110°

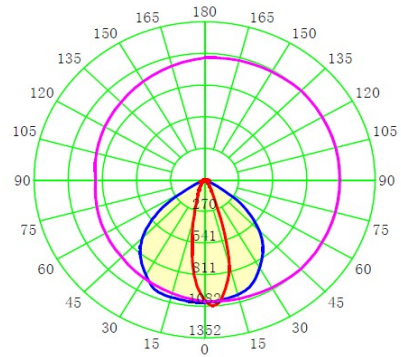

平均光束角(50%): 64.8° 单位: cd/k1m

Part Number: KB-SL16W-100160-3030

Beam Angle: 100*160°

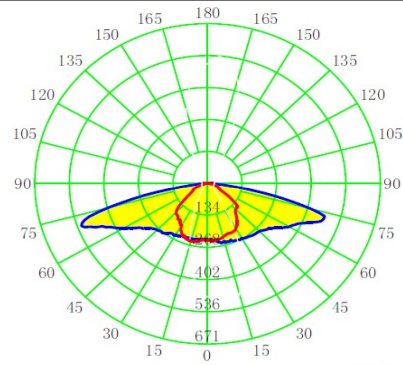

平均光束角(50%): 130.6° 单位: cd/k1m

Mechanical Drawing (产品尺寸):

