



Product Parameters (产品描述)

产品名称 | Product Name: LED LENS
 出光角度 | Beam Angle: 60/90/120/90*110/80*140°
 产品材料 | Material: PC
 工作温度 | Work Temp: <105°C

安装方式 | Fastening: Screw
 防水圈 | Silica seal : available
 透光率 | Transmittance: 93%
 匹配LED | Match Led: SMD3030/2835 Leds




Part Number	Match Led	LED QTY	Dimension	Beam Angle
KB-HB56W-60-25074-3030	SMD3030/2835	56pcs	L250*W74mm	~60°
KB-HB56W-90-25074-3030	SMD3030/2835	56pcs	L250*W74mm	~90°
KB-HB56W-120-25074-3030	SMD3030/2835	56pcs	L250*W74mm	~120°
KB-HB56W-90110-25074-3030	SMD3030/2835	56pcs	L250*W74mm	~90*110°
KB-SL56W-80x140-25074-3030	SMD3030/2835	56pcs	L250*W74mm	~80*140°

Direction for Use



(透镜 | LENS)

- 1, Please use some soft paper or pure water to clean lens (reflector)
- 2, Don't use any industrial solvent to clean lens surface , such as alcohol
- 3, Storage environment : Temperature 0~40°C , Humidity 30%~95%
- 4, This kind of lens can make the lighting more concentrated, and it's made from transparent material , so please do not open the packages until you use them, in case of the dust and other pollutions.

Light Distribution Curve (配光曲线图):

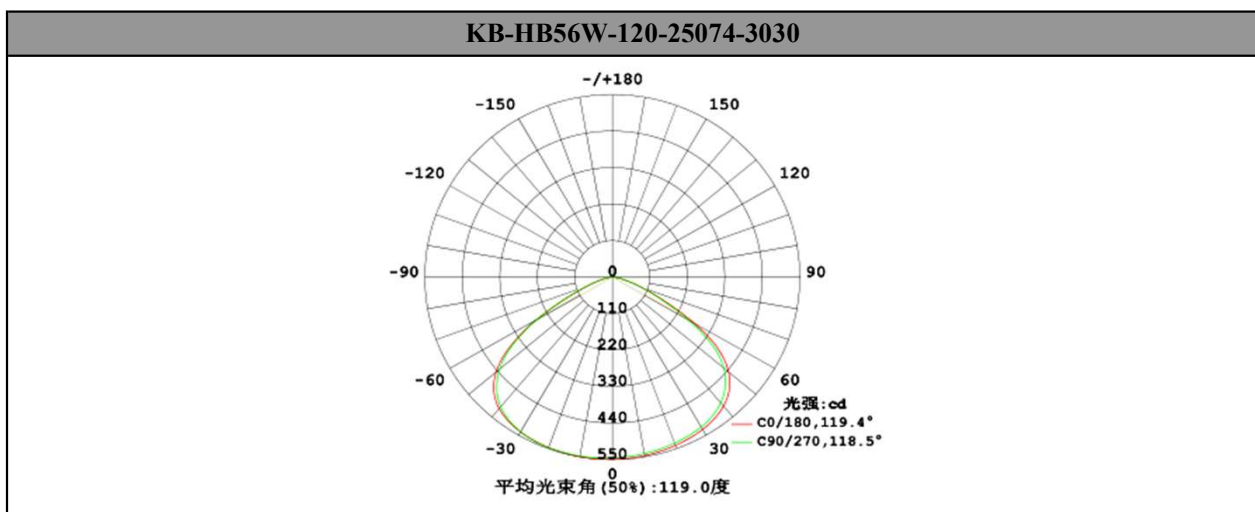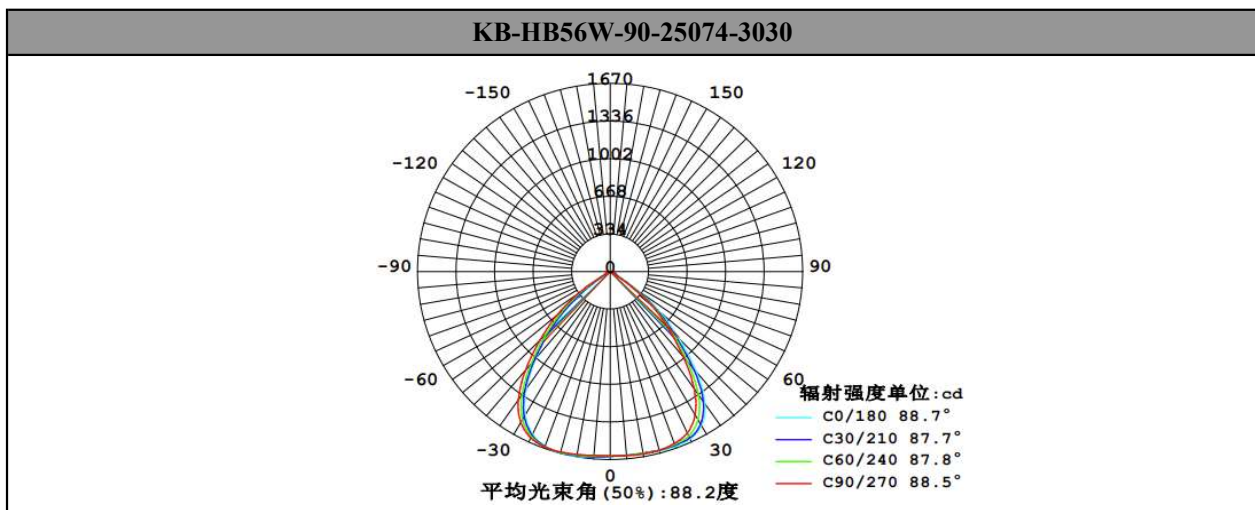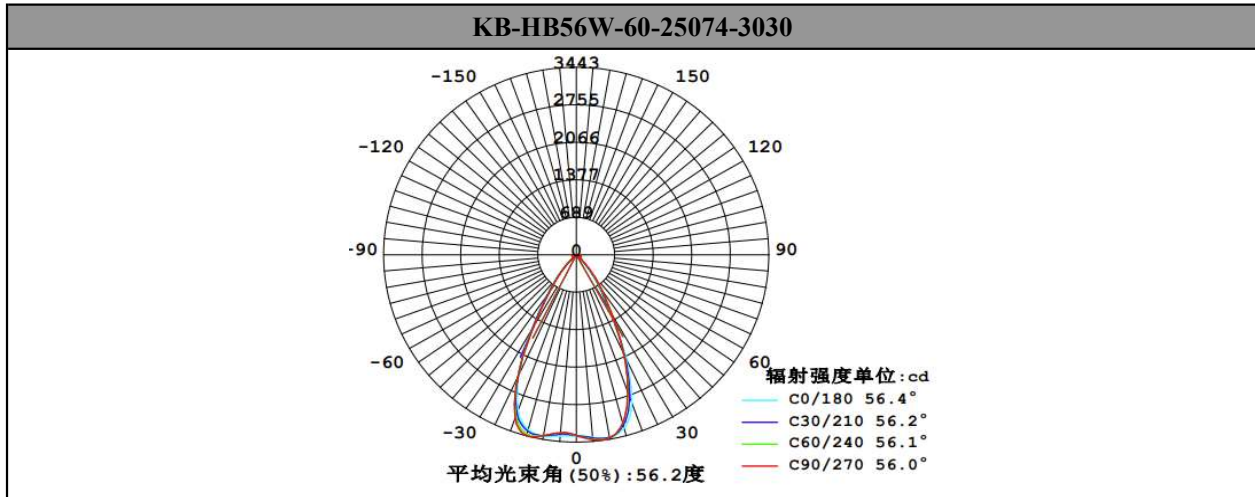

Light Distribution Curve (配光曲线图):

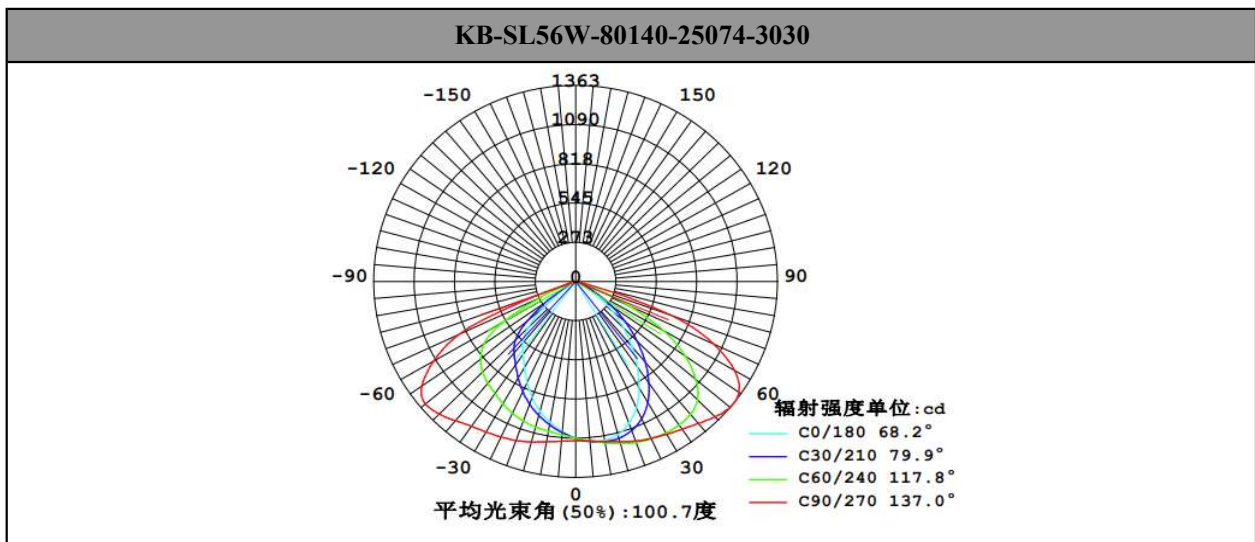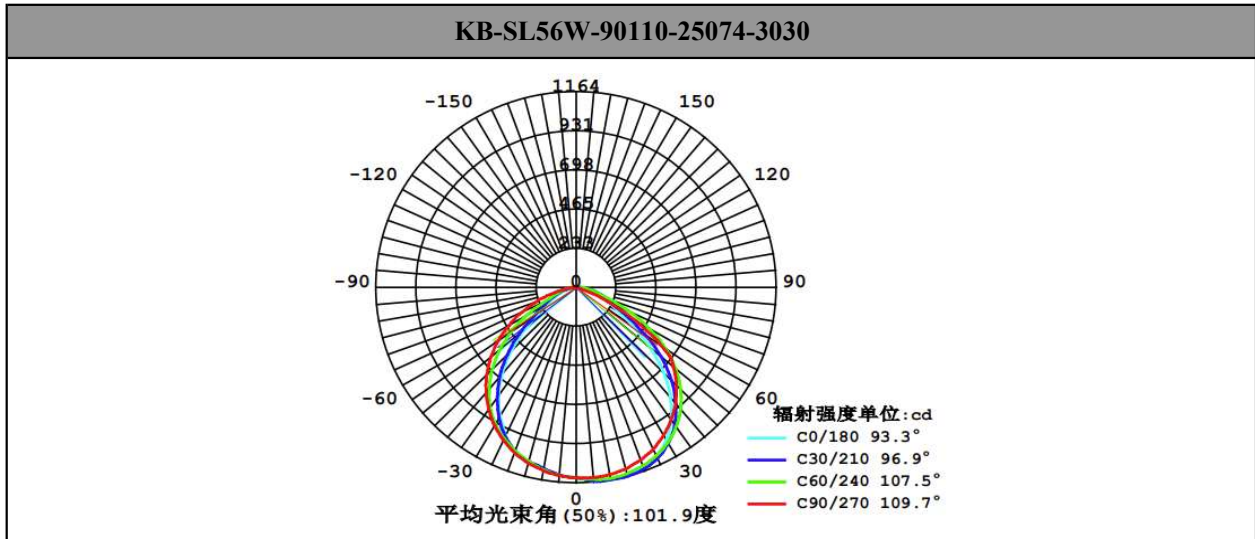

Mechanical Characteristics (产品尺寸):

