KingBrite®
金澜信
Tel: +86-755-29064293 Fax: +86-755-23115496

KingBrite Optoelectronics

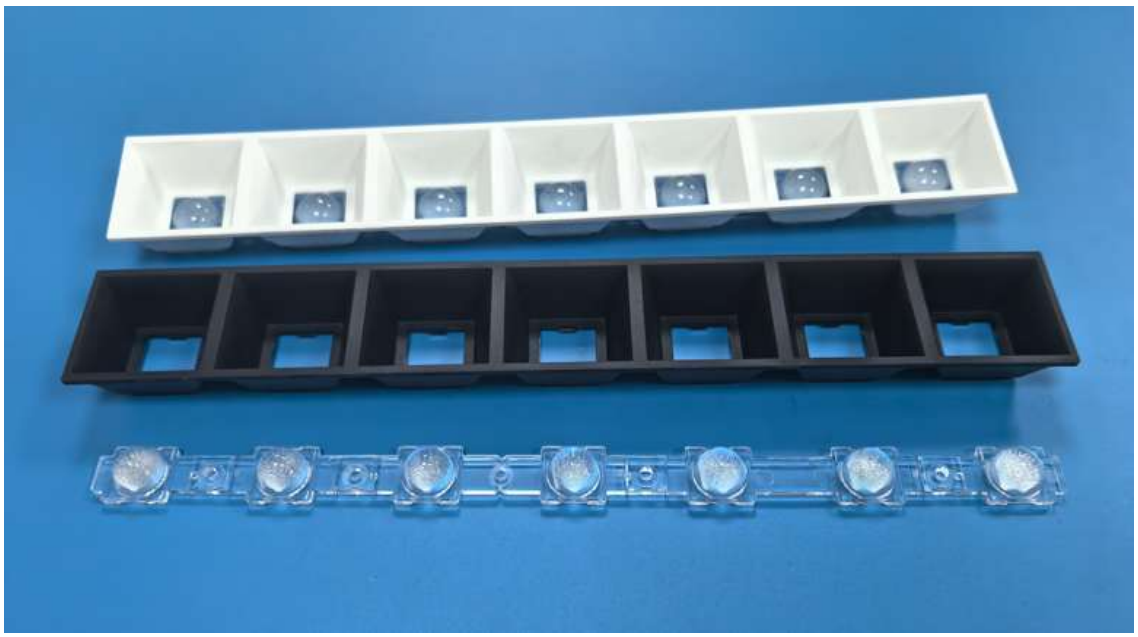

Product Parameters（产品描述）

产品编号丨Part Number:	KB-LN280-W40-xx-7X1	安装方式丨Fastening: Screw	
出光角度丨Beam Angle:	30/50/80/30*70°	配件组成丨Lens+Reflector	
产品材料丨Material:	PMMA+PC	透光率 丨Transmittance: 93%	
工作温度丨Work Temp:	＜85℃	匹配LED丨Match Led: SMD2835/3030/5050	

Part Number	Material	Dimension	Beam Angle
KB-LN280-W40-30-7X1	PMMA	L280*W40MM	~30°
KB-LN280-W40-50-7X1	PMMA	L280*W40MM	~50°
KB-LN280-W40-80-7X1	PMMA	L280*W40MM	~80°
KB-LN280-W40-3070-7X1	PMMA	L280*W40MM	~30*70°
KB-LN280-W40-REF-BM	PC	Reflector black matt finish	
KB-LN280-W40-REF-WM	PC	Reflector white matt finish	

Direction for Use

（透镜丨 LENS）

1, Please use some soft paper or pure water to clean lens (reflector)
2, Don't use any industrial solvent to clean lens surface , such as alcohol
3, Storage environment : Temperature 0~40℃ , Humidity 30%~95%
4, This kind of lens can make the lighting more concentrated, and it's made from transparent material , so please do not open the packages until you use them, in case of the dust and other pollutions.

Address: 3F, 1st Bldg, Chengqiu Industrial Estate, Guanlan, Longhua District, Shenzhen, 518109, China ;
Tel : 86-755-29064293 Fax : 86-755-23115496 Email : sales@kingbrite.cn Website : www.kingbrite.cn

KingBrite®
金澜信
Tel: +86-755-29064293 Fax: +86-755-33079169

KingBrite Optoelectronics

Mechanical Characteristics (产品尺寸):

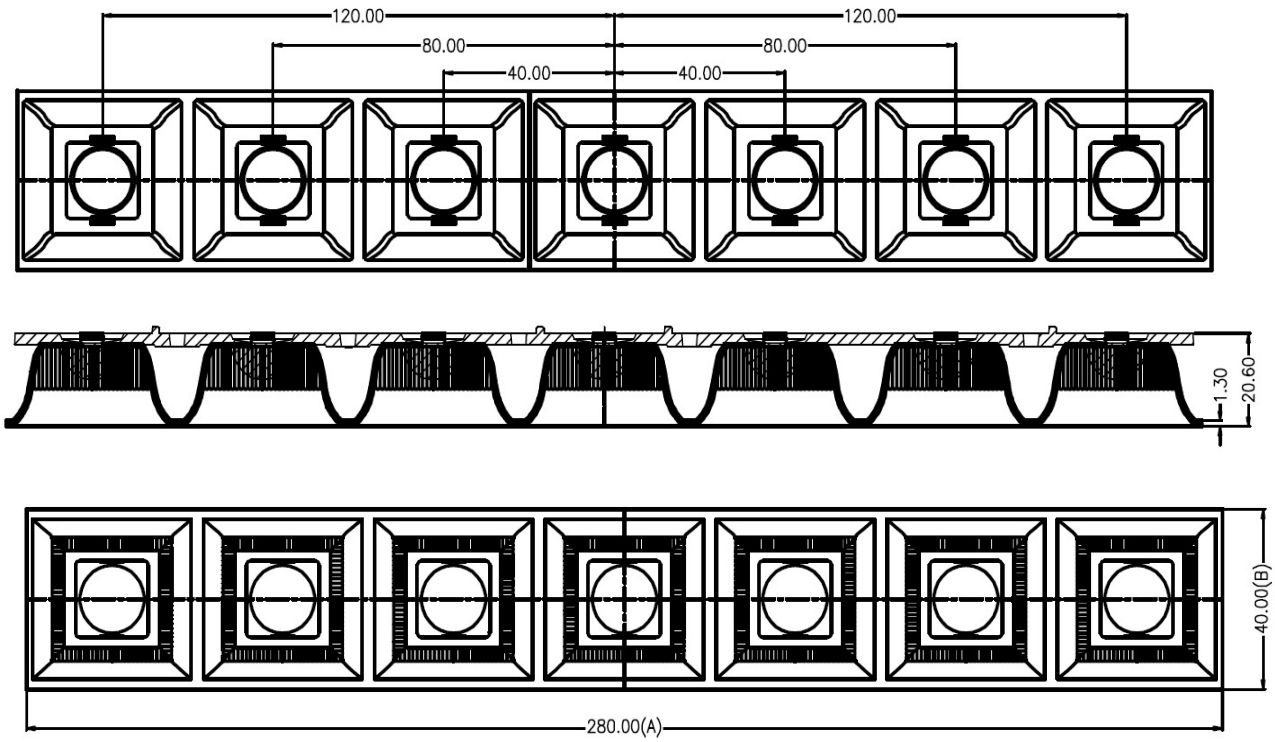

Product Package (产品包装):

 KB-LN280-W40-50-7X1 KB-LN280-W40-80-7X1	 KB-LN280-W40-REF-xx
200pcs/box, 3.2kg/box 4boxes/800pcs/carton Gross weight: 13.5kg/carton Dimension: 40*33*35cm	360pcs/carton Gross weight: 10.4kg/carton Dimension: 43*34*29cm

Address: 3F, 1st Bldg, Chengqiu Industrial Estate, Guanlan, Longhua District, Shenzhen, 518109, China ;
Tel : 86-755-29064293 Fax : 86-755-23115496 Email : sales@kingbrite.cn Website : www.kingbrite.cn