



Product Parameters (产品描述)

产品编号 | Part Number: KB-H20-xx-3030

出光角度 | Beam Angle: 7/12/20/30/45/60/15*30/20*50°

产品材料 | Material: PMMA

工作温度 | Work Temp: <85°C

安装方式 | Fastening: Tape/Glue/Clips

支架颜色 | Holder Color: White/Black

透光率 | Transmittance: 93%

匹配LED | Match Led: Dome/Flat 3030/3535 Leds

Part Number	Lens Surface	Dimension	Beam Angle
KB-H20-7-XP	镜面/transparent	Φ19.8*H11.35/Φ21.74*H12.5mm	~7°
KB-H20-12P-3030	珠面/beads	Φ19.8*H11.35/Φ21.74*H12.5mm	~12°
KB-H20-20P-3030	珠面/beads	Φ19.8*H11.35/Φ21.74*H12.5mm	~20°
KB-H20-30P-3030	珠面/beads	Φ19.8*H11.35/Φ21.74*H12.5mm	~30°
KB-H20-45P-3030	珠面/beads	Φ19.8*H11.35/Φ21.74*H12.5mm	~45°
KB-H20-60P-3030	珠面/beads	Φ19.8*H11.35/Φ21.74*H12.5mm	~60°
KB-H20-2545PG-3030	珠面/beads	Φ19.8*H11.35/Φ21.74*H12.5mm	~25*45+20° Polarized
KB-H20-1530-3030	条纹面/strip	Φ19.8*H11.35/Φ21.74*H12.5mm	~15*30°
KB-H20-2050-3030	条纹面/strip	Φ19.8*H11.35/Φ21.74*H12.5mm	~20*50°


Direction for Use

(透镜 | LENS)




- 1, Please use some soft paper or pure water to clean lens (reflector)
- 2, Don't use any industrial solvent to clean lens surface , such as alcohol
- 3, Storage environment : Temperature 0~40°C , Humidity 30%~95%
- 4, This kind of lens can make the lighting more concentrated, and it's made from transparent material , so please do not open the packages until you use them, in case of the dust and other pollutions.

Light Distribution Curve (配光曲线图):




Part Number: KB-H20-7-XP

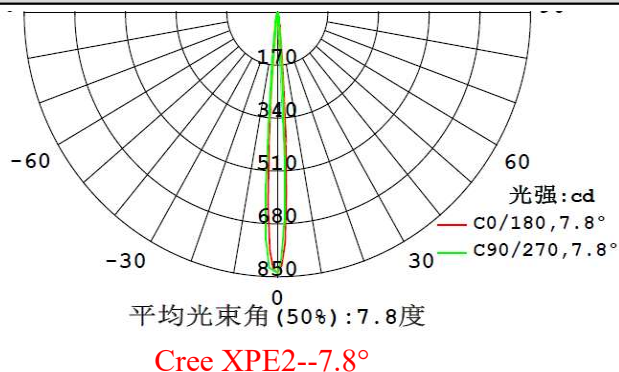

Part Number: KB-H20-12P-3030

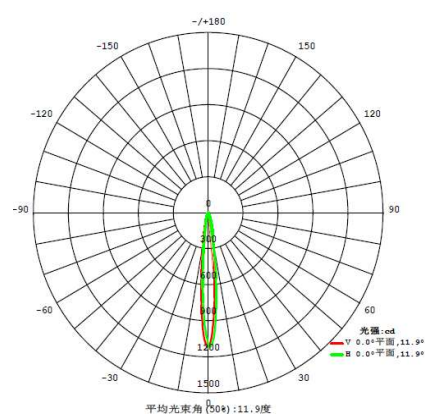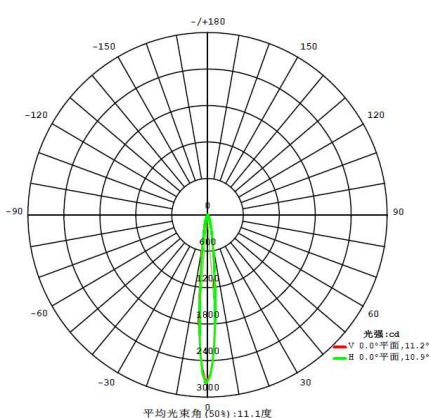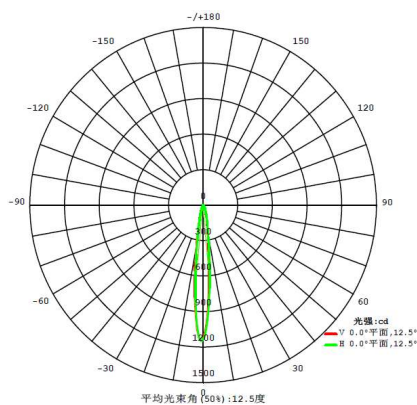


Part Number: KB-H20-20P-3030

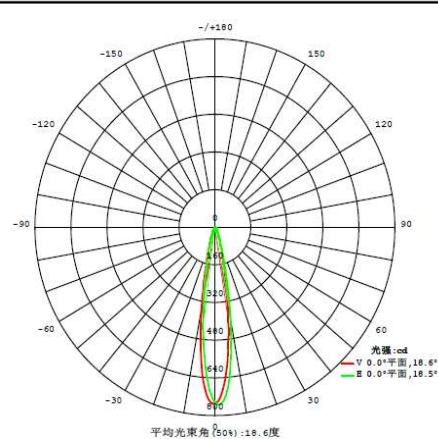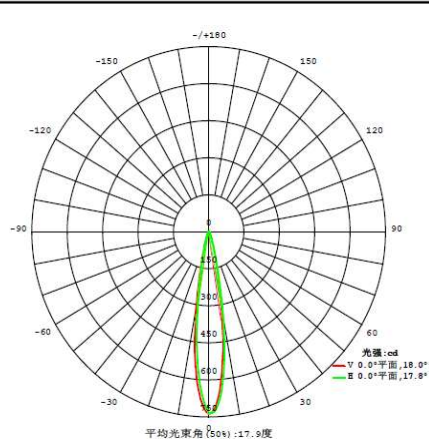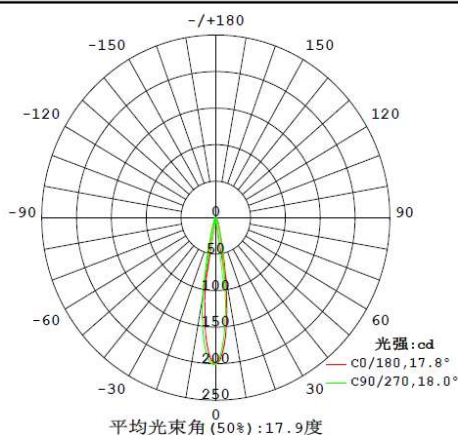


Light Distribution Curve (配光曲线图):


Part Number: KB-H20-30P-3030

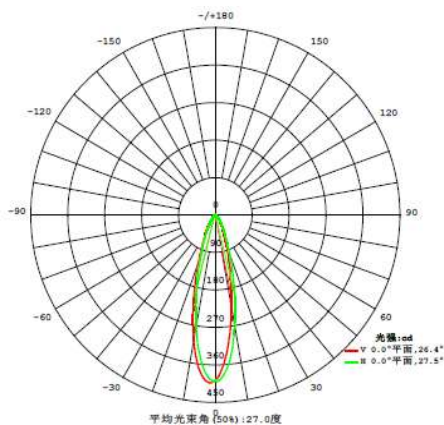

SMD3030---27°

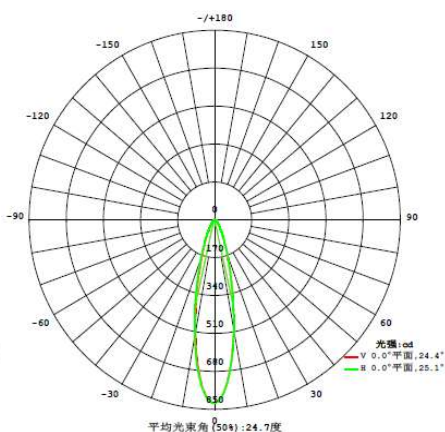


Osram P7---24.7°

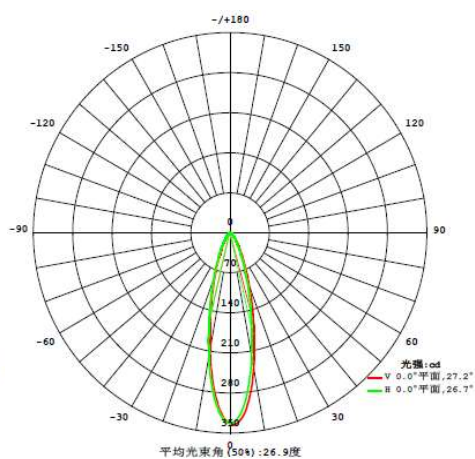


Cree XTE---26.9°


Part Number: KB-H20-45P-3030

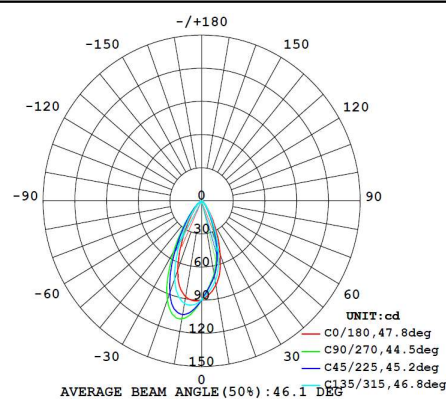

SMD3030---46.1°

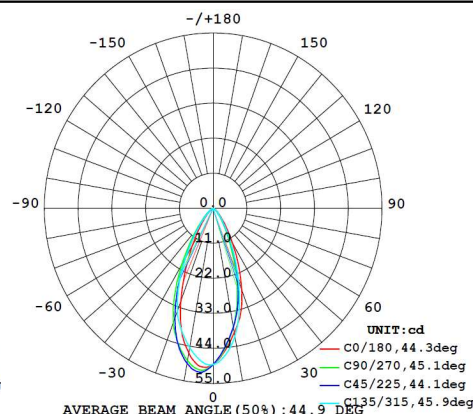


Osram P7---44.9°

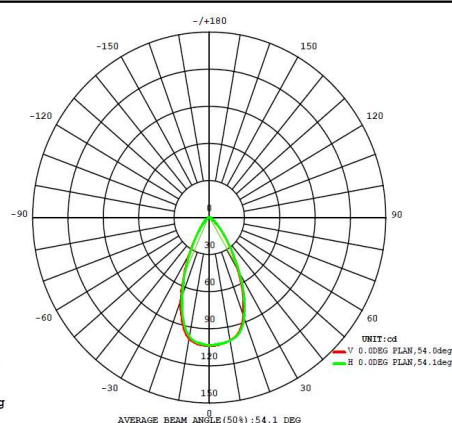


Cree XPG2---54.1°


Part Number: KB-H20-60P-3030

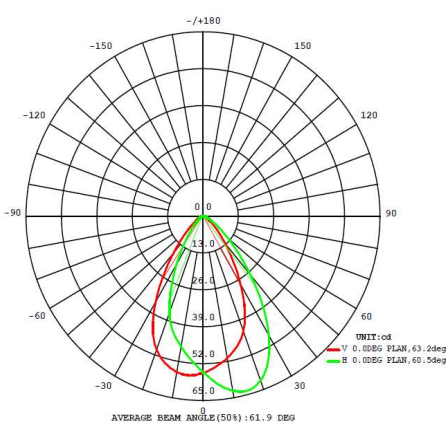

SMD3030---61.9°

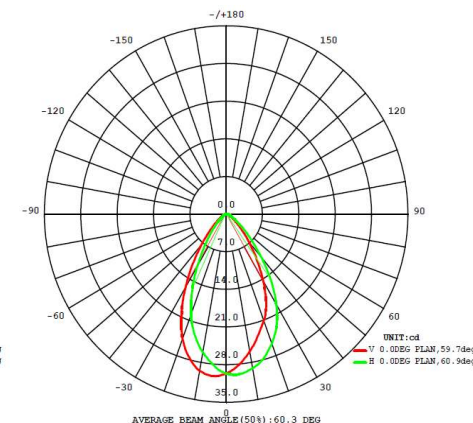


Osram P7---60.3°

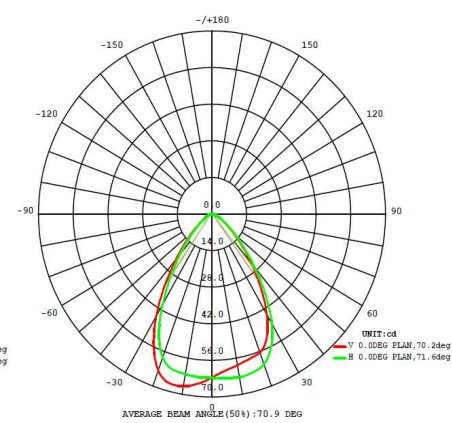


Cree XPG2---70.9°

Light Distribution Curve (配光曲线图):


Part Number: KB-H20-2545PG-3030

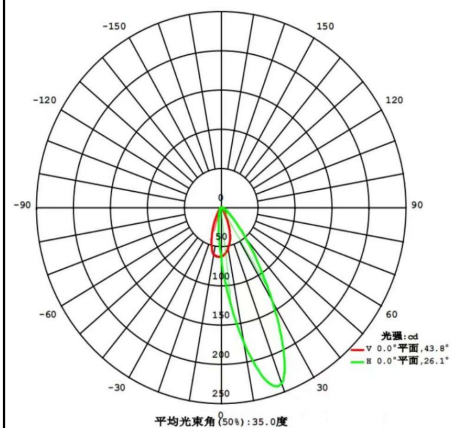

SMD3030---26.1*43.8°

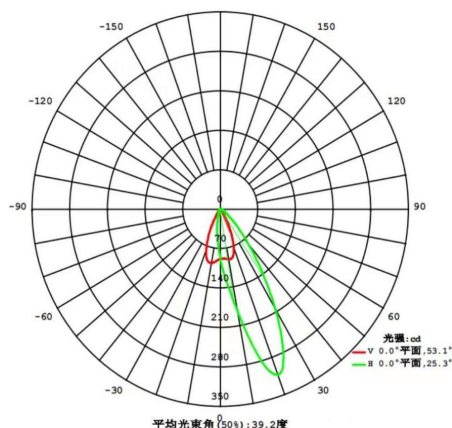


Cree XP-E2---25.3*53.1°

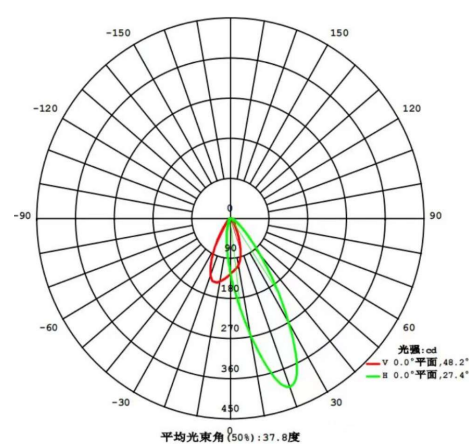


Cree XTE---27.4*48.2°


Part Number: KB-H20-1530-3030

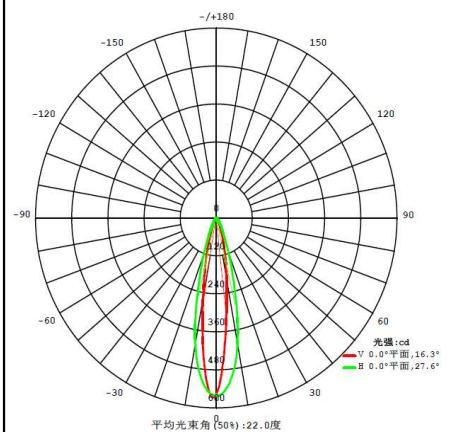

SMD3030---16.3*27.6°

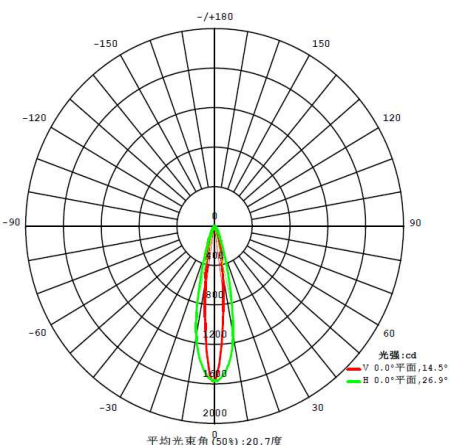


Osram P7---14.5*26.9°

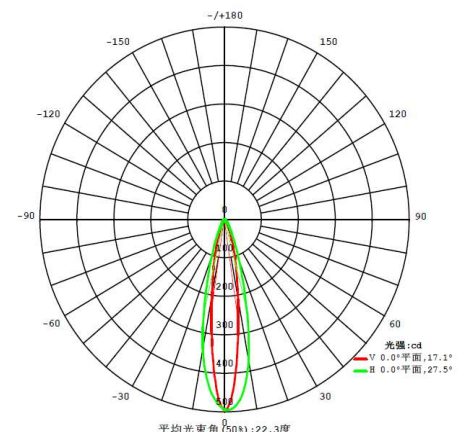


Cree XTE---17.1*27.5°


Part Number: KB-H20-2050-3030

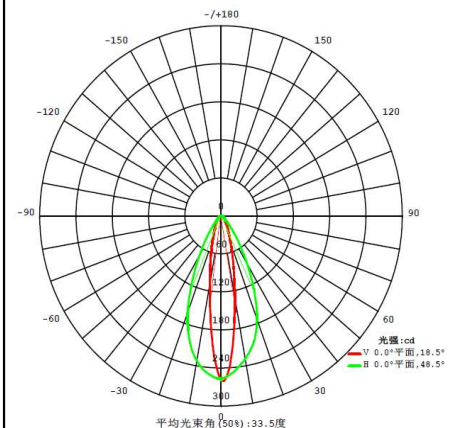

SMD3030---18.5*48.5°

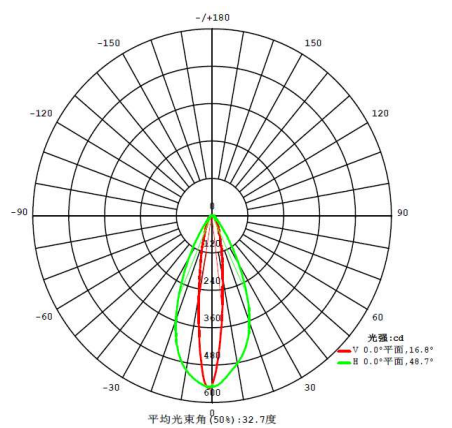


Osram P7---16.8*48.7°

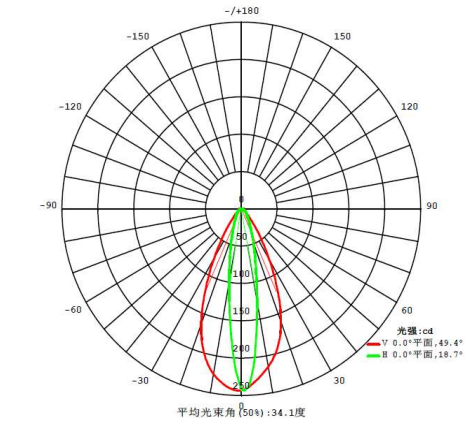

Cree XTE---18.7*49.4°


Mechanical Characteristics (产品尺寸):

(Single Lens)

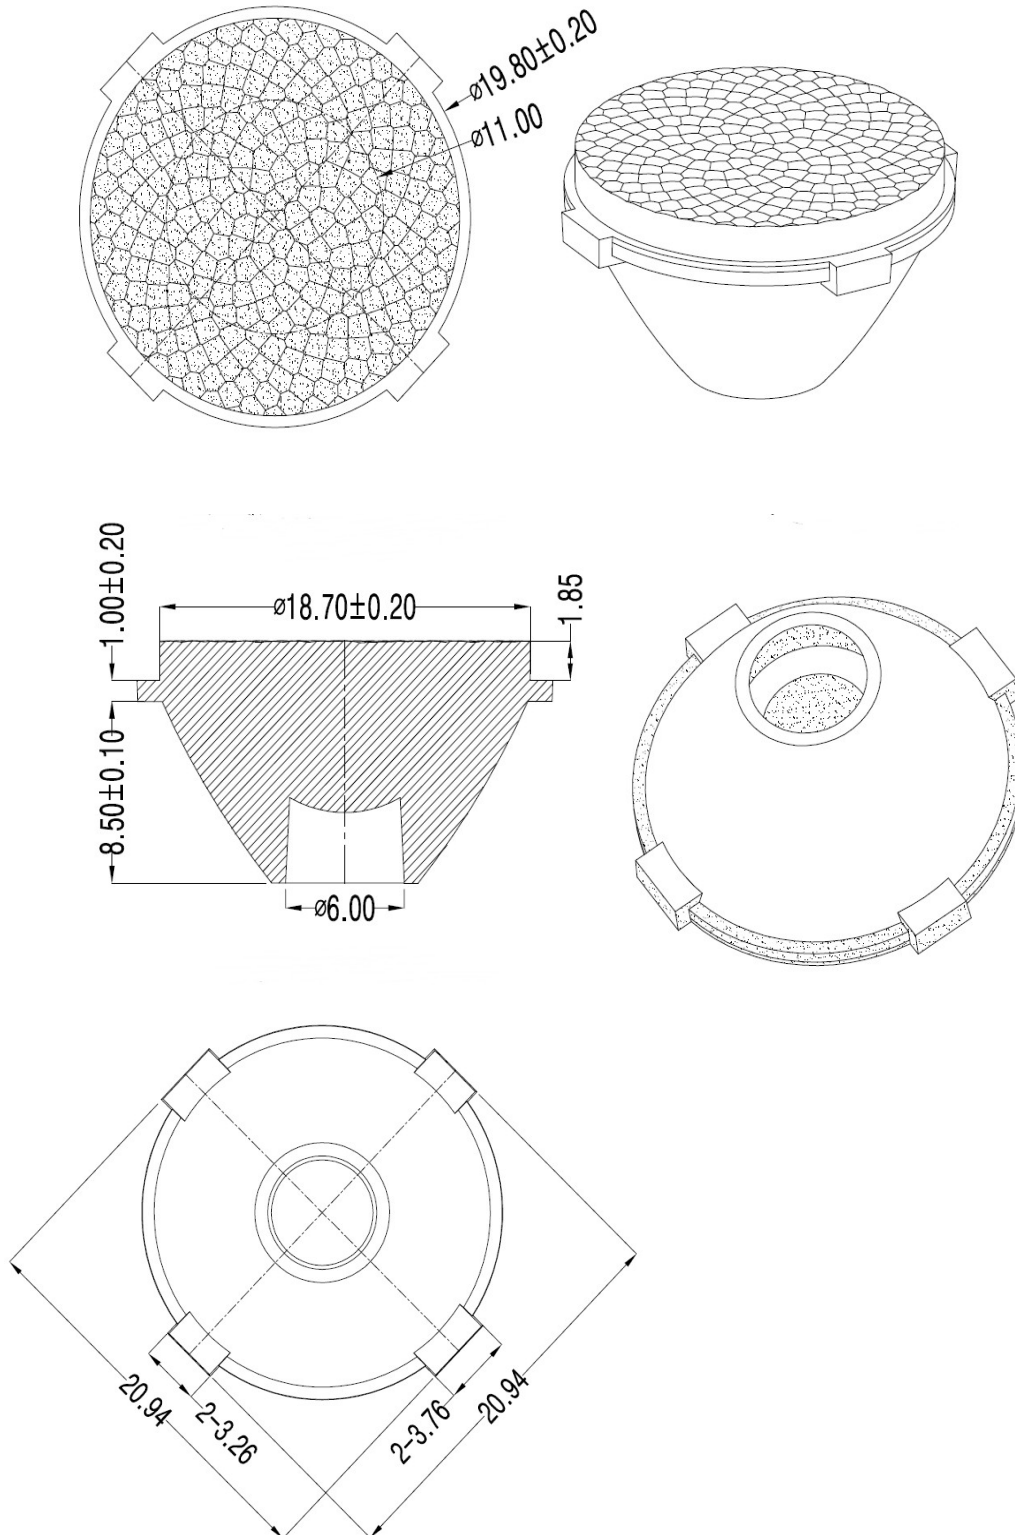


Mechanical Characteristics (产品尺寸):

(Holder+Tape assembly)

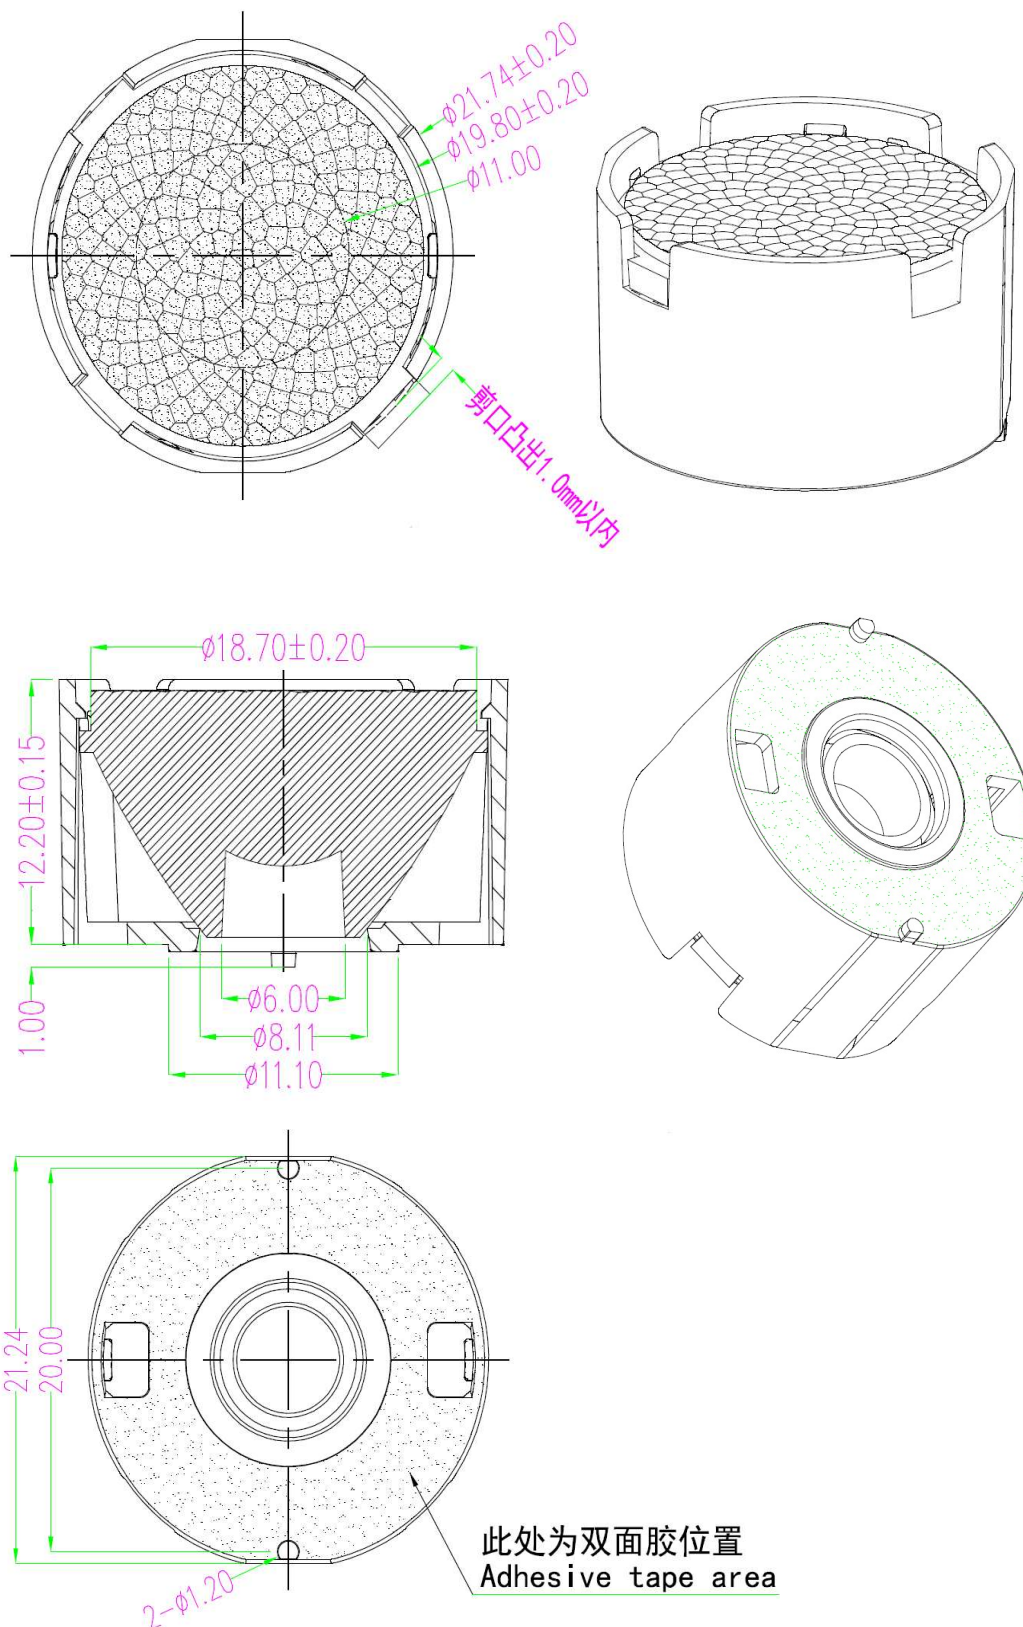


Mechanical Characteristics (产品尺寸):

(Holder+Clip assembly)

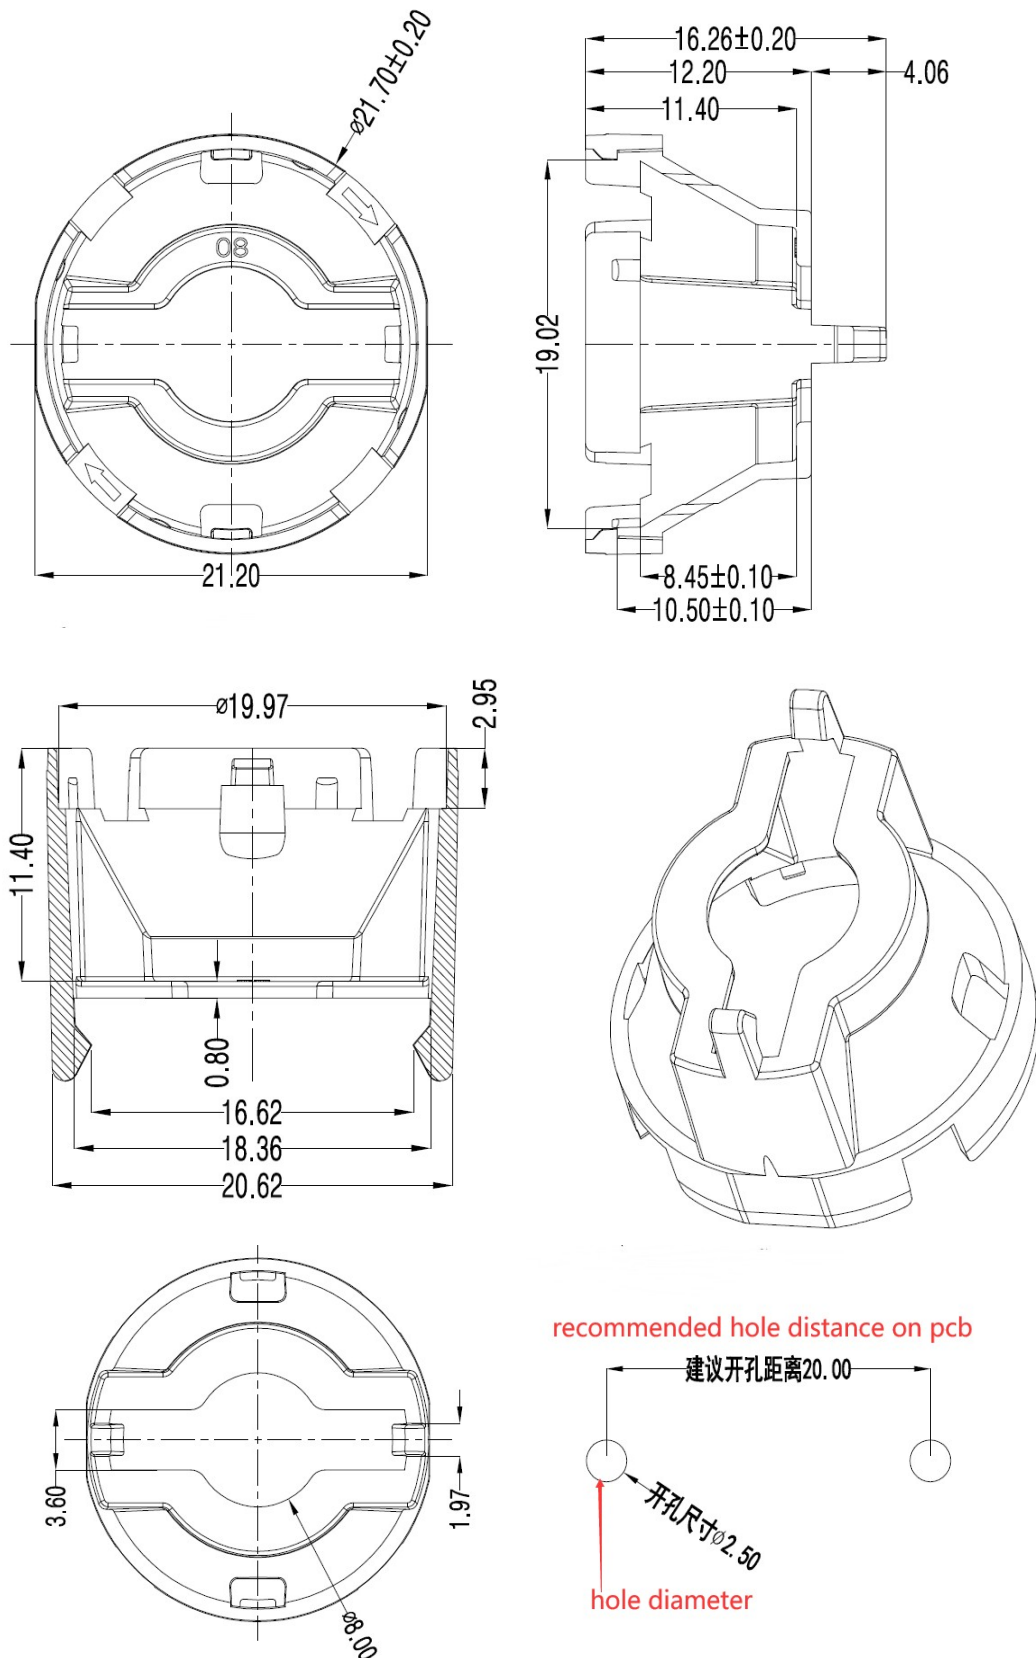

Mechanical Characteristics (产品尺寸):

(Holder+Glue assembly)

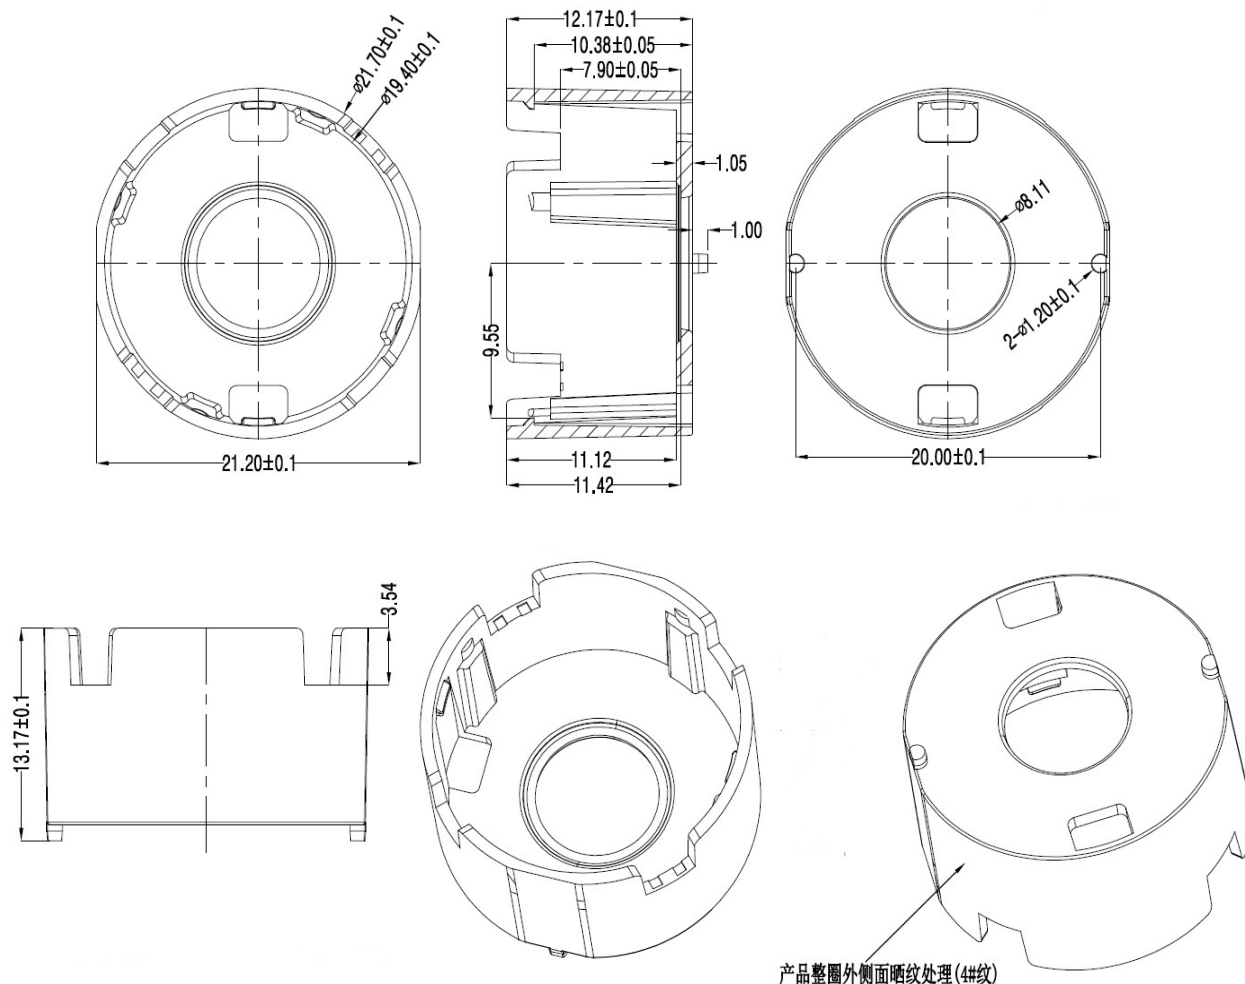

Product Package (产品包装):

Inner Box (内盒)	Outer Carton (外箱)
	
25pcs/layer 9 layers/box Gross weight: 860g/box Box dimension: 12.2*12.3*13.4cm	20boxes/carton 4,500pcs/carton Gross weight: 18.0kg/CTN Carton Dimension: 64*29*26cm