

Product Parameters (产品描述)

产品编号 Part Number:	KB-HB96W-xx-520116-5050	安装方式 Fastening:	Screw
出光角度 Beam Angle:	15/20/40/60/90/ASYM	防水圈 Silica seal :	available
产品材料 Material:	PC	透光率 Transmittance:	93%
工作温度 Work Temp:	< 105°C	匹配LED Match Led:	Dome 3535/SMD5050




Part Number	Led Qty	Dimension	Beam Angle
KB-HB96W-15-520116-XP	96pcs	L520*W116MM	~15°
KB-HB96W-20-520116-5050	96pcs	L520*W116MM	~20°
KB-HB96W-40-520116-5050	96pcs	L520*W116MM	~40°
KB-HB96W-60-520116-5050	96pcs	L520*W116MM	~60°
KB-HB96W-90-520116-5050	96pcs	L520*W116MM	~90°
KB-SL96W-T3VS-520116-5050	96pcs	L520*W116MM	Polarized

Direction for Use




(透镜 | LENS)

- 1, Please use some soft paper or pure water to clean lens (reflector)
- 2, Don't use any industrial solvent to clean lens surface , such as alcohol
- 3, Storage environment : Temperature 0~40°C , Humidity 30%~95%
- 4, This kind of lens can make the lighting more concentrated, and it's made from transparent material , so please do not open the packages until you use them, in case of the dust and other pollutions.

Light Distribution Curve (配光曲线图):

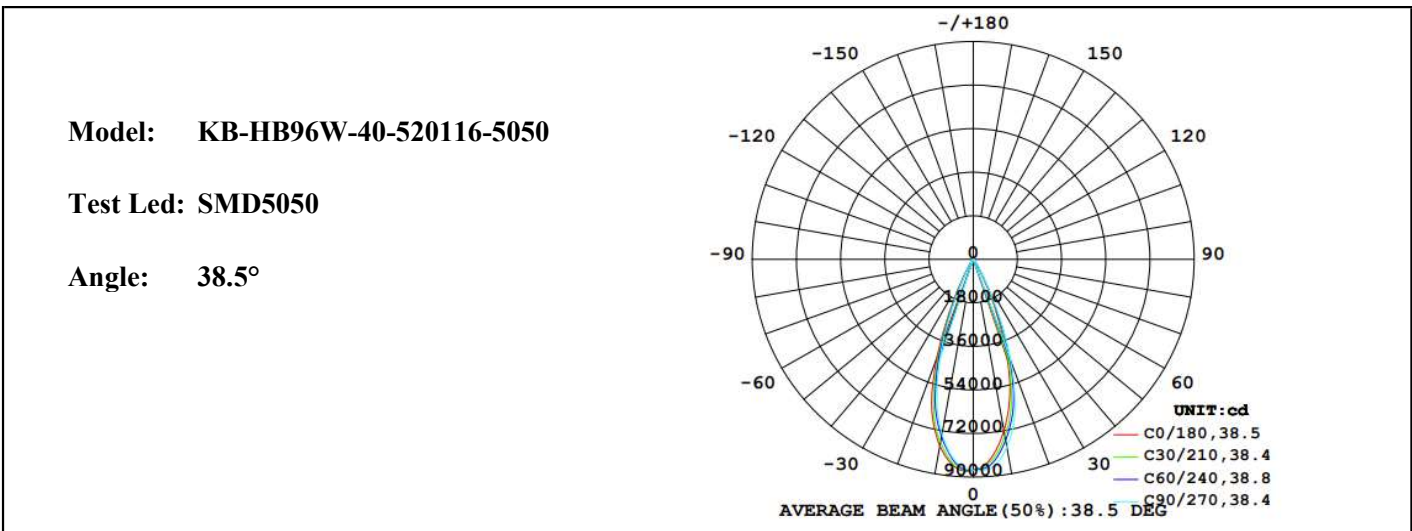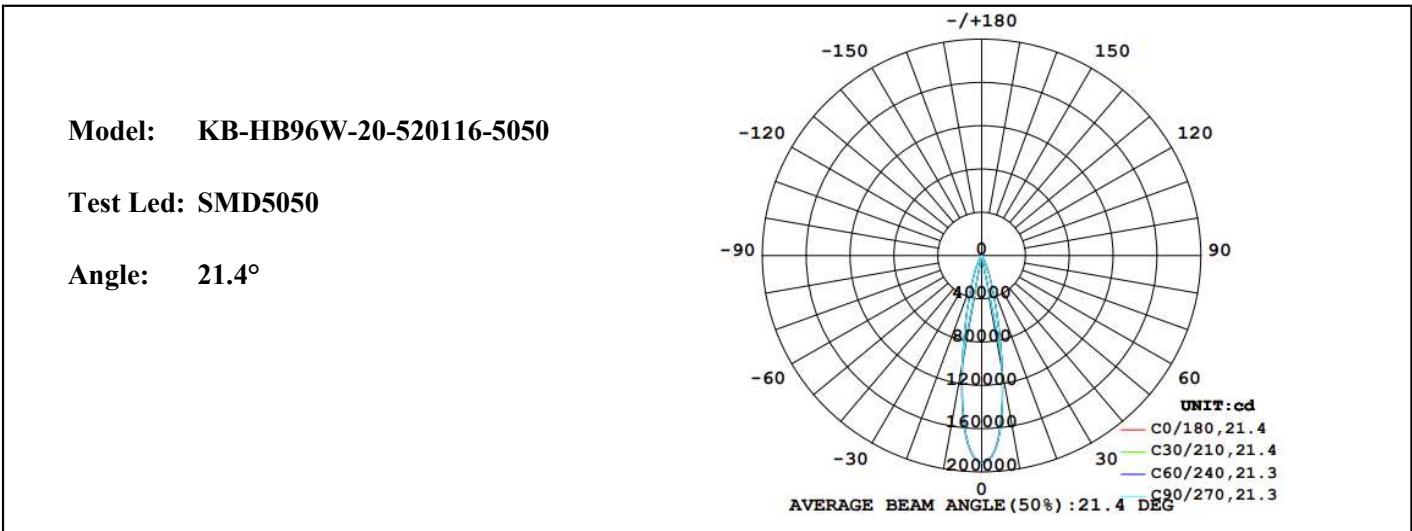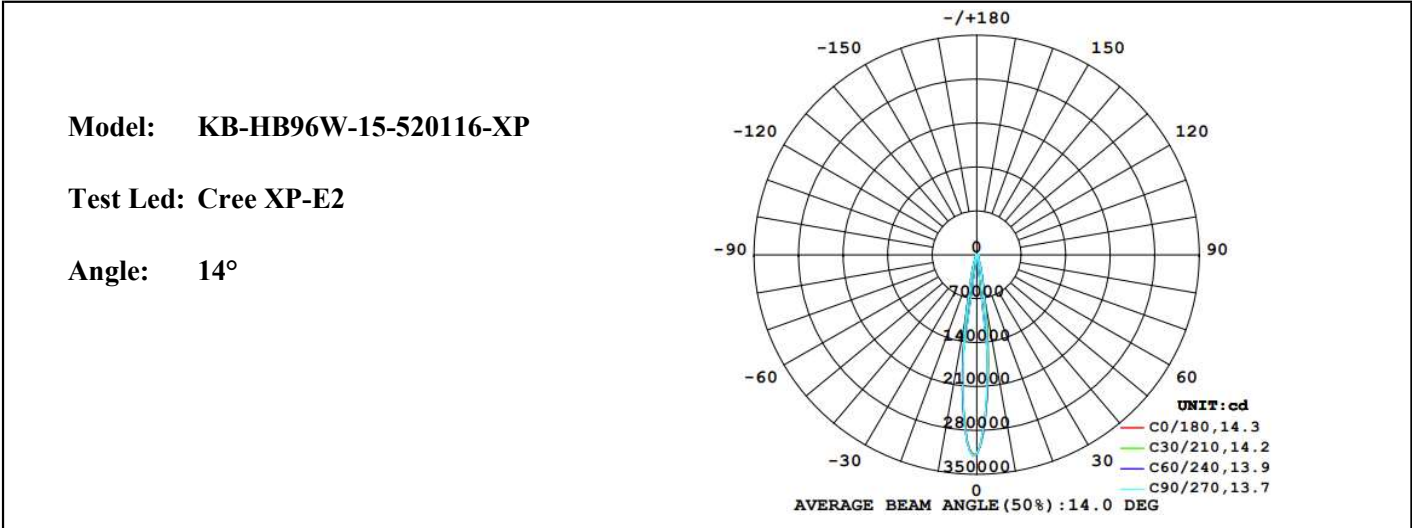

Light Distribution Curve (配光曲线图):

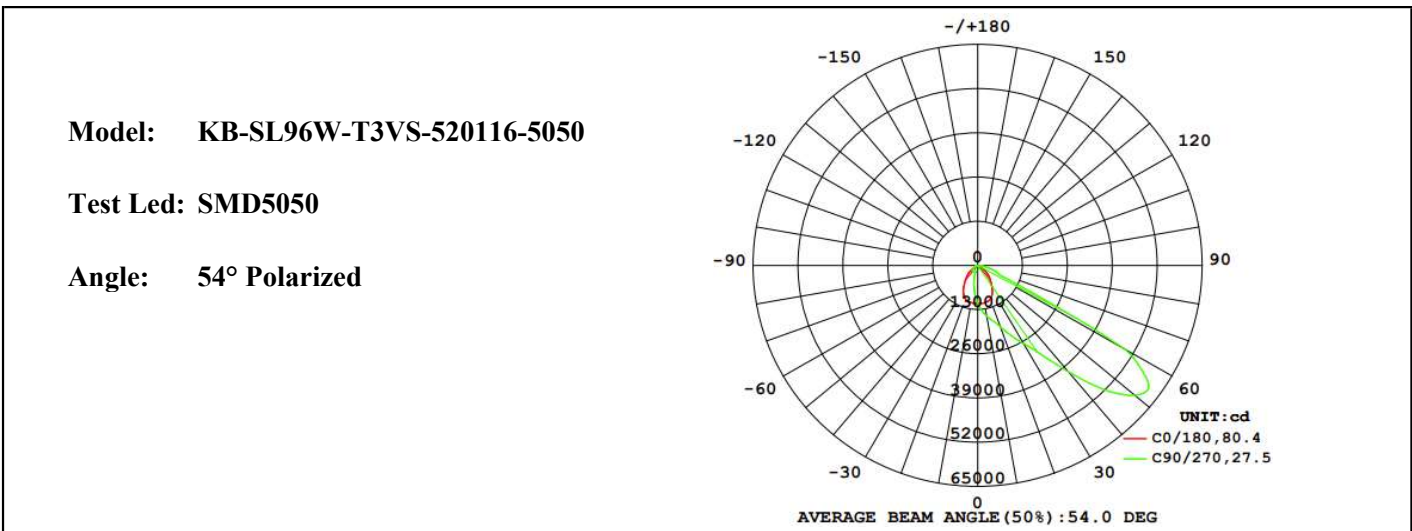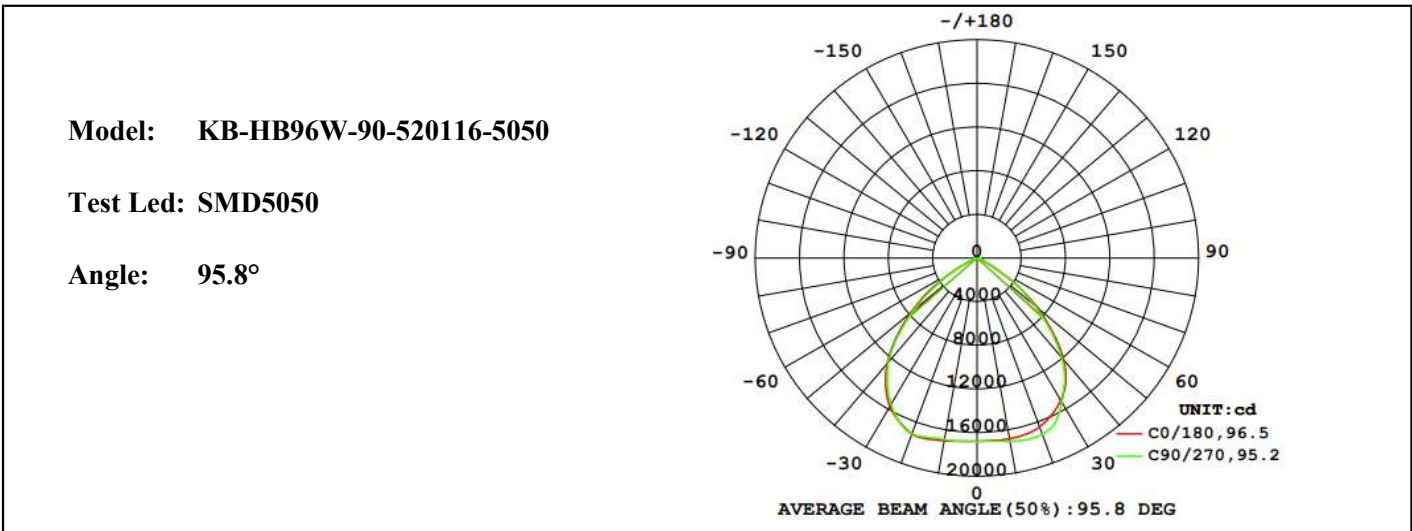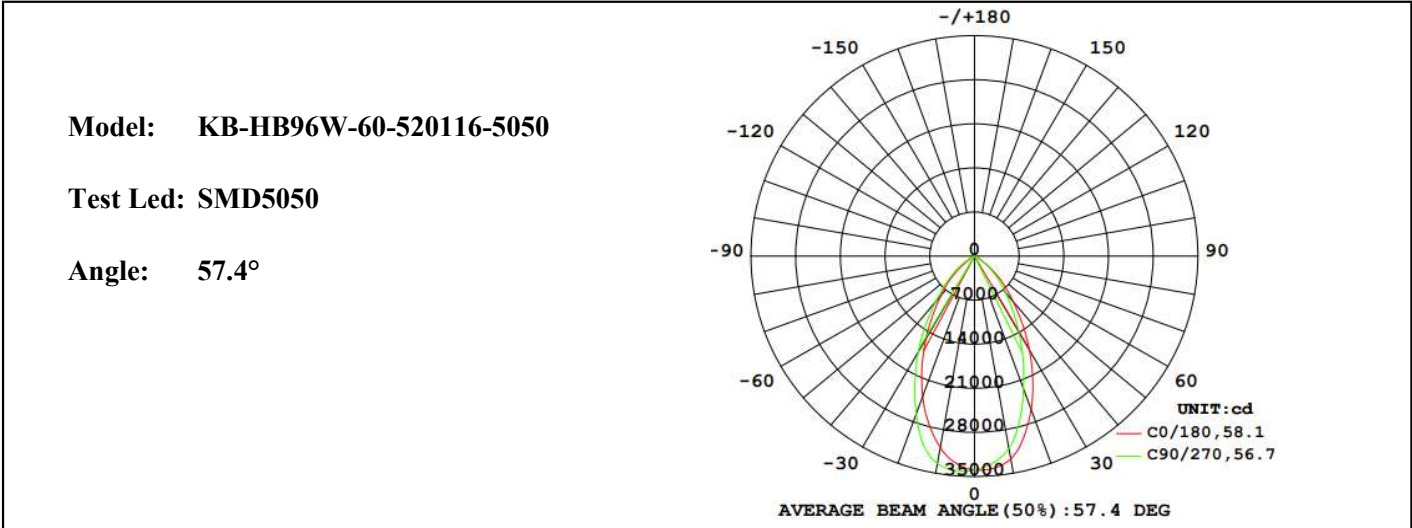

Mechanical Characteristics (产品尺寸):

