

**Product Parameters (产品描述)**

产品编号 | Part Number: KB-HB/SL24W-xx-5050  
 出光角度 | Beam Angle: 30/60/90/Asymmetric  
 产品材料 | Material: PC  
 工作温度 | Work Temp: <105℃

安装方式 | Fastening: Screw  
 防水圈 | Silica seal : available  
 透光率 | Transmittance: 93%  
 匹配LED | Match Led: SMD5050


Part Number	Lens Surface	Dimension	Beam Angle
KB-HB24W-30-5050	镜面/clear	L173*W71.4mm	~30°
KB-HB24W-60-5050	镜面/clear	L173*W71.4mm	~60°
KB-HB24W-90-5050	镜面/clear	L173*W71.4mm	~90°
KB-SL24W-T2M-5050	镜面/clear	L173*W71.4mm	Type II-M
KB-SL24W-T4VT-5050	镜面/clear	L173*W71.4mm	Type IV

**Light Distribution Curve (配光曲线图):**

Part Number: KB-HB24W-30-5050

Test Led: SMD5050


Beam Angle: 31°

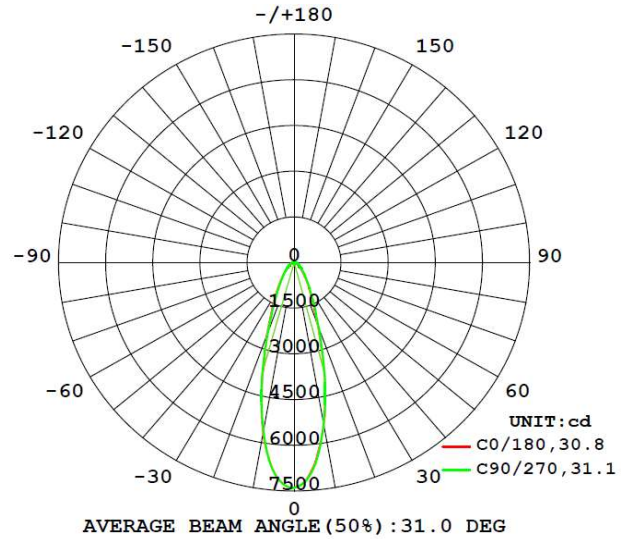

Part Number: KB-HB24W-60-5050

Test Led: SMD5050


Beam Angle: 60.2°

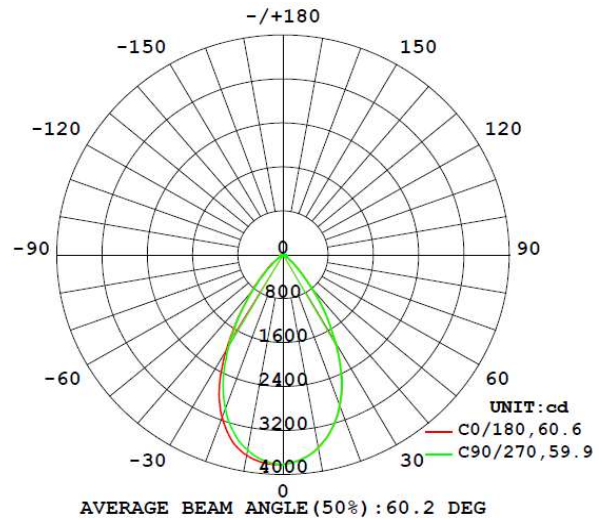

Part Number: KB-HB24W-90-5050

Test Led: SMD5050

Beam Angle: 90.1°

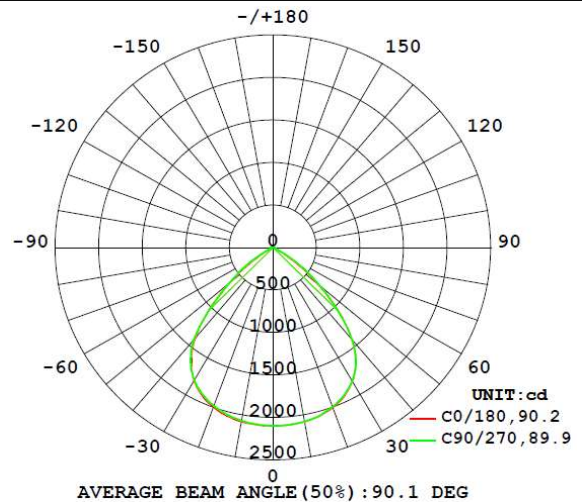


Light Distribution Curve (配光曲线图):

Part Number: KB-SL24W-T2M-5050

Test Led: SMD5050


Beam Angle: 84\*156.8°

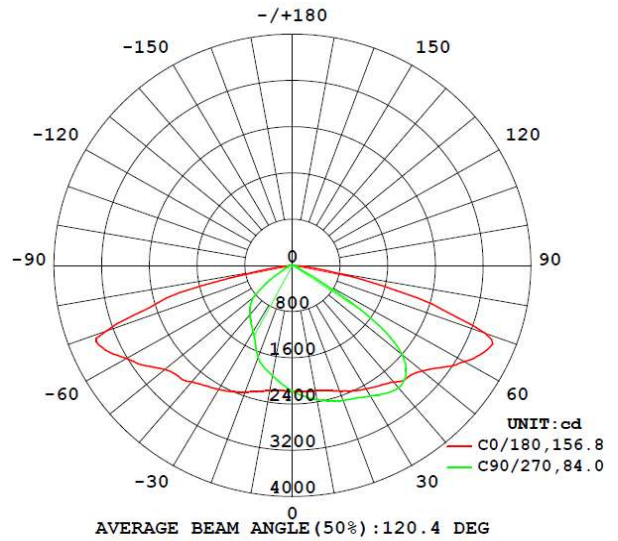



Part Number: KB-SL24W-T4VT-5050

Test Led: SMD5050



Beam Angle: 37.2\*146.1°

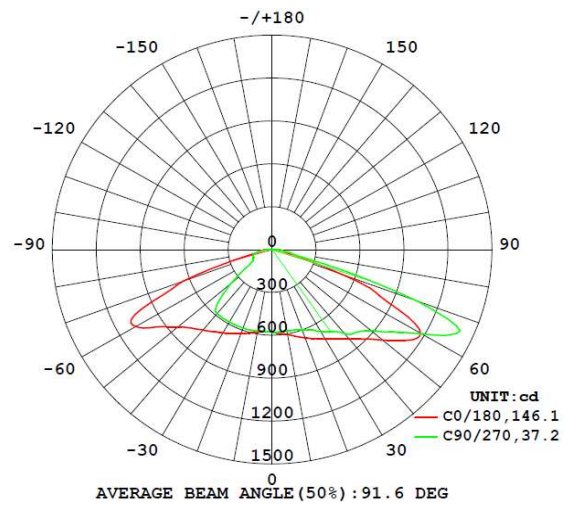

Mechanical Characteristics (产品尺寸):

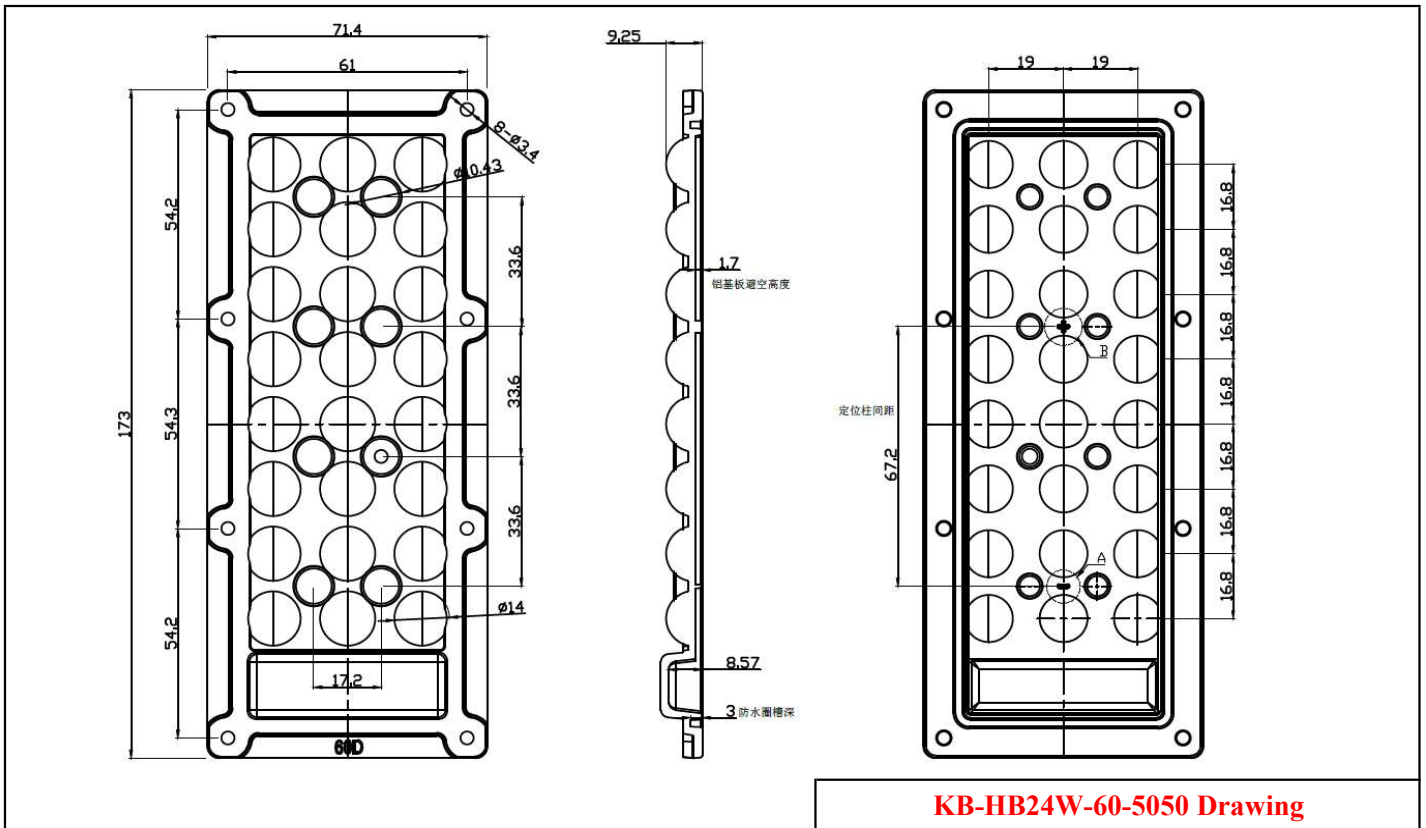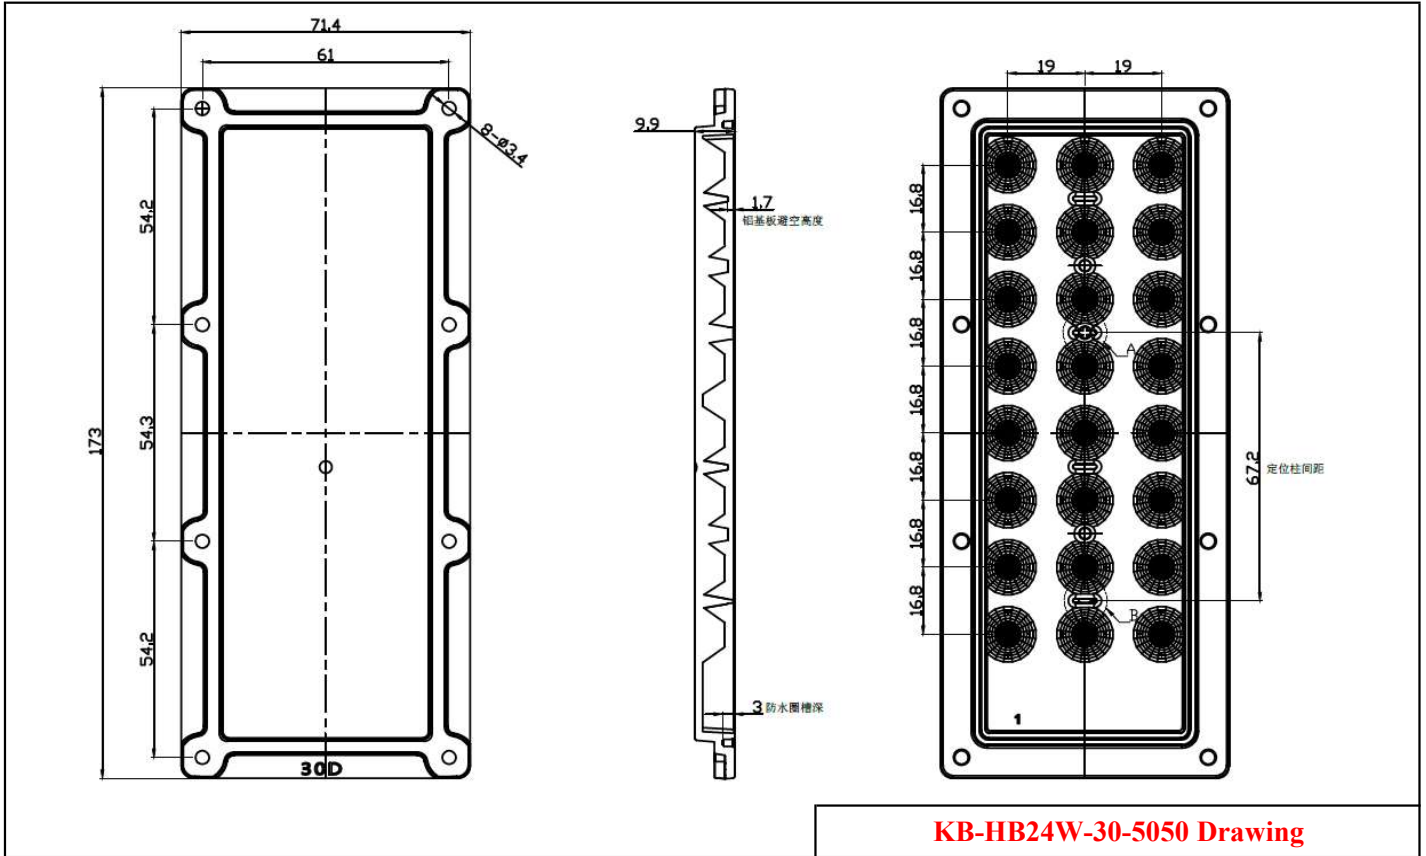

Mechanical Characteristics (产品尺寸):

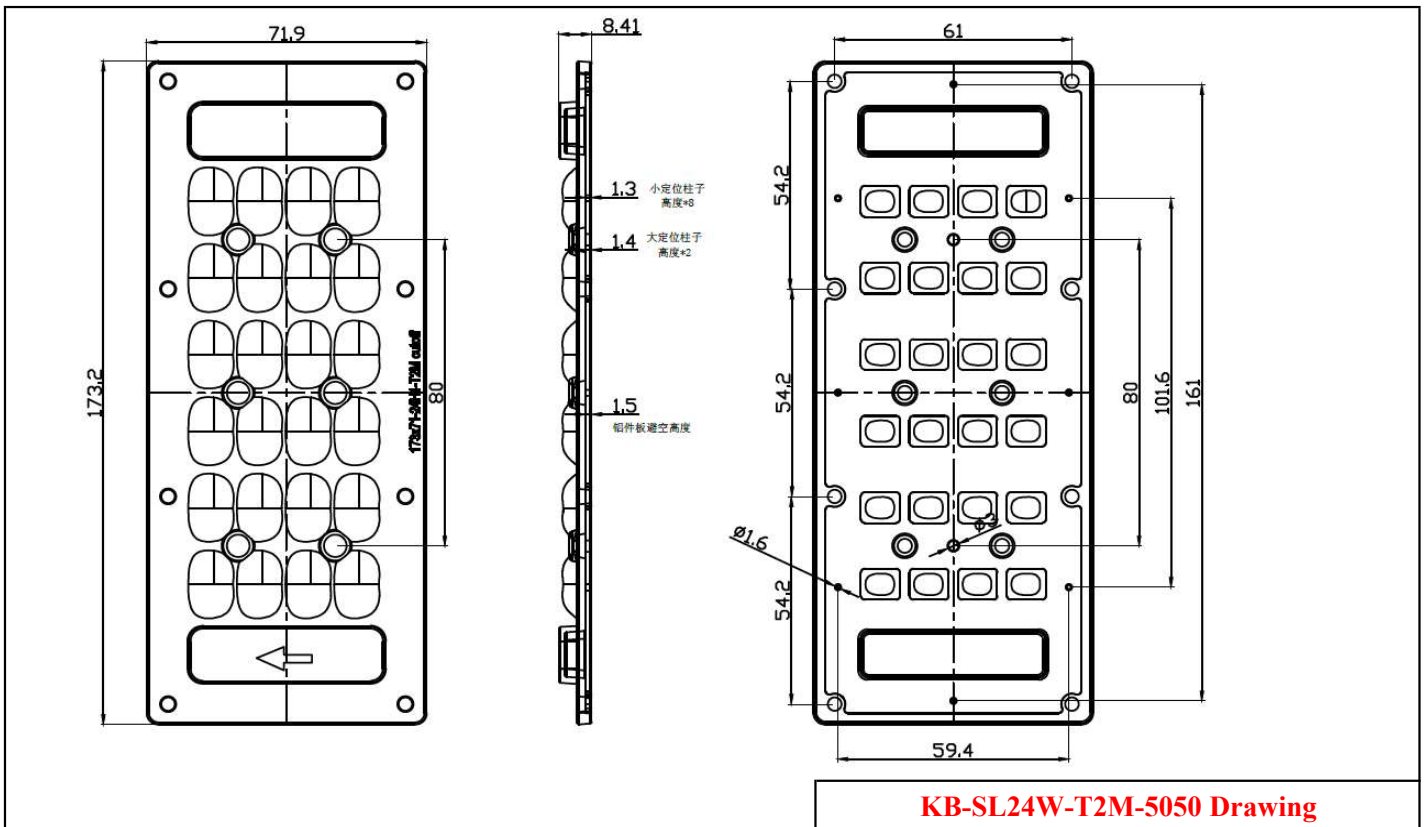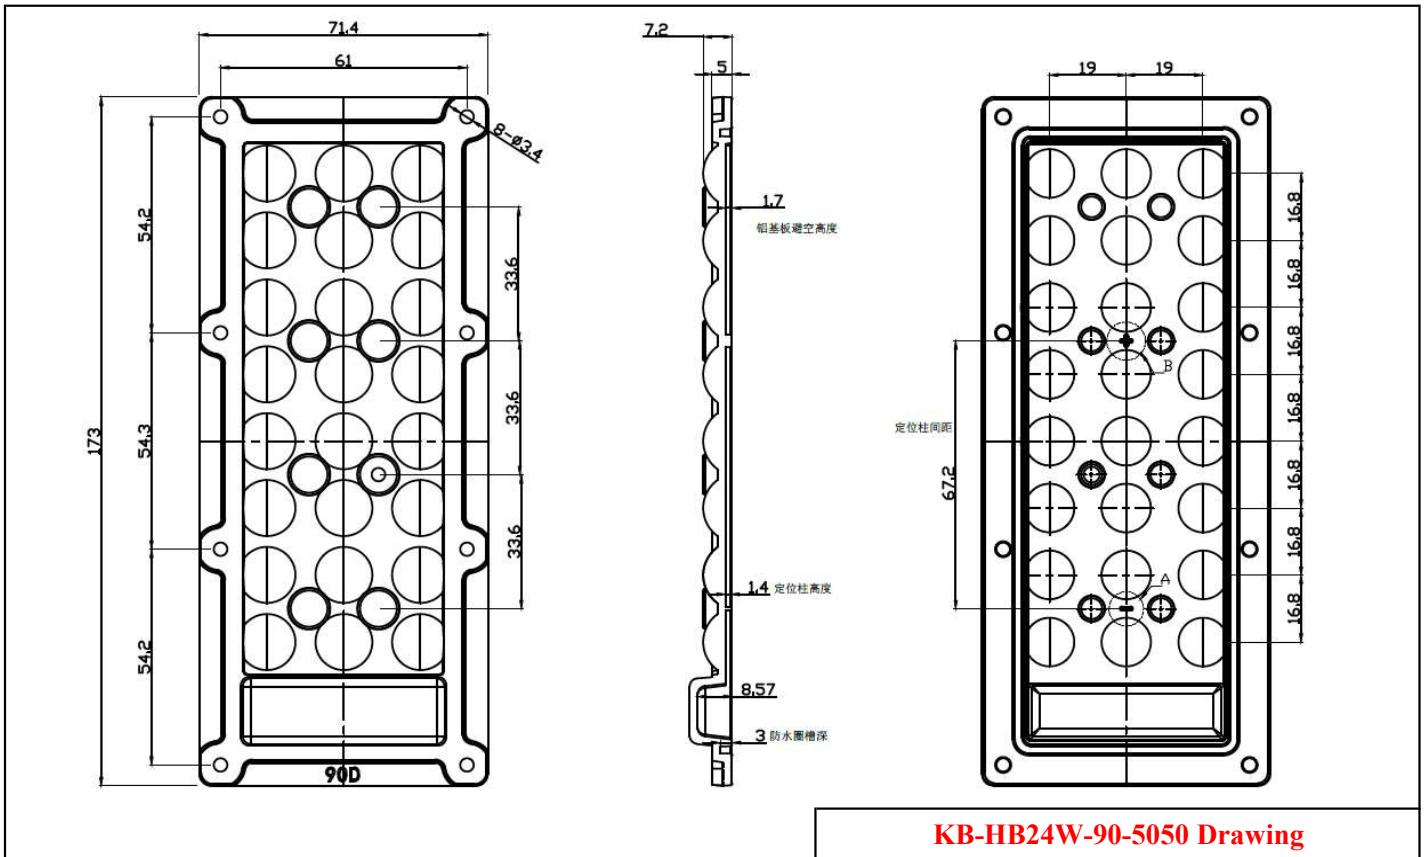

Mechanical Characteristics (产品尺寸):

