



Product Parameters (产品描述)

产品编号 | Part Number: KB-FSxx-RG
出光角度 | Beam Angle: Zoomable
产品材料 | Material: PMMA

安装方式 | Fastening: Frame
工作温度 | Work Temp: <85°C
透光率 | Transmittance: 93%

Part Number	Match Led	Dimension	Beam Angle
KB-FS13-RG	All Leds	φ13*H2.3mm	5~55°
KB-FS22.9-RG	All Leds	φ22.9*H2.2mm	5~55°
KB-FS32-RG	All Leds	φ32*H2.2mm	5~55°
KB-FS38-RG	All Leds	φ38*H2.2mm	5~55°
KB-FS45-RG	All Leds	φ45*H2.2mm	5~55°
KB-FS52-RG	All Leds	φ52.1*H2.3mm	5~55°
KB-FS62-RG	All Leds	φ62*H2.2mm	5~55°
KB-FS70-RG	All Leds	φ70.3*H2.0mm	5~55°
KB-FS80-RG	All Leds	φ80.4*H2.2mm	5~55°




*****Important Lens Assembly Tips: Transparent side toward led, Fresnel side toward outside**

Direction for Use




(透镜 | LENS)

- 1, Please use some soft paper or pure water to clean lens (reflector)
- 2, Don't use any industrial solvent to clean lens surface , such as alcohol
- 3, Storage environment : Temperature 0~40℃ , Humidity 30%~95%
- 4, This kind of lens can make the lighting more concentrated, and it's made from transparent material , so please do not open the packages until you use them, in case of the dust and other pollutions.

Mechanical Characteristics (产品尺寸):

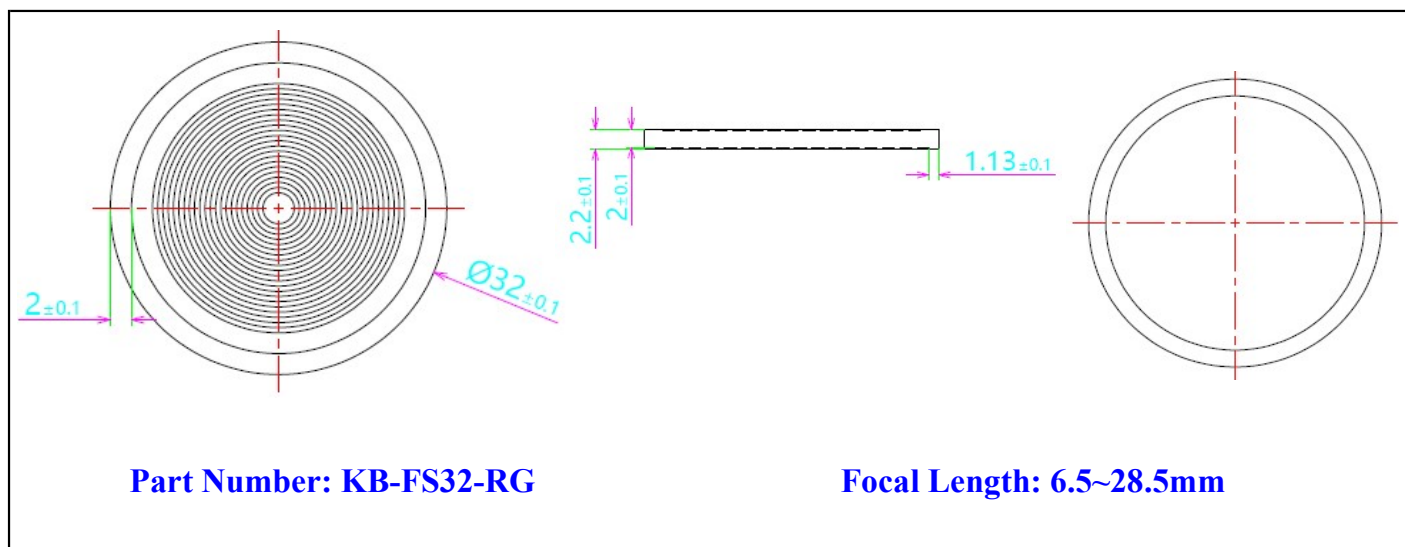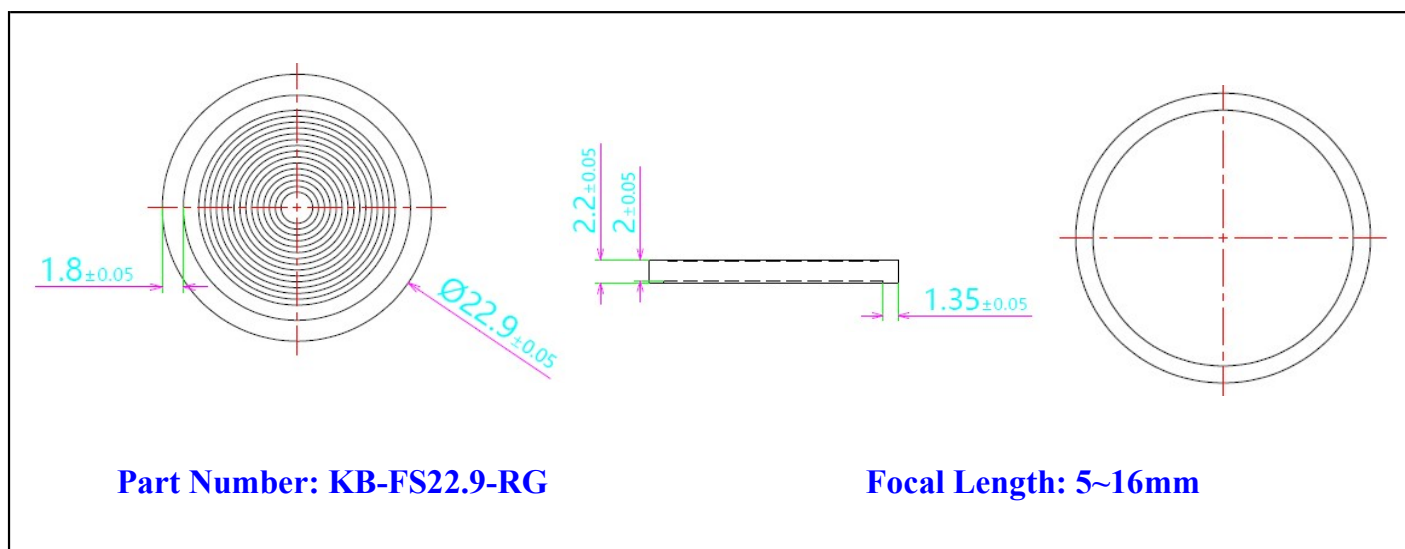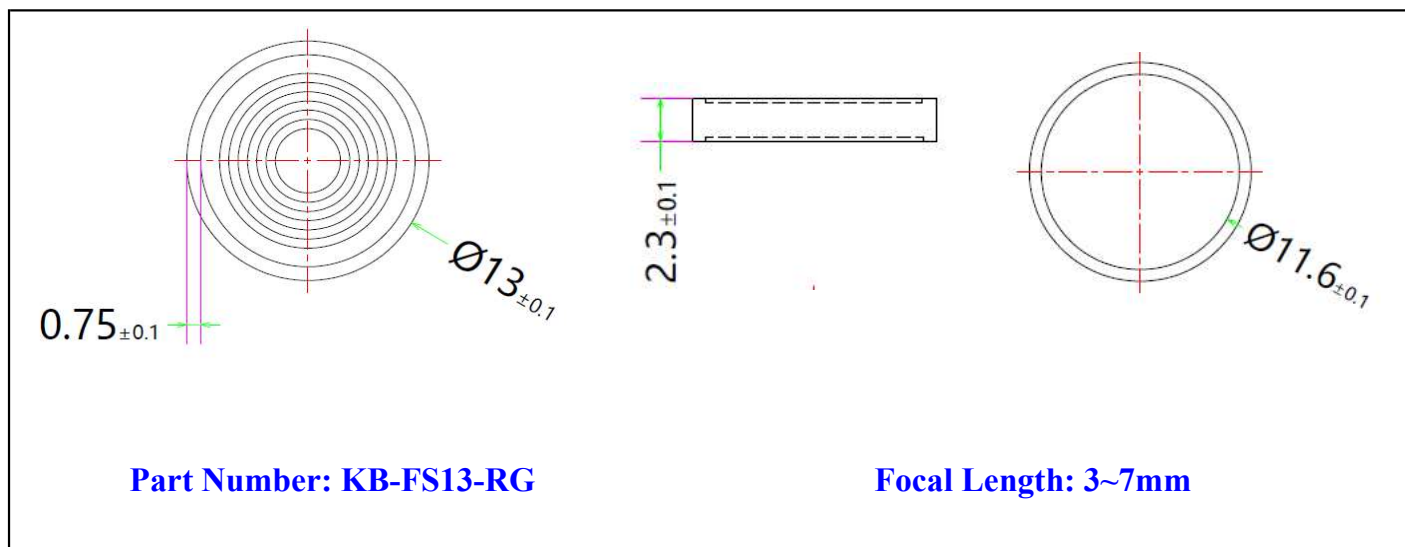

Mechanical Characteristics (产品尺寸):

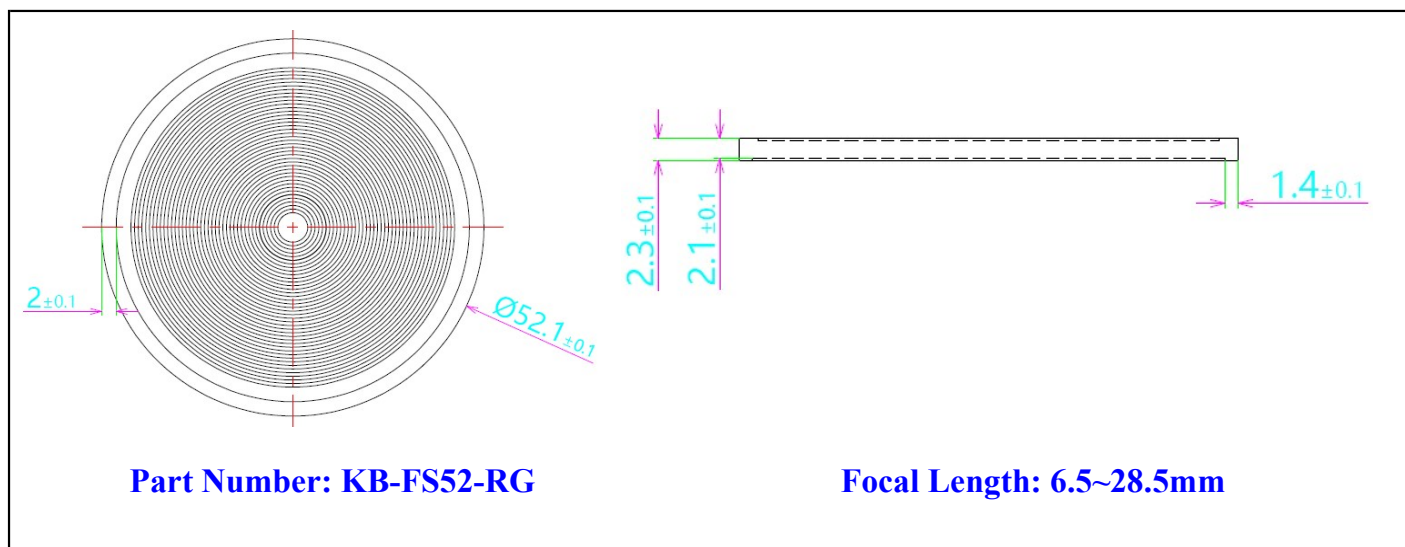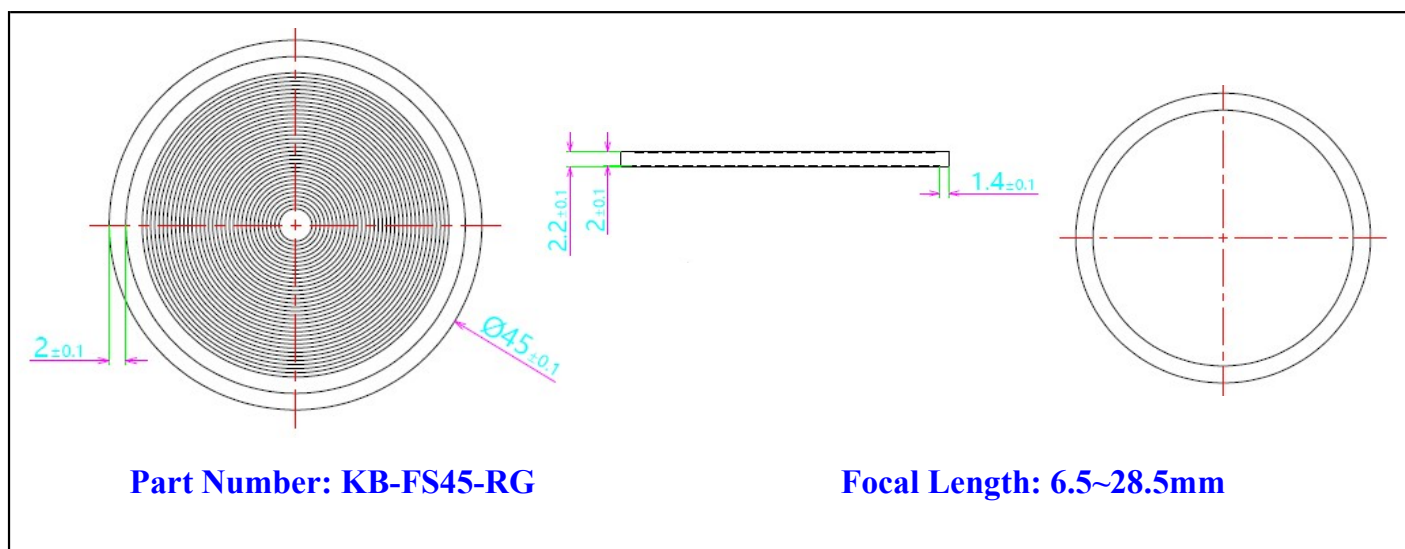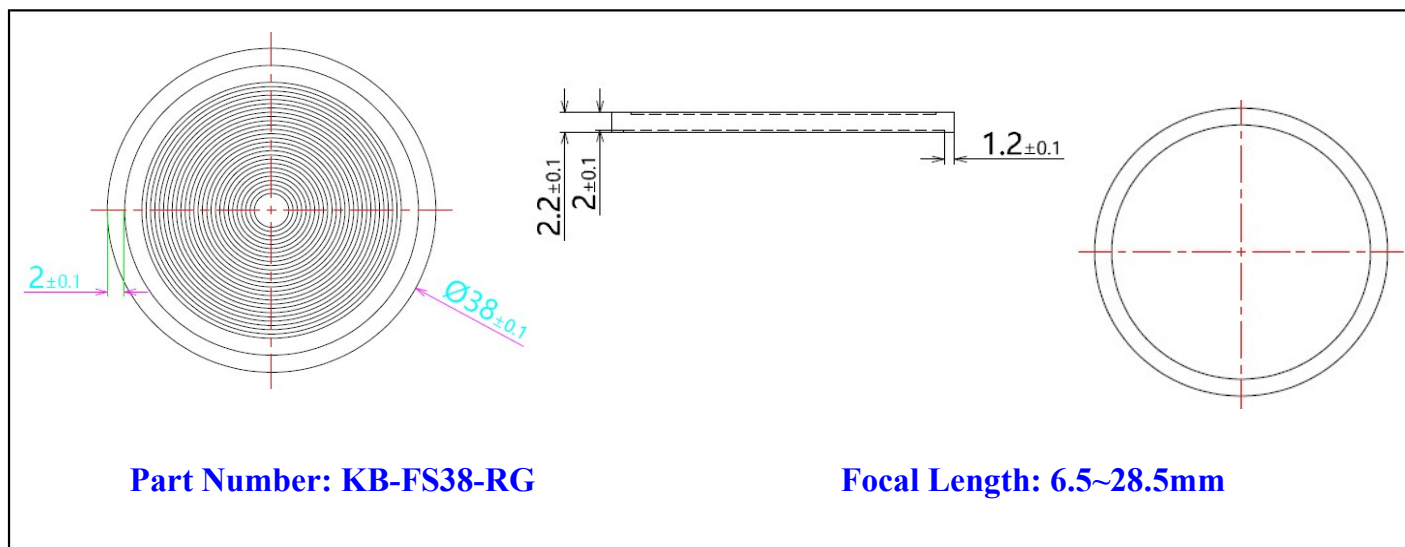

Mechanical Characteristics (产品尺寸):

