



Product Parameters (产品描述)

产品编号 | Part Number: KB-FSxx-QG
出光角度 | Beam Angle: Zoomable
产品材料 | Material: PMMA

安装方式 | Fastening: Frame
工作温度 | Work Temp: <85°C
透光率 | Transmittance: 93%

Part Number	Match Led	Dimension	Beam Angle
KB-FS13-QG	All Leds	Φ13*H2.3mm	5~55°
KB-FS22.9-QG	All Leds	Φ22.9*H2.2mm	5~55°
KB-FS32-QG	All Leds	Φ32*H2.2mm	5~55°
KB-FS38-QG	All Leds	Φ38*H2.2mm	5~55°
KB-FS45-QG	All Leds	Φ45*H2.2mm	5~55°
KB-FS52-QG	All Leds	Φ52.1*H2.3mm	5~55°
KB-FS62-QG	All Leds	Φ62*H2.2mm	5~55°
KB-FS70-QG	All Leds	Φ70.3*H2.0mm	5~55°
KB-FS80-QG	All Leds	Φ80.4*H2.2mm	5~55°
KB-FS90-QG	All Leds	Φ90.0*H2.6mm	5~55°




*****Important Lens Assembly Tips: Smooth side toward led, Fresnel side toward outside**

Direction for Use




(透镜 | LENS)

- 1, Please use some soft paper or pure water to clean lens (reflector)
- 2, Don't use any industrial solvent to clean lens surface , such as alcohol
- 3, Storage environment : Temperature 0~40℃ , Humidity 30%~95%
- 4, This kind of lens can make the lighting more concentrated, and it's made from transparent material , so please do not open the packages until you use them, in case of the dust and other pollutions.




Mechanical Characteristics (产品尺寸):

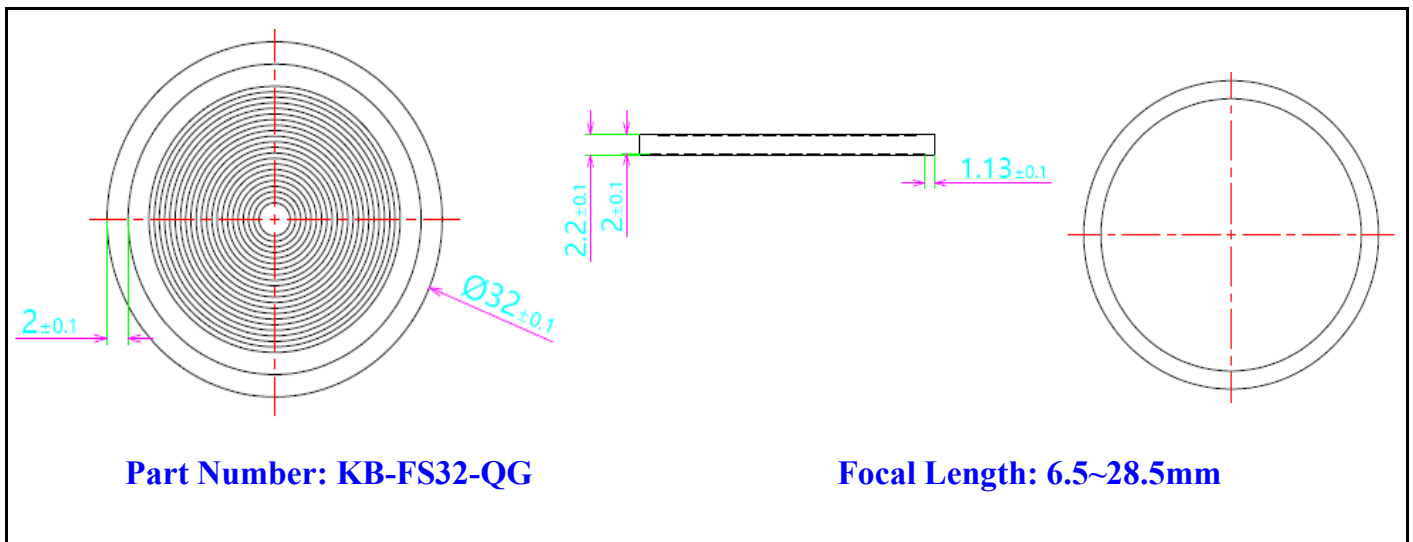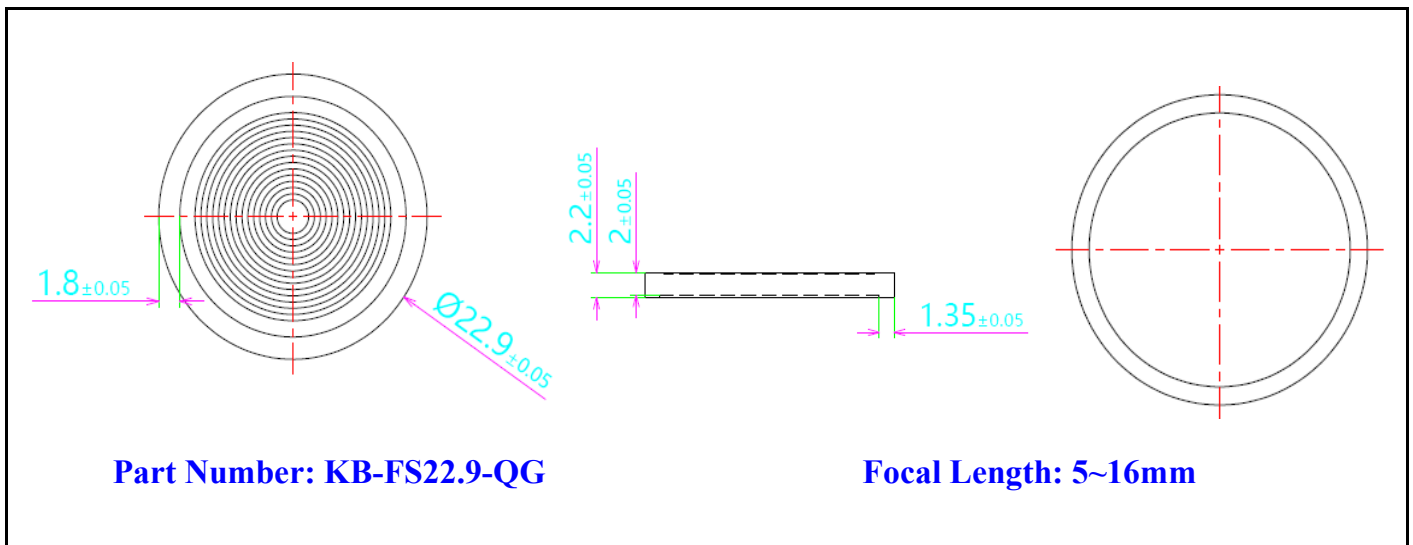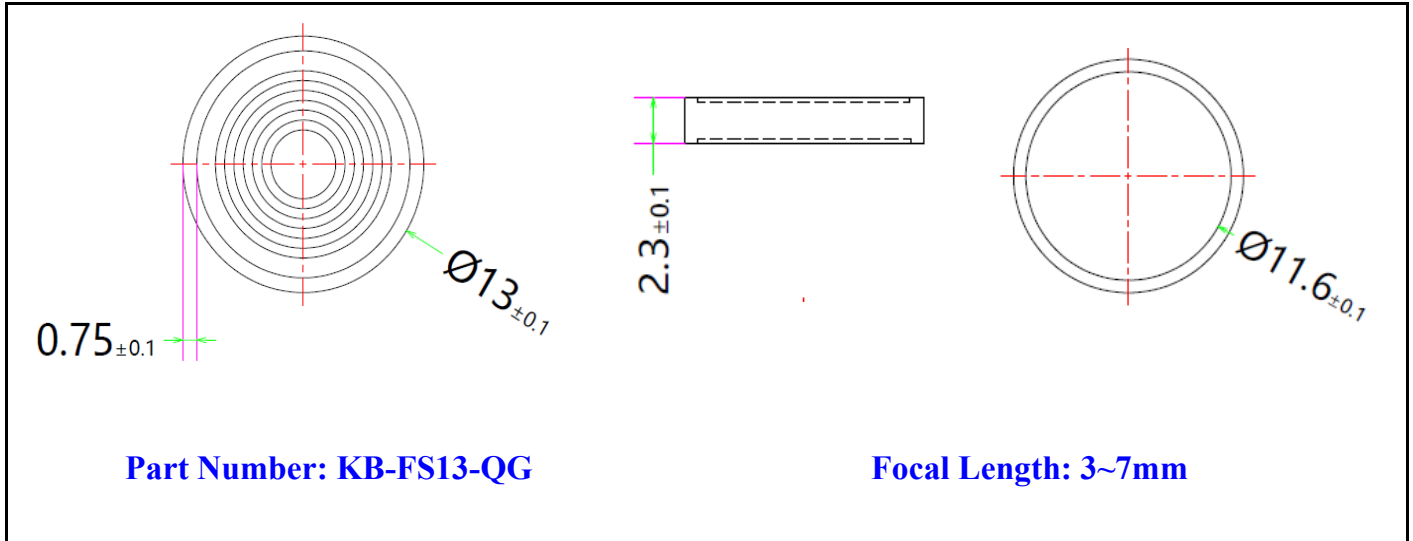

Mechanical Characteristics (产品尺寸):

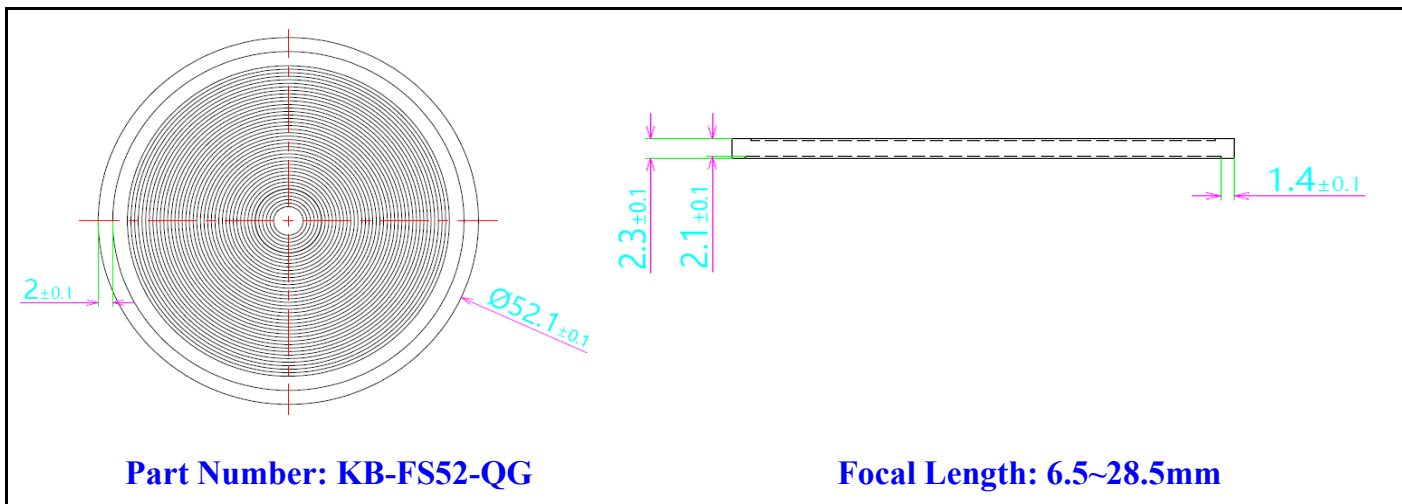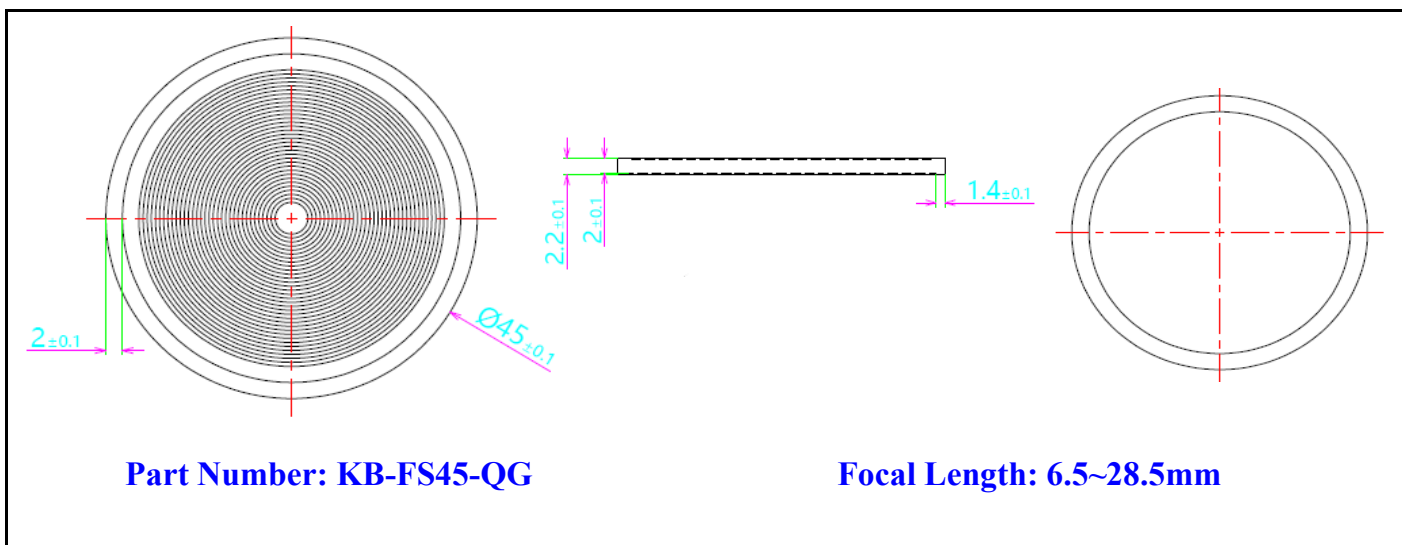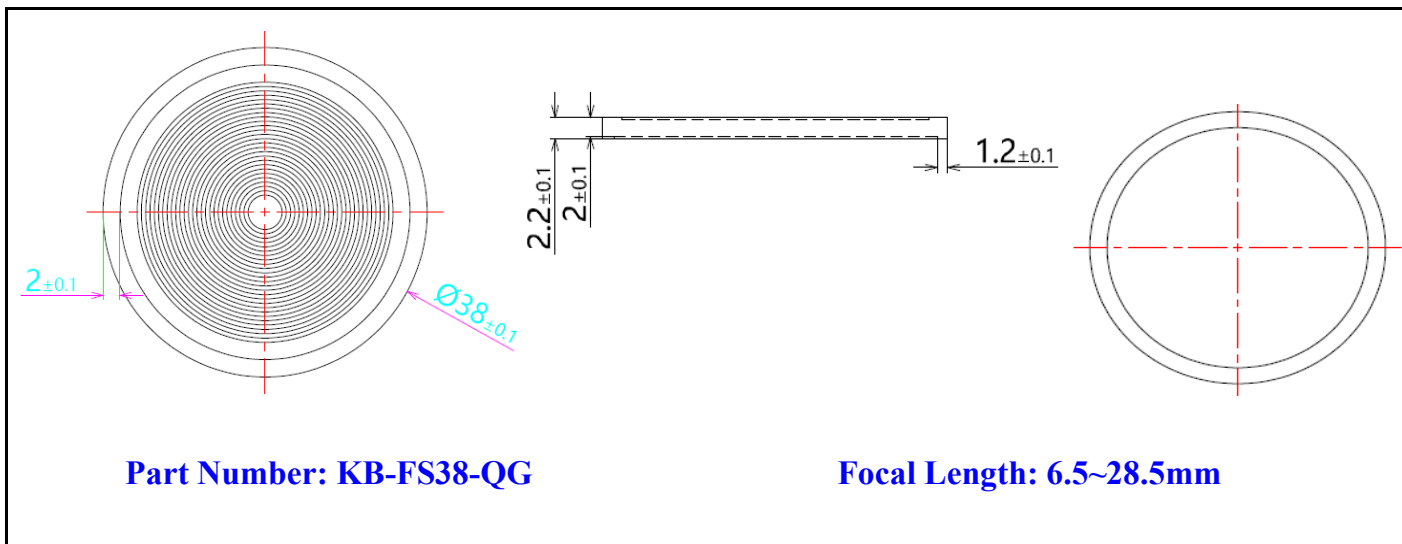

Mechanical Characteristics (产品尺寸):

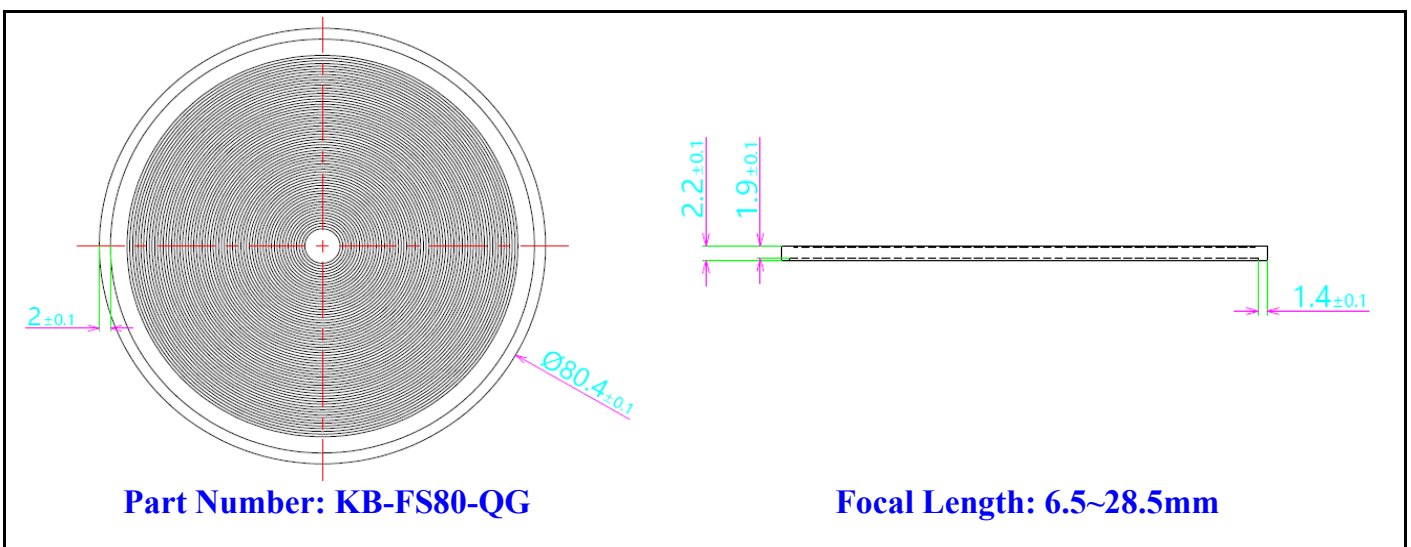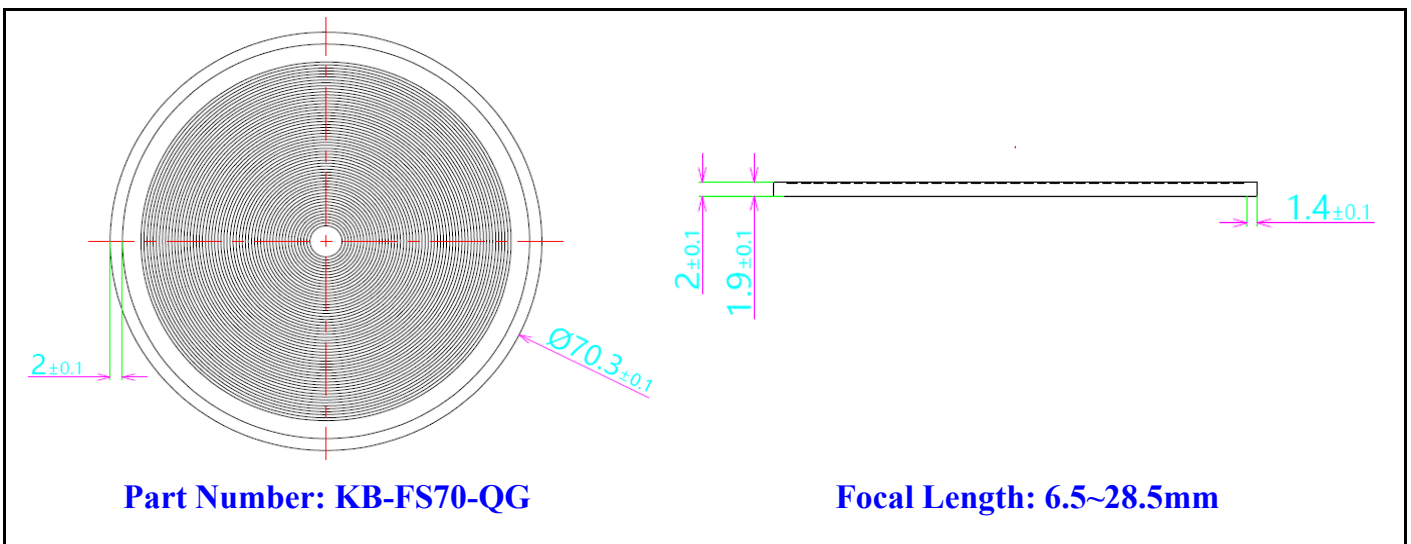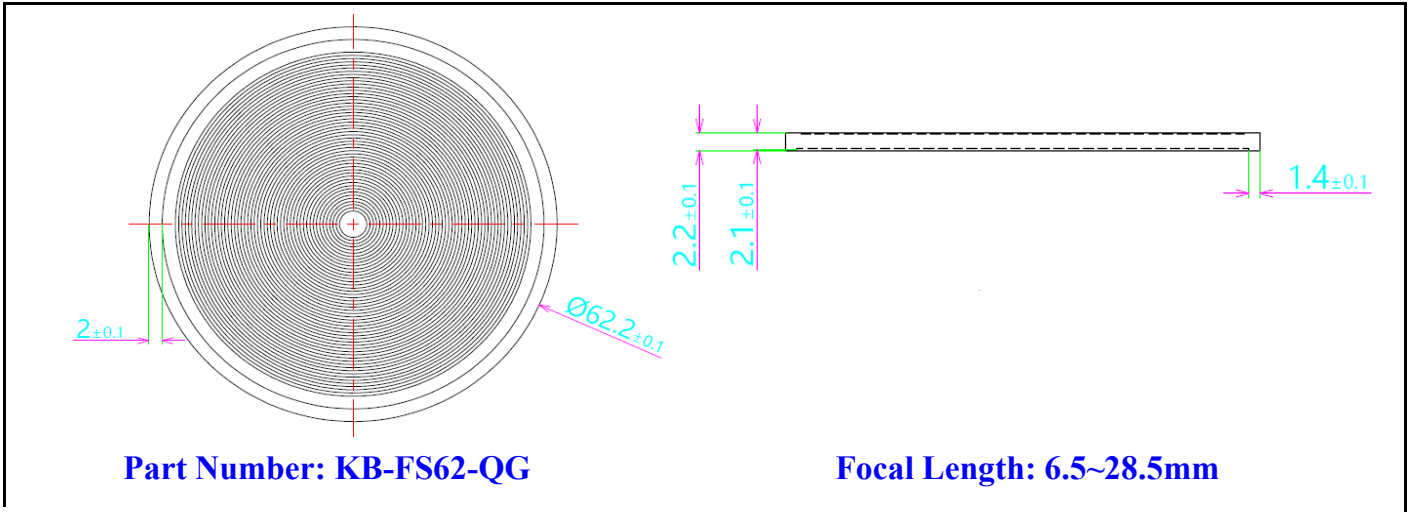

Mechanical Characteristics (产品尺寸):

