

**Product Parameters (产品描述)**

产品编号 | Part Number: KB-LN12-xx
 出光角度 | Beam Angle: 40/70/90/Asym
 产品材料 | Material: PMMA
 工作温度 | Work Temp: <85°C

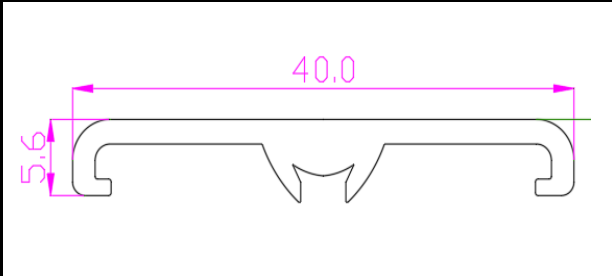
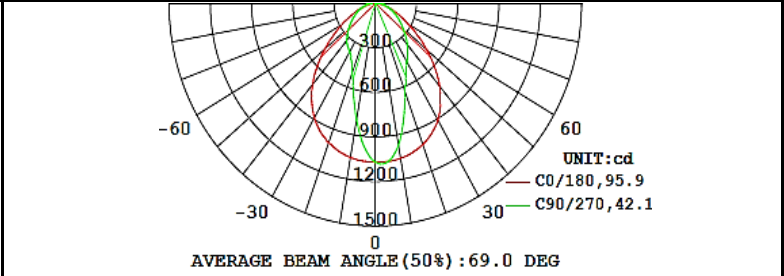


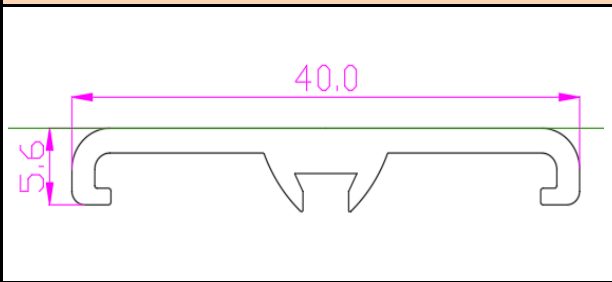
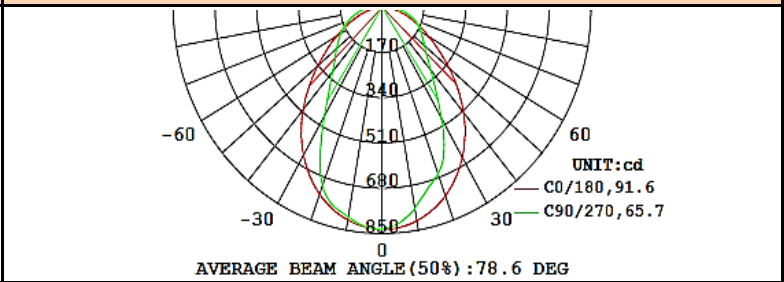


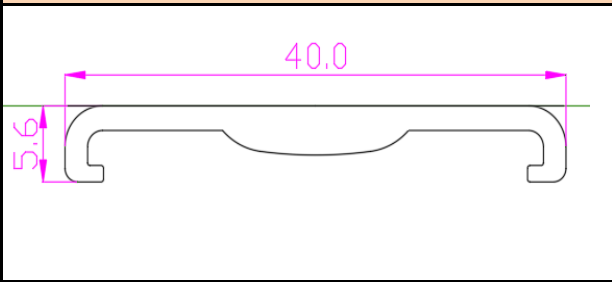
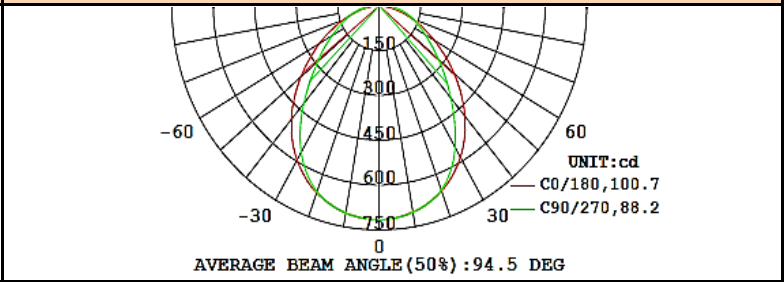
安装方式 | Fastening: snaps
 支架颜色 | /N/A
 透光率 | Transmittance:85~93%
 匹配LED | Match Led:2835|3030|3535

Part Number	Lens Surface	Dimension	Beam Angle
KB-LN40S-40	珠面/Beads	W40mm*L cuttable	~40°
KB-LN40S-70	珠面/Beads	W40mm*L cuttable	~70°
KB-LN40S-90	珠面/Beads	W40mm*L cuttable	~90°
KB-LN40S-AS	雾面/matt	W40mm*L cuttable	~Asymmetric
KB-LN40S-DAS	珠面/Beads	W40mm*L cuttable	~Double Asymmetric

Direction for Use**(透镜 | LENS)**

- 1, Please use some soft paper or pure water to clean lens (reflector)
- 2, Don't use any industrial solvent to clean lens surface , such as alcohol
- 3, Storage environment : Temperature 0~40°C , Humidity 30%~95%
- 4, This kind of lens can make the lighting more concentrated, and it's made from transparent material , so please do not open the packages until you use them, in case of the dust and other pollutions.

Light Distribution Curve (配光曲线图):

Product Drawing (KB-LN40S-40)	Light Distribution Curve(配光曲线图)
	 <p>UNIT:cd C0/180,95.9 C90/270,42.1 AVERAGE BEAM ANGLE (50%):69.0 DEG</p>
	 <p>UNIT:cd C0/180,91.6 C90/270,65.7 AVERAGE BEAM ANGLE (50%):78.6 DEG</p>
	 <p>UNIT:cd C0/180,100.7 C90/270,88.2 AVERAGE BEAM ANGLE (50%):94.5 DEG</p>
	 <p>UNIT:cd C0/180,95.9 C90/270,50.1 AVERAGE BEAM ANGLE (50%):73.0 DEG</p>
	 <p>UNIT:cd C0/180,129.4 C90/270,139.1 AVERAGE BEAM ANGLE (50%):134.2 DEG</p>