



Product Parameters (产品描述)

产品名称 Product Name: KB-HB/SL168W-xx-3030	安装方式 Fastening: Screw
出光角度 Beam Angle: 30/40/60/90/100/ASY	防水圈 Silica seal : available
产品材料 Material: PC	透光率 Transmittance: 93%
工作温度 Work Temp: <105°C	匹配LED Match Led: SMD3030/2835 Leds


Part Number	Match Led	LED QTY	Dimension	Beam Angle
KB-HB168W-30-3030	SMD3030/2835	168pcs	L286*W96mm	~30°
KB-HB168W-40-3030	SMD3030/2835	168pcs	L286*W96mm	~40°
KB-HB168W-60-3030	SMD3030/2835	168pcs	L286*W96mm	~60°
KB-HB168W-90-3030	SMD3030/2835	168pcs	L286*W96mm	~90°
KB-HB168W-100-3030	SMD3030/2835	168pcs	L286*W96mm	~100°
KB-SL168W-70*140-3030	SMD3030/2835	168pcs	L286*W96mm	~70*140°
KB-SL168W-P50-3030	SMD3030/2835	168pcs	L286*W96mm	Polarized 50°

Direction for Use

(透镜 | LENS)

- 1, Please use some soft paper or pure water to clean lens (reflector)
- 2, Don't use any industrial solvent to clean lens surface , such as alcohol
- 3, Storage environment : Temperature 0~40°C , Humidity 30%~95%
- 4, This kind of lens can make the lighting more concentrated, and it's made from transparent material , so please do not open the packages until you use them, in case of the dust and other pollutions.

Light Distribution Curve (配光曲线图):

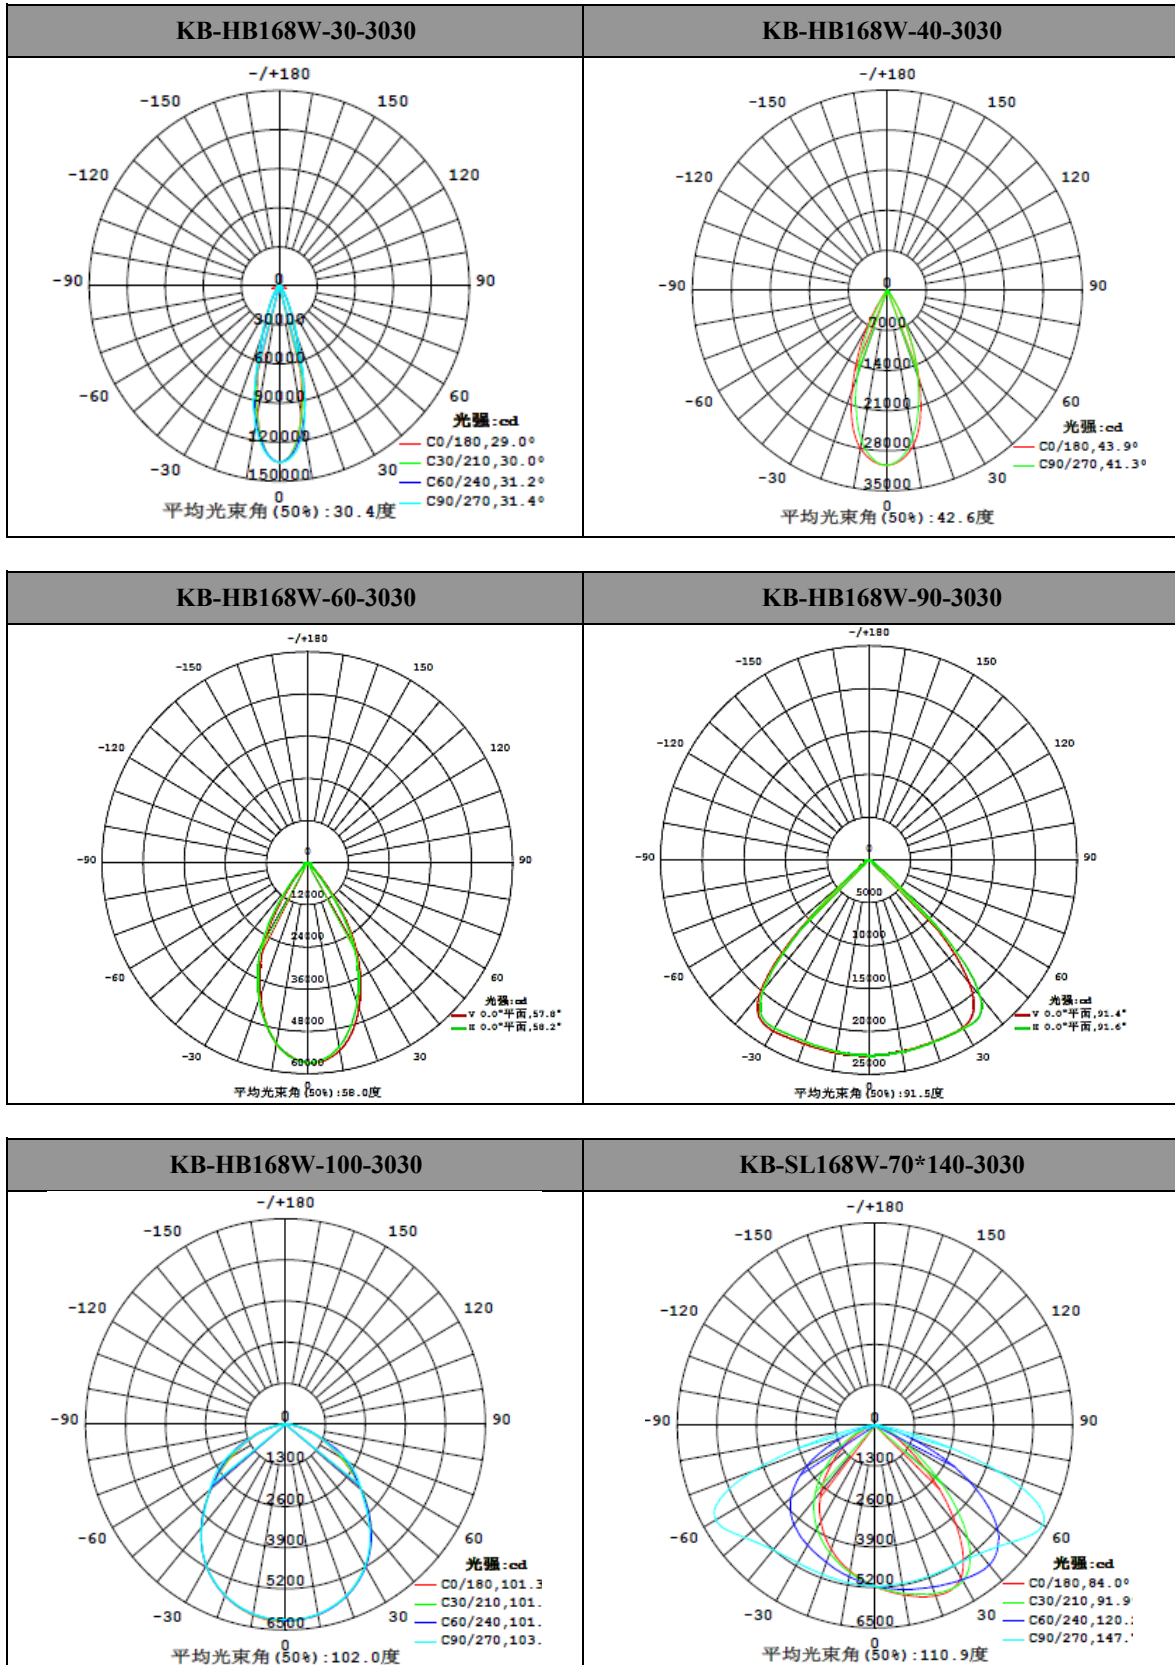

Light Distribution Curve (配光曲线图):

KB-SL168W-P50-3030	
Coming soon	

Mechanical Characteristics (产品尺寸):

