


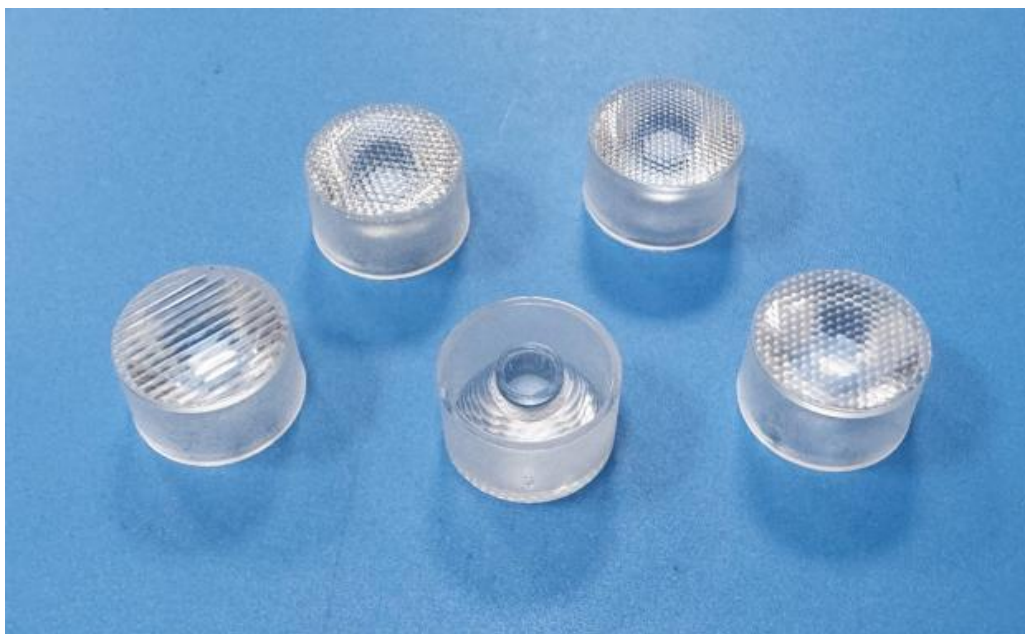

Product Parameters (产品描述)

产品编号 | Part Number: KB-M15-xxF-3030
出光角度 | Beam Angle: 20/30/60/15*40°
产品材料 | Material: PC
工作温度 | Work Temp: <90℃

安装方式 | Fastening: Glue
支架颜色 | N/A
透光率 | Transmittance: 88%
匹配LED | Match Led: Flat 3030 Leds

Part Number	Lens Surface	Dimension	Beam Angle
KB-M15-20PF-3030	珠面/beads	Φ15*H8.4mm	~20°
KB-M15-30PF-3030	珠面/beads	Φ15*H8.4mm	~30°
KB-M15-60PF-3030	珠面/beads	Φ15*H8.4mm	~60°
KB-M15-1540F-3030	条纹/Ellipse	Φ15*H8.4mm	~15*40°

Direction for Use

(透镜 | LENS)


- 1, Please use some soft paper or pure water to clean lens (reflector)
- 2, Don't use any industrial solvent to clean lens surface , such as alcohol
- 3, Storage environment : Temperature 0~40℃ , Humidity 30%~95%
- 4, This kind of lens can make the lighting more concentrated, and it's made from transparent material , so please do not open the packages until you use them, in case of the dust and other pollutions.

Light Distribution Curve (配光曲线图):

Part Number: KB-M15-20PF-3030

LED: SMD-3030


Beam Angle: 19.1°

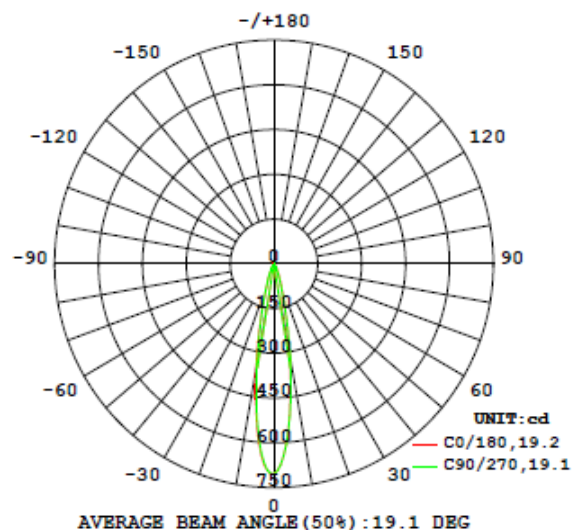

Part Number: KB-M15-35PF-3030

LED: SMD-3030


Beam Angle: 35.0°

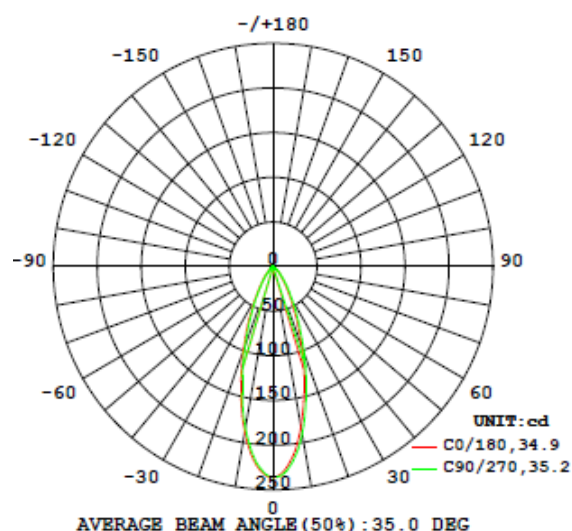

Part Number: KB-M15-60PF-3030

LED: SMD-3030

Beam Angle: 61.7°

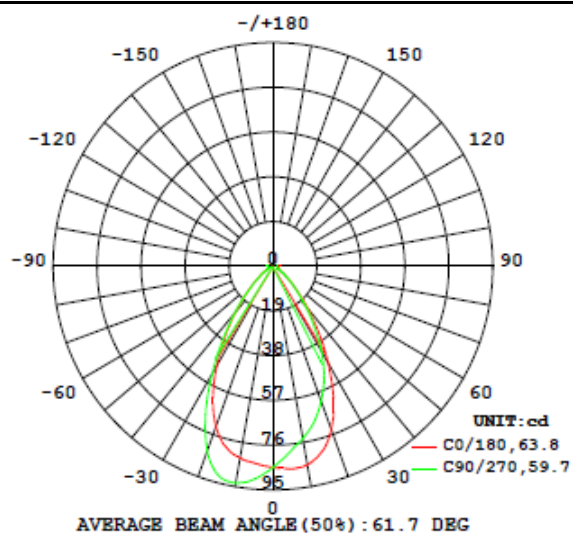


Light Distribution Curve (配光曲线图):

Part Number: KB-M15-1540F-3030

LED: SMD-3030

Beam Angle: 17.4°/40.3°

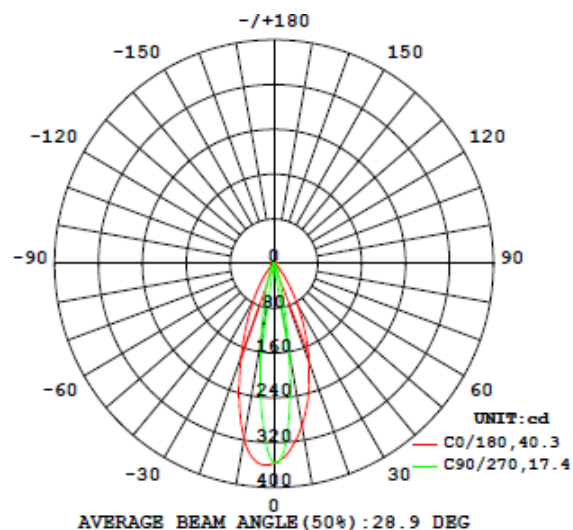

Mechanical Characteristics (产品尺寸):

